



## ROBUS RCBWS2 Switch Connect Ble Wall Switch Instruction Manual

[Home](#) » [ROBUS](#) » ROBUS RCBWS2 Switch Connect Ble Wall Switch Instruction Manual 

### ROBUS RCBWS2 Switch Connect Ble Wall Switch Instruction Manual



PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician

#### **Note**

Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site [www.robus.com](http://www.robus.com) or [robustdirect.com](http://robustdirect.com)

Must be used with corresponding gateway RGBW

## Contents

- [1 Specification](#)
- [2 Indicator status](#)
- [3 Switch Button Operation](#)
- [4 Installation](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## Specification

Battery: CR2430 3V DC  
Communication: Bluetooth Mesh  
Dimension: 86x86x13mm  
Working Range: 25m open area  
Working Temperature: 10 C ~ 45 C  
Working Humidity: <90%RH  
Battery Life: 50000 hours

## Indicator status

Fast Flash: Gateway in pairing mode. 13mm

## Switch Button Operation

Each button can control 3 scenes via the ROBUS CONNECT app


Single Press: Activate 1st Scene

Double Press: Activate 2nd Scene

Long Press (3s): Activate 3rd Scene

## Install/Replace battery:

Battery: Remove film

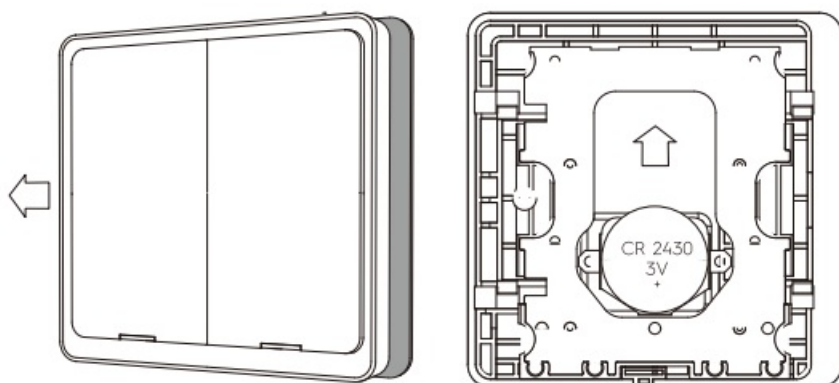


1. Push the front panel to the left to open
2. Remove old battery then push new CR2430 battery into slot

## Installation

1. Download ROBUS CONNECT App from ROBUS website, register and login to App on your smart phone.
2. Add to the appropriate gateway (RCBGW) into the APP (See the instruction manual of RCBGW on ROBUS website).
3. Press switch (RCBWS2) for more than 10s until LED indicator flashes quickly, scene switch will be in pairing mode.
4. Open the APP, go into the smart gateway page, click “search new device” and follow app instruction to complete operation.
5. Wait for device to find gateway 1-3min. Click “Done” to complete the process. Note: If device not found move gateway closer to switch.
6. After connecting successfully, Switch will appear on homepage of the app. Tap switch icon, select button, then tap “Add intelligence”.
7. Edit scene name. Add task description name. Select Single, Double or Long Press condition. Add desired tasks. Tap Save



Scan QR to download the APP

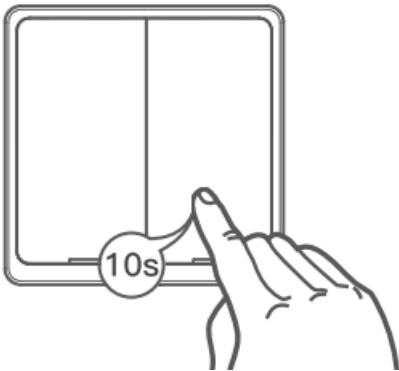

#### **L.E.D lighting & Electrical Distribution Group UC**

IRE: Nangor Road, Dublin 12, D12 E7VP, Ireland

UK: Bracknell Enterprise & Innovation Hub, Ocean House, 12th Floor, The Ring, Bracknell, Berkshire RG12 1AX, UK



Tel: +353 1 7099000

Fax: +353 1 7099060

Email: [info@robus.com](mailto:info@robus.com)

Website: [www.robus.com](http://www.robus.com)

Documents / Resources

	<p><a href="#">ROBUS RCBWS2 Switch Connect Ble Wall Switch</a> [pdf] Instruction Manual RCBWS2, Switch Connect Ble Wall Switch</p>
---	--

References

- ROBUS [robustdirect](#)
- R [ROBUS: Home to Best-in-Class LED Lighting and Customisation - Robus](#)