



ROCKBOARD ISO Power Block V6+ Multi Power Supply User Manual

[Home](#) » [ROCKBOARD](#) » ROCKBOARD ISO Power Block V6+ Multi Power Supply User Manual 

Contents


- [1 ROCKBOARD ISO Power Block V6+ Multi Power Supply](#)
- [2 OverView](#)
- [3 DESCRIPTION](#)
- [4 POWER SUPPLY](#)
 - [4.1 CONNECTION AND USE](#)
- [5 INCLUDED ACCESSORIES](#)
- [6 SPECIFICATIONS](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



ROCKBOARD ISO Power Block V6+ Multi Power Supply



Overview

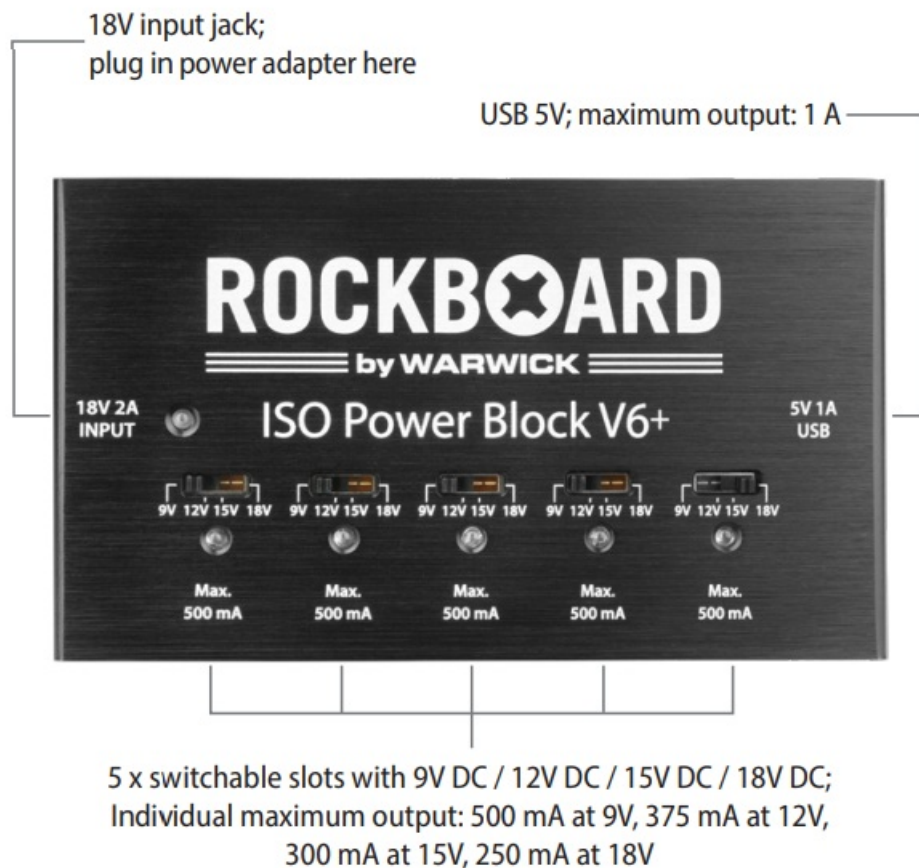

DESCRIPTION

The RockBoard® ISO Power Block V6+ is a multi-power supply for effects pedals, designed with 5 isolated transformers and highly filtered 9V DC power slots and a single USB-slot:

- 5 x switchable slots with 9V DC / 12V DC / 15V DC / 18V DC -each with a maximum current output of:
 - 500 mA at 9V,
 - 375 mA at 12V,
 - 300 mA at 15V,
 - 250 mA at 18V
- 1 x USB 5V with a maximum current output of 1 A

The RockBoard® ISO Power Block V6+ was designed for powering up to 5 effects pedals simultaneously without any noise. The advanced filtering technology used in the 9V DC power slots prevents high frequency noise. Built with individual slot short circuit protection, connected effects pedals are protected in case of a short circuit. With a designated LED for each power slot indicating the slot is working correctly, you can quickly identify any problems without losing power to the remaining pedals.

POWER SUPPLY

The RockBoard® ISO Power Block V6+ is powered by an included 18V DC power adapter, with a current output of 2,000 mA. It is rated for an input voltage of 100 to 240 volts and 47 to 63 Hz alternate current.

CAUTION: Please use only included power adapter or one with identical specifications to avoid overheating and damage to the unit.

CONNECTION AND USE

1. Connect the included power adapter to the input socket of the ISO Power Block V6+.
2. Insert the correct regional plug adapter into the power adapter.
3. Connect the power adapter to the outlet – the power indicator LED will light up.
4. Connect included power cables to your effects pedals and the ISO Power Block V6+

IMPORTANT NOTES: Make sure to use only effects pedals with a polarity of (-) center / (+) outside and with the correct input voltage, to prevent damage to your effect pedals. Check that the current draw of your effects pedals does not exceed the maximum current output of each slot and the max. total current output.

INCLUDED ACCESSORIES

- 1 x 18V DC power adapter (2,000 mA) with exchangeable multi-regional plug adapters (EU, UK, US/CA, AU/NZ), input voltage 100-240V AC
- 5 x RockBoard Flat Power Cable, 60 cm – for connecting effects pedals

SPECIFICATIONS

- 5 isolated transformers & highly filtered switchable power slots with 9V DC / 12V DC / 15V DC / 18V DC – each with a maximum current output of 500 mA at 9V, 375 mA at 12V, 300 mA at 15V, 250 mA at 18V, 2.1 x 5.5 mm barrel plug, polarity (-) center)
- Maximum output power: 22.5 W
- 1 x USB 5V with a maximum current output of 1 A
- Individual status LED and short circuit protection for all power slots
- Virtually noise-free operation
- Input voltage: 18V DC
- Dimensions: (L x W x H): 120 x 70 x 26 mm / 4 23/32" x 2 3/4" x 1 1/32"
- Weight: 195 g / 0.43 lbs

USA DISTRIBUTION: Framus & Warwick Music USA, Inc. | info@rockboard.net | 629.202.6790

CHINESE DISTRIBUTION: Warwick Music Equipment Trading (Shanghai) Co. Ltd. | info@warwick.cn | +862134060110

NORTH EUROPEAN DISTRIBUTION: www.rockboard.de | info@rockboard.de | www.w-distribution.de | www.facebook.com/warwickmusicdistribution

Headquarters: Warwick GmbH & Co. Music Equipment KG | 08258 Markneukirchen / Germany | +49 (0) 37422 / 555 – 0

Family Owned

Solar Powered

Sustainably Manufactured in a Green Environment

Documents / Resources



[ROCKBOARD ISO Power Block V6+ Multi Power Supply](#) [pdf] User Manual
ISO Power Block V6 Multi Power Supply, Multi Power Supply, Power Supply, ISO Power Block V6, Block V6

References

-  [Startseite](#)
-  [W-Music Distribution](#)

Manuals+.