




ROCKBOARD RBO-POW-BLO-ISO-6 Iso Power Block V6 Instruction Manual

[Home](#) » [ROCKBOARD](#) » ROCKBOARD RBO-POW-BLO-ISO-6 Iso Power Block V6 Instruction Manual 

ROCKBOARD RBO-POW-BLO-ISO-6 Iso Power Block V6

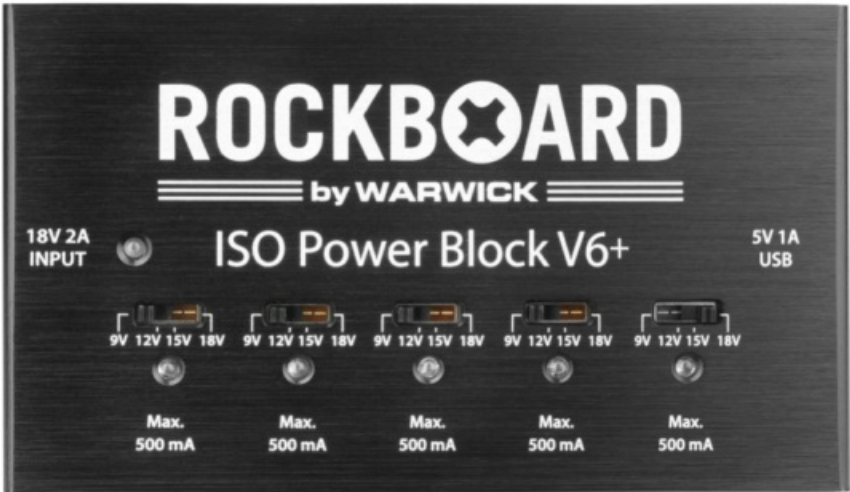


Contents

- [1 DESCRIPTION](#)
- [2 POWER SUPPLY](#)
- [3 CONNECTION AND USE](#)
- [4 INCLUDED ACCESSORIES](#)
- [5 SPECIFICATIONS](#)
- [6 Customer Support](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

DESCRIPTION

The RockBoard® ISO Power Block V6 is a multi-power supply for effects pedals with 5 isolated transformers and highly filtered 9V DC power slots and a single 18V DC link output to connect multiple ISO Power Blocks V6 in series for larger setups:

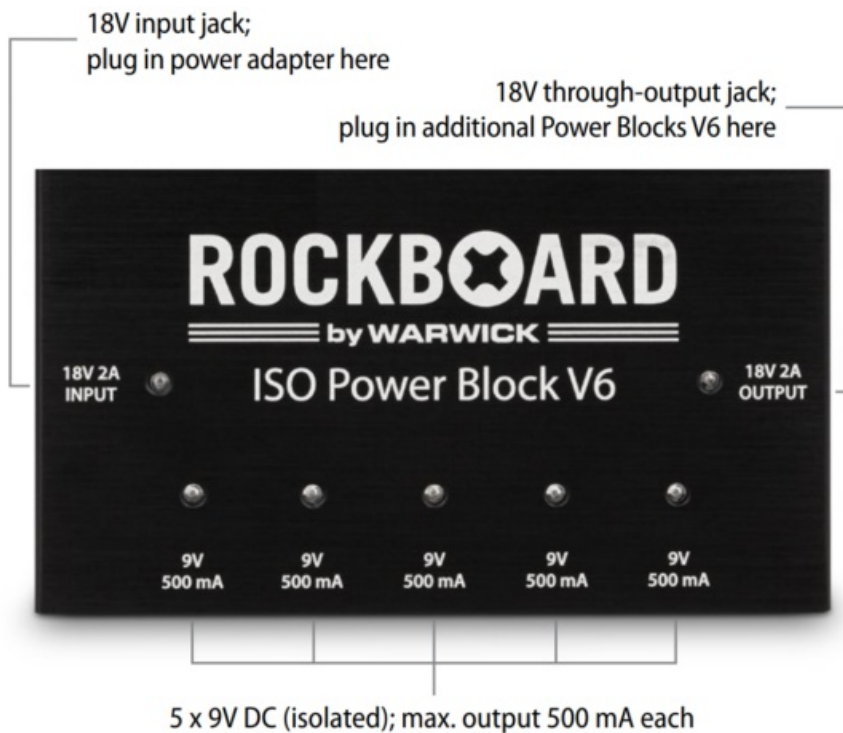

- 5 x 9V DC, maximum current output 500 mA each
- 1 x 18V DC, maximum current output 2,000 mA

The power supply was designed for powering up to 5 effects pedals simultaneously without any noise and has the capacity to link multiple ISO Power Blocks V6 for larger effects setups with more than 5 pedals. The advanced filtering technology used in the 9V DC power slots prevents high frequency noise. Built with individual slot short circuit protection, connected effects pedals are protected in case of a short circuit. Designated red LEDs for each power slot indicate short circuits or wrong polarity. You can quickly identify any problems without losing power to the remaining pedals.

POWER SUPPLY

The RockBoard® ISO Power Block V6 is powered by an included 18V DC power adapter, with a current output of 2,000 mA. It is rated for an input voltage of 100 to 240 volts and 47 to 63 Hz alternate current.

CAUTION: Please use only included power adapter or one with identical specifications to avoid overheating and damage to the unit.

CONNECTION AND USE

1. Connect the included power adapter to the input socket of the ISO Power Block V6.
2. Insert the correct regional plug adapter into the power adapter.
3. Connect the power adapter with main power – the power indicator LED will light up.
4. Connect included power cables to your effects pedals and the ISO Power Block V6.
5. If you want to link multiple ISO Power Blocks V6, connect the second unit with the 18V DC output of the first unit.

IMPORTANT NOTES: Make sure to use only effects pedals with a polarity of (-) center / (+) outside and with the correct input voltage, to prevent damage to your effect pedals. Also please check that the current draw of your effects pedals does not exceed the maximum current output of each slot and the max. total current output.

INCLUDED ACCESSORIES

- 1 x 18V DC power adapter (2,000 mA) with exchangeable multi-regional plug adapters (EU, UK, US/CA, AU/NZ), input voltage 100-240V AC
- 6 x RockBoard Flat Power Cable, 60 cm – for connecting effects pedals.

SPECIFICATIONS

- 5 isolated transformers & highly filtered power slots (9V DC, 500 mA each, 2.1 x 5.5 mm barrel plug, polarity (-) center)
- 1 unisolated power slot (18V DC, 2,000 mA)
- Short circuit protection for all power slots, designated red LEDs for each slot indicate short circuit or wrong polarity
- Virtually noise-free operation
- Input polarity protection
- **Total output power:** 22.5 W (2,500 mA)
- **Input voltage:** 18V DC
- **Dimensions** (L x W x H): 120 x 70 x 25 mm / 4 23/32" x 2 3/4" x 63/64"
- **Weight:** 175 g / 0.38 lbs

Customer Support

USA DISTRIBUTION: Framus & Warwick Music USA, Inc. | info@rockboard.net | 629.202.6790


NORTH EUROPEAN DISTRIBUTION: www.rockboard.de | info@rockboard.de | www.w-distribution.de | www.facebook.com/warwickmusicdistribution

Headquarters: Warwick GmbH & Co. Music Equipment KG | 08258 Markneukirchen / Germany | +49 (0) 37422 / 555 – 0

Family Owned • Solar Powered • Sustainably Manufactured in a Green Environment



Documents / Resources

| | |
|---|---|
|  | <p>ROCKBOARD RBO-POW-BLO-ISO-6 Iso Power Block V6 [pdf] Instruction Manual RBO-POW-BLO-ISO-6 Iso Power Block V6, RBO-POW-BLO-ISO-6, Iso Power Block V6, Power Block V6, Block V6, V6</p> |
|---|---|

References

- [W W-Music Distribution](#)
- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.