

[Manuals.plus](#) /

› [Midea](#) /

› Midea HK 7.62 BL Wall-Mounted Range Hood User Manual - 60cm, 650m³/h, Gesture Control

Midea WHK 7.62002

Midea HK 7.62 BL Wall-Mounted Range Hood User Manual

Model: WHK 7.62002

1. INTRODUCTION

Thank you for choosing the Midea HK 7.62 BL Wall-Mounted Range Hood. This manual provides essential information for the safe installation, operation, and maintenance of your appliance. Please read these instructions carefully before use and retain them for future reference.



Image 1.1: Front view of the Midea HK 7.62 BL Wall-Mounted Range Hood.

2. SAFETY INFORMATION

To reduce the risk of fire, electric shock, or injury, observe the following safety precautions:

- Ensure the power supply matches the voltage specified on the rating label.

- Installation must be performed by a qualified technician in accordance with local regulations.
 - Do not operate the hood if the power cord is damaged. Contact customer service for replacement.
 - Always disconnect the appliance from the power supply before cleaning or maintenance.
 - Do not flambé under the range hood.
 - Regularly clean grease filters to prevent grease accumulation, which can be a fire hazard.
 - Maintain a minimum safe distance between the hob and the range hood as specified in the installation instructions.
-

3. WHAT'S IN THE BOX

Verify that all components are present upon unpacking:

- Midea HK 7.62 BL Range Hood unit
 - Power plug
 - Installation hardware (screws, wall plugs, brackets)
 - Instruction Manual
-

4. SETUP AND INSTALLATION

The Midea HK 7.62 BL range hood is designed for wall-mounted installation. Detailed instructions are provided to facilitate the process.

4.1 Installation Considerations

- **Dimensions:** The hood measures 600 × 430 × 415 mm.
- **Adjustable Chimney:** The adjustable height chimney allows for flexible installation to suit your kitchen layout.
- **Mounting Height:** Ensure adequate clearance above the cooking surface for optimal performance and safety. Refer to the diagram below for guidance.

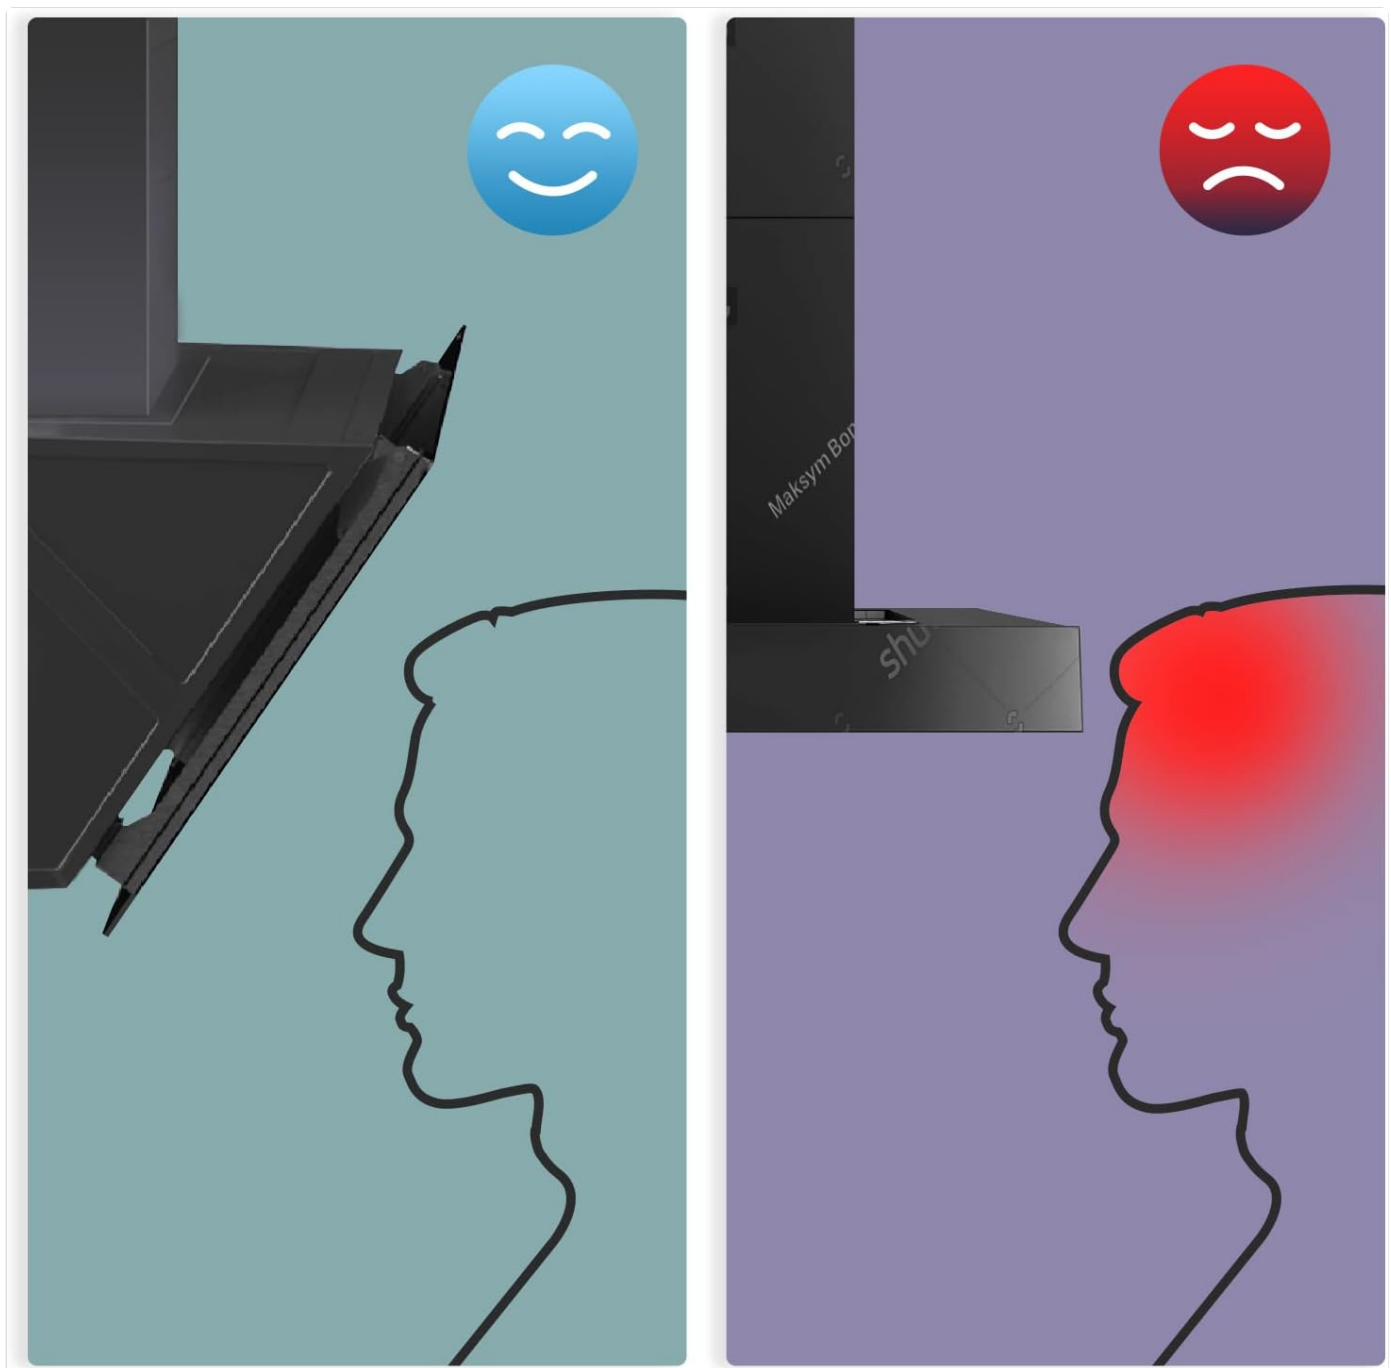


Image 4.1: Illustration of recommended hood mounting height for user comfort and safety.

4.2 Ventilation Modes

This range hood supports two ventilation modes:

- **Exhaust Air Extraction:** Air is vented outside through a ducting system. No carbon filter is required for this mode.
- **Internal Air Recirculation:** Air is filtered and returned to the kitchen. For this mode, a carbon filter (Midea B098XFHFY3) must be purchased separately and installed.

ZWEI ABZUGSOPTIONEN



Umluftmodus



Abzugsmodus

Image 4.2: Comparison of exhaust mode (right) and recirculation mode (left) with optional carbon filter shown for recirculation.

5. OPERATING INSTRUCTIONS

The Midea HK 7.62 BL range hood features intuitive controls for efficient operation.

5.1 Control Panel

The hood is equipped with a clear touch display and gesture control for ease of use.



Gesture Control

Einfach zu verstehen und intuitiv zu bedienen

Image 5.1: User interacting with the touch-sensitive control panel.

5.2 Functions

- **Power On/Off:** Use the designated touch button or gesture to turn the hood on or off.
- **Speed Levels:** Select from three power options to adjust the suction strength according to your cooking needs. The strong airflow of 650 m³/h effectively removes odors, steam, and grease.
- **LED Lighting:** Touch the light icon to activate the integrated LED lighting, providing clear visibility over your cooking area.
- **Gesture Control:** Wave your hand in front of the sensor to control basic functions like power and speed without touching the panel.



Image 5.2: The hood in operation, demonstrating its powerful 650 m³/h extraction capacity.

6. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your range hood.

6.1 Cleaning the Aluminum Grease Filter

The Midea range hood is equipped with a 5-layer aluminum filter that effectively captures grease and solid particles. This filter is removable and easy to clean.

- **Frequency:** Clean the grease filters regularly, typically every 2-4 weeks depending on usage.
- **Removal:** Carefully unlatch and remove the filter panels from the hood.
- **Cleaning:** Wash the filters by hand in hot soapy water or in a dishwasher. Ensure they are completely dry before reinstallation.
- **Reinstallation:** Insert the dry filters back into their slots, ensuring they are securely latched.



Image 6.1: Exploded view of the 5-layer aluminum grease filter for easy cleaning.

6.2 Cleaning the Hood Surface

Clean the exterior surfaces of the hood with a soft cloth and a mild, non-abrasive detergent. Avoid using harsh chemicals or abrasive pads that could damage the glass or painted steel finish.

6.3 Carbon Filter Replacement (Recirculation Mode Only)

If using the recirculation mode, the carbon filters (Midea B098XFHFY3) will need periodic replacement. Refer to the carbon filter's specific instructions for replacement frequency and procedure.

7. TROUBLESHOOTING

Before contacting customer service, try the following solutions for common issues:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Hood does not turn on	No power supply; Power cord disconnected; Fuse blown	Check power connection; Ensure plug is fully inserted; Check household fuse/circuit breaker
Low suction power	Grease filters clogged; Incorrect speed setting; Obstruction in ducting (exhaust mode)	Clean grease filters; Select a higher speed setting; Check ducting for blockages
Lights not working	LED bulb faulty; Loose connection	Contact customer service for LED replacement; Check connections (if accessible and safe)
Excessive noise	Loose components; Fan obstruction; Incorrect installation	Check for loose screws or parts; Remove any obstructions; Verify correct installation

8. SPECIFICATIONS

Feature	Detail
Brand	Midea
Model Number	WHK 7.62002
Product Dimensions	59.7 x 36 x 40 cm
Item Weight	19.54 Kilograms
Material	Glass
Color	Black
Mounting Type	Wall-mounted
Control Type	Touch, Gesture Control
Ventilation Type	Exhaust, Recirculation
Airflow Capacity	650 m³/h
Noise Level	59 dB
Voltage	20 Volt
Special Feature	Gesture control, Digital touch display, LED lighting
Included Components	Range hood, power plug



Midea

WHK 7.62 BL

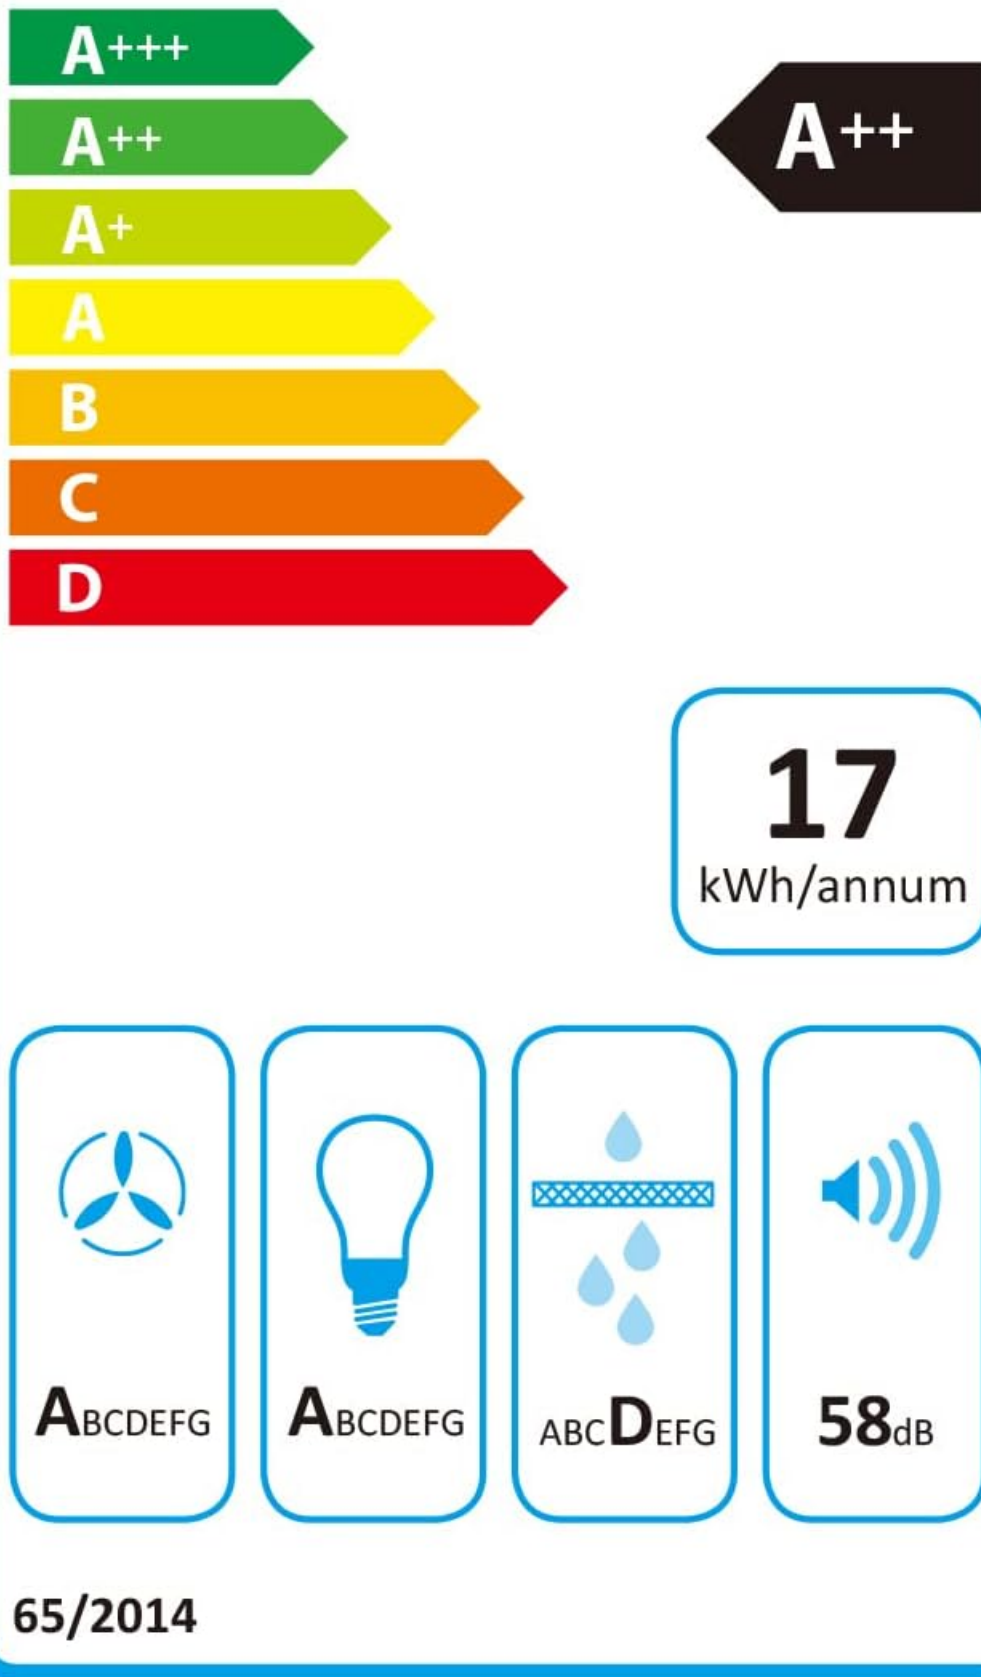


Image 8.1: Energy efficiency label for Midea WHK 7.62 BL.

9. WARRANTY AND SUPPORT

For warranty claims, returns, or technical support, please refer to the following information:

- **Returns Policy:** If you wish to return a product within 30 days of receipt because you changed your mind, please consult the retailer's help page on returns.
- **Defective or Damaged Products:** If you received a defective or damaged product, please consult the retailer's help page on defective items.
- **Marketplace Purchases:** For specific information on purchases made on the Marketplace, please consult the relevant help page provided by the retailer.
- **Manufacturer Support:** For further technical assistance or inquiries regarding your Midea product, please visit the official Midea website or contact their customer service.