



# SAFEVIEW BCCQ-002 Camera Smart Home Use Auto Tracking User Manual

[Home](#) » [SAFEVIEW](#) » **SAFEVIEW BCCQ-002 Camera Smart Home Use Auto Tracking User Manual** 

## Contents

- [1 SAFEVIEW BCCQ-002 Camera Smart Home Use Auto Tracking User Manual](#)
- [2 SAFEVIEW USER MANUAL INSTALL THE APP](#)
- [3 DEVICE BOOT](#)
- [4 OPTION 1: LOCAL MODE](#)
- [5 Note:](#)
- [6 OPTION 2: REMOTE MODE](#)
- [7 CLICK ON THE PREVIEW PAGE TO ENTER THE MONITORING INTERFACE](#)
- [8 STORAGE CARD](#)
- [9 Note:](#)
- [10 TROUBLESHOOTING](#)
- [11 INSTRUCTIONS FOR RECYCLING AND DISPOSAL:](#)
- [12 Read More About This Manual & Download PDF:](#)
- [13 Documents / Resources](#)
  - [13.1 References](#)

# SAFEVIEW BCCQ-002 Camera Smart Home Use Auto Tracking User Manual



## SAFEVIEW USER MANUAL INSTALL THE APP

Use your mobile phone to scan the following QR code, select the IOS or Android version according to the mobile phone system to install the APP. APP name: JXLCAM.



## DEVICE BOOT

Connect the device to the 5V power supply with the equipped USB cable, the red indicator light is always on, the device enters the waiting state, the network is successfully configured, and the red light flashes once.

## OPTION 1: LOCAL MODE

When there is no WiFi in the environment, you can use the AP mode to connect, the effective distance of this mode does not exceed 10m, Localized monitoring and viewing can be realized.


### Note:

1. Each device has a unique WiFi name (device ID), and the format is unified as "BCCQ ";
2. In the local mode, the remote control lens rotation operation is not If you need to shoot and store videos, please install an TF card.

## OPTION 2: REMOTE MODE

If you want to use the complete functions of the device and realize remote monitoring, you need to configure the remote mode.

- First confirm that there is an available WiFi signal near the device, power on the monitoring device, the red indicator light flashes, and the device enters the standby state. (Note: Only supports WiFi signal of 4G frequency band)
- Connect the mobile phone to the WiFi in your environment, open the software JXLCAM, and follow the steps below:

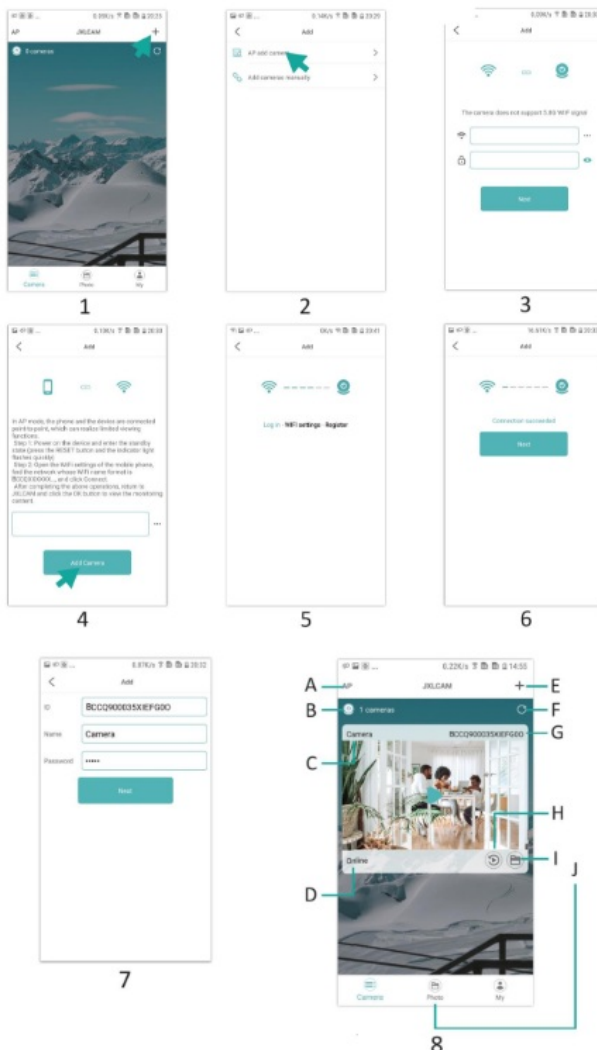

1. Click '+'
2. Select 'AP add'
3. Select and connect to the site WiFi, enter the password and proceed to the next step
4. Connect to camera WiFi, add camera
5. Wait for the camera to connect to the network
6. Connection with the network is established
7. Customize the name
8. You can view the camera preview on the homepage

A: Local mode  
 B: Number of connected devices C: Device name  
 D: Network status E: Add device  
 F: Refresh page G: Product ID  
 H: TF card playback file  
 I and J: Manually recorded files

## CLICK ON THE PREVIEW PAGE TO ENTER THE MONITORING INTERFACE



1. Photo
2. Listen
3. Username and password settings
4. Battery indicator
5. Recording
6. Landscape view switch

## STORAGE CARD

1. If you need to store the video content, you need to install a TF card, please be sure to install the memory card
2. The device supports a memory card with a maximum capacity of 128G. When the TF card is installed and the mobile phone is disconnected, the device will automatically start recording, and the video will be automatically packaged in sections. When the capacity of the TF card is insufficient, the oldest video will be automatically deleted, and the recording will be looped; the TF card recording file will automatically be recorded according to the year, month and Time to save hierarchically.
3. When the mobile APP is connected to the device, it will automatically exit the

### Note:

1. If the TF card is abnormal on the playback page, please check the status of the TF card, power off and remove the card and format it before reinstalling;
2. TF card specification should be above C4

## TROUBLESHOOTING

1. When the device fails to configure the network, please check whether the router and WiFi password are configured correctly (the device does not support 5G WiFi). After confirming that it is correct, you can press and hold the reset button for about 5 seconds until the device indicator flashes quickly, restore the factory settings, and then Re-distribute the network

- 2. When the software homepage shows that the device is offline, you can check whether the device is normally powered on, and click the refresh icon in the upper right corner to
- 3. The device name and password can be The initial password of the device is : admin.


**INSTRUCTIONS FOR RECYCLING AND DISPOSAL:**

This label means that the product cannot be disposed of as other household waste throughout the EU. To prevent potential damage to the environment or human health from uncontrolled waste disposal. Recycle responsibly to promote the sustainable use of material resources. If you want to return a used device, use the drop-off and collection system, or contact the retailer from whom you bought the product. The retailer can accept the product for environmentally safe recycling.

A declaration by the manufacturer that the product complies with the requirements of the applicable EU Directives.

***Read More About This Manual & Download PDF:***

**Documents / Resources**

	<p><a href="#">SAFEVIEW BCCQ-002 Camera Smart Home Use Auto Tracking</a> [pdf] User Manual</p> <p>BCCQ-002 Camera Smart Home Use Auto Tracking, BCCQ-002, Camera Smart Home Use Auto Tracking, Smart Home Use Auto Tracking, Home Use Auto Tracking, Use Auto Tracking, Auto Tracking, Tracking</p>
--	---

**References**

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.