




SAGE LU MEI V4 RGBW/RGB/CCT/Dimming 4 Channel LED RF Controller Installation Guide

[Home](#) » [SAGE LU MEI](#) » SAGE LU MEI V4 RGBW/RGB/CCT/Dimming 4 Channel LED RF Controller Installation Guide 

SAGE LU MEI V4 RGB/WRGB/CCT/Dimming 4 Channel LED RF Controller

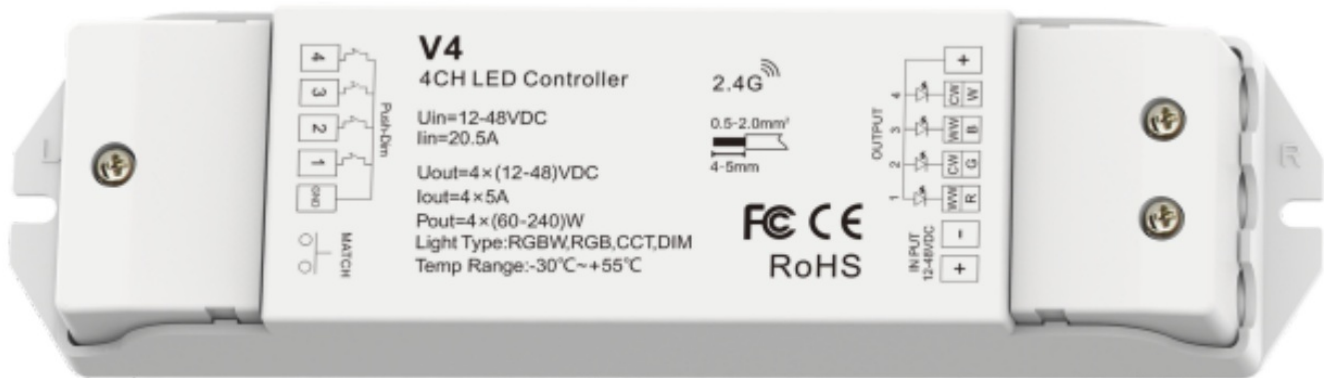

FC  CE RoHS  LVD RED

Contents

- [1 Features](#)
- [2 Technical Parameters](#)
- [3 Mechanical Structures and Installations](#)
- [4 Wiring Diagram](#)
- [5 Match Remote Control \(two match ways\)](#)
 - [5.1 Use the controller's Match key](#)
 - [5.2 Use Power Restart](#)
- [6 Light on/off fade time](#)
- [7 Push-Dim control](#)
- [8 RGB/RGBW dynamic mode list](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

Features

- Match with RF 2.4G single zone or multiple zone single color, dual color and RGB/RGBW remote control.
- One RF controller accept up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any flash.
- When using with RGB/RGBW light, built in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.
- Light on/off fade time 3s selectable.
- Connect with external push key to achieve on/off and 0-100% dimming function.
- Over-heat / Over-load / Short circuit protection, recover automatically

Technical Parameters

Input and Output	
Input voltage	12-48VDC
Input current	20.5A
Output voltage	4 x (12-48)VDC
Output current	4CH,5A/CH
Output power	4 x (60-240)W
Output type	Constant voltage

Environment

Operation temperature

Ta: -30 OC ~ +55 OC

Case temperature (Max.)

T c: +85OC

IP rating

Ip20

Warranty and Protection

Warranty

5 years

Protection

Reverse polarity Over-heat Over-load Short circuit

Dimming data


Input signal	RF 2.4GHz + Push Dim
Control distance	30m(Barrier-free space)
Dimming gray scale	4096 (2 ¹²) levels
Dimming range	0 -100%
Dimming curve	Logarithmic
PWM Frequency	1000Hz (default)

Safety and EMC

EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard(LVD)	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,LVD,RED


Weight	
Net weight	0.116kg
Gross weight	0.144kg

Mechanical Structures and Installations

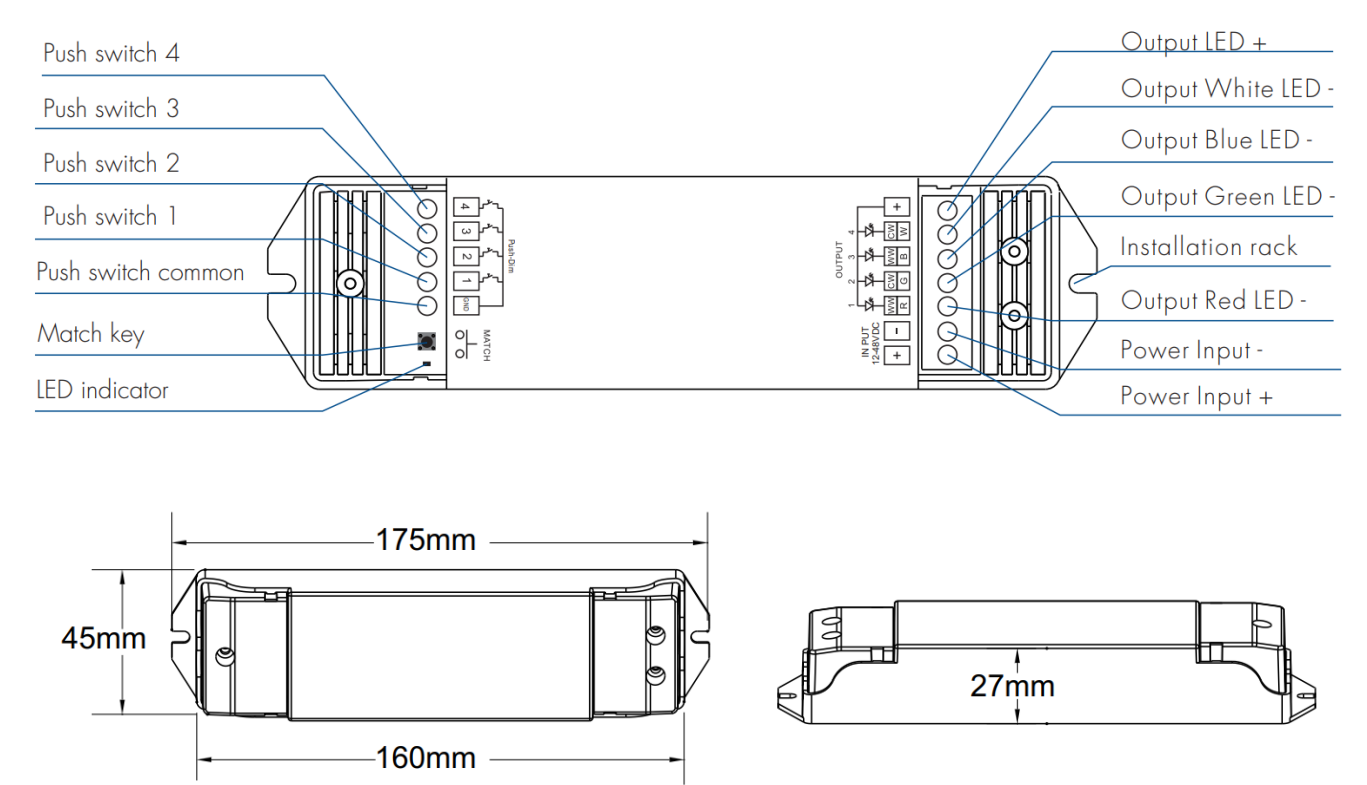


Wiring Diagram


- Wiring Diagram

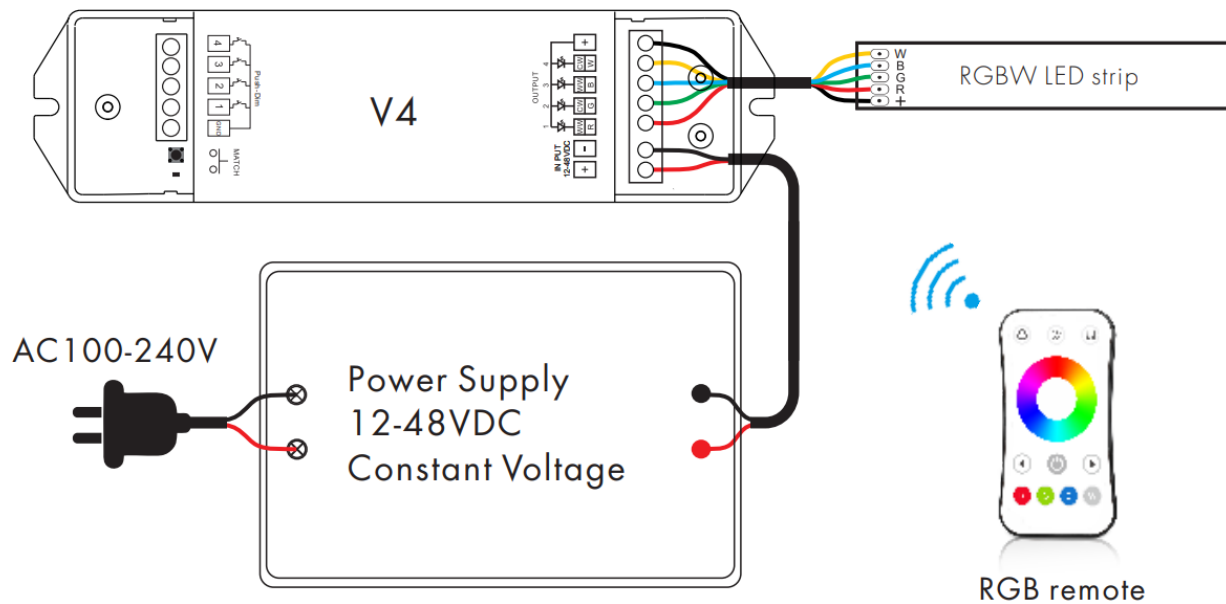


- V4 for dual color

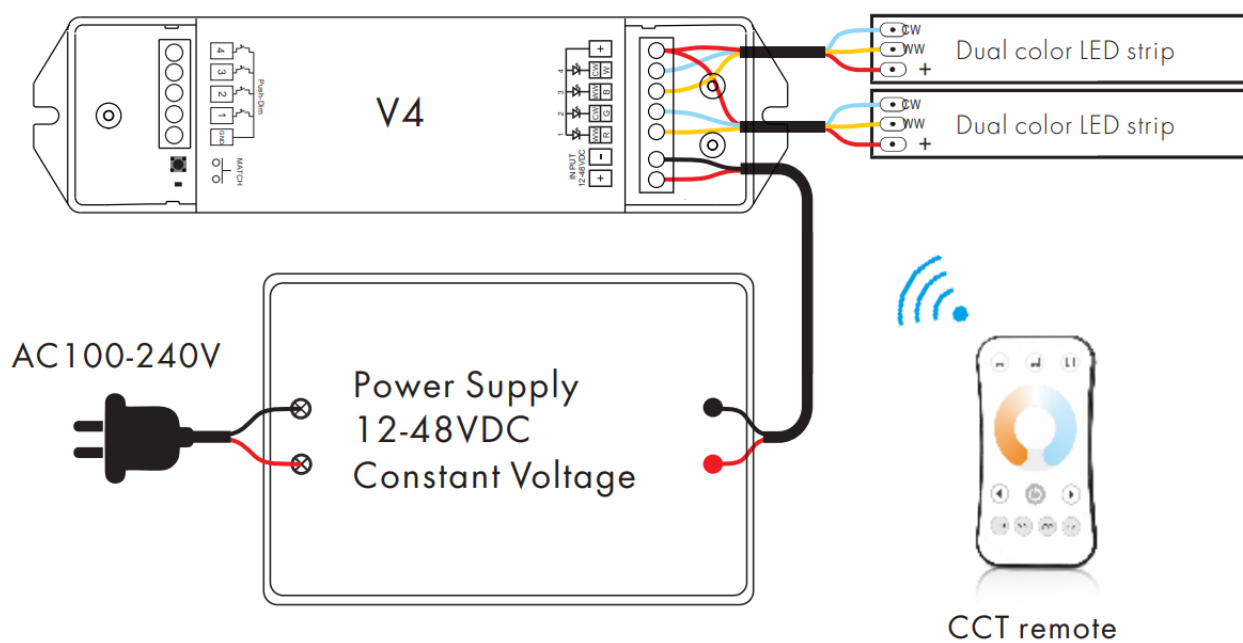

- V4 for single color

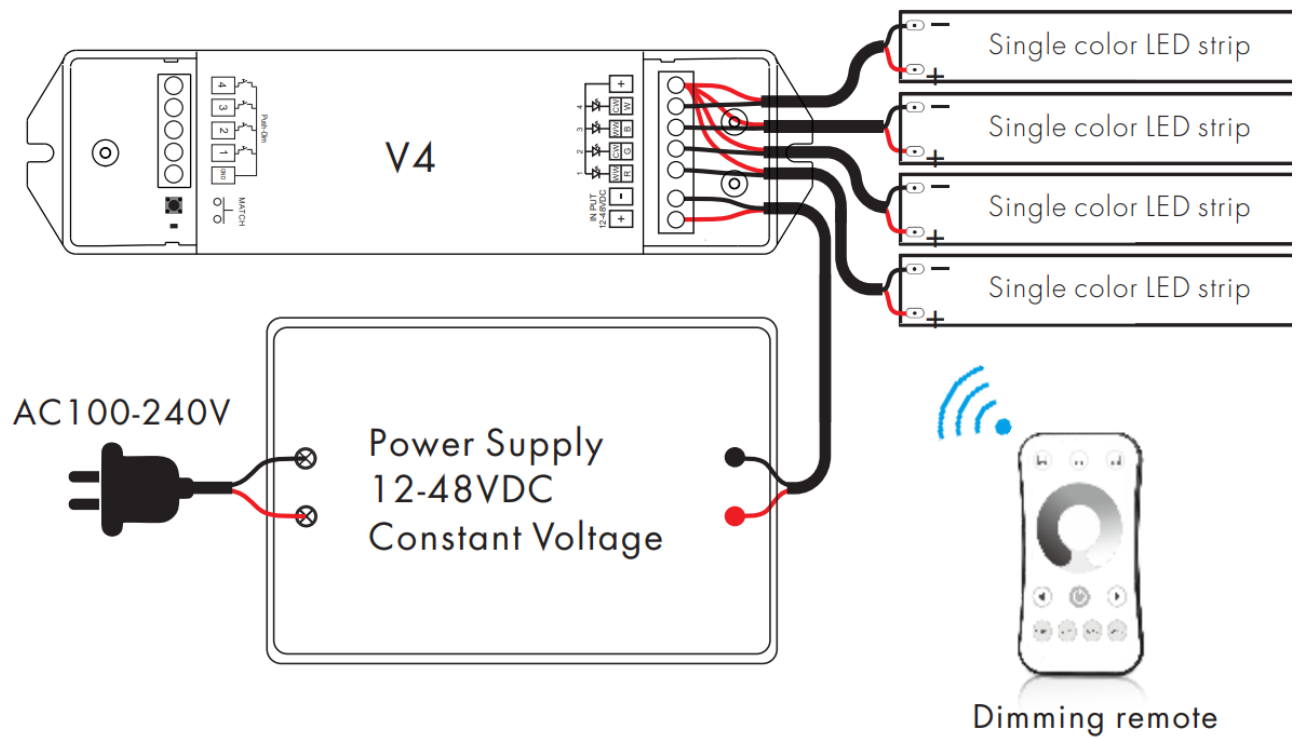

- V4 with four push key for 4 channel single color

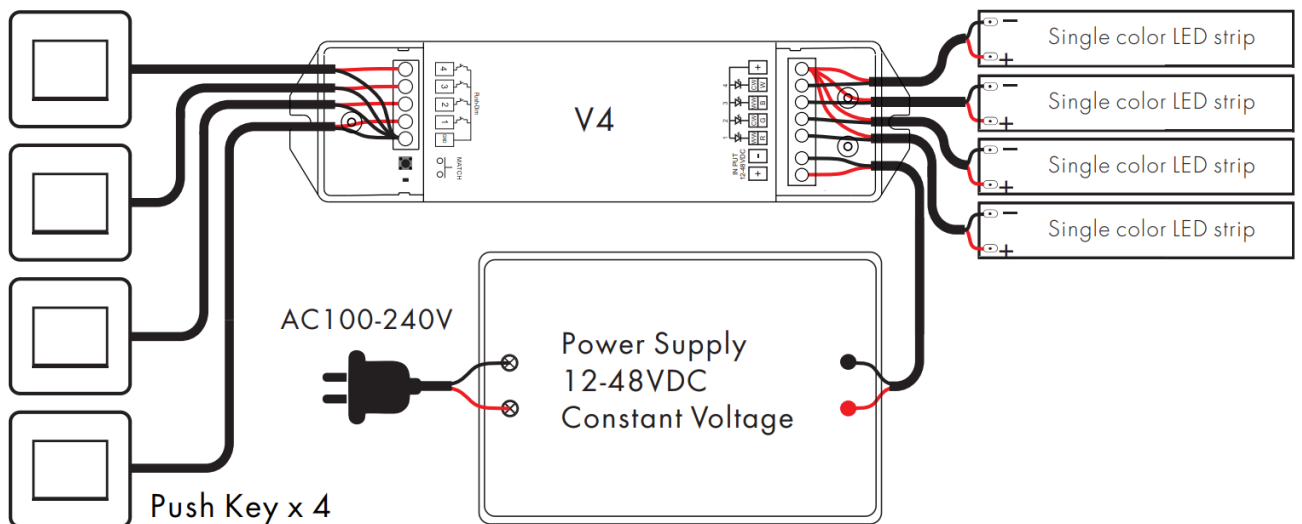

Match Remote Control (two match ways)

When match different color remote, the controller become different light type automatically. End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller's Match key

Match: Short press match key, immediately press on/off key (single zone remote) or zone key (multiple zone remote) of the remote. The LED indicator fast flash a few times means match is successful.

Delete: Press and hold match key for 5s to delete all match, The LED indicator fast flash a few times means all matched remotes were deleted.

Use Power Restart

Match: Switch off the power of the receiver, then switch on power. Repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times

means match is successful. .

Delete: Switch off the power of the receiver, then switch on power. Repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

Light on/off fade time

Long press match key 5s, then short press match key 3 times, the light on/off time will be set to 3s, the indicator light blink 3 times. Long press match key 10s, restore factory default parameter, the light on/off time also restore to 0.5s.

Push-Dim control

The 4 push key have 4 channel dimming function defaultly.

- **Short press:** Turn on or off each channel.
- **Long press (1-6s):** Press and hold to step-less dimming of each channel, With every other long press, the light level goes to the opposite direction.
- **Dimming memory:** Light returns to the previous dimming level when switched off and on again.

You also can long press push key and Match key at the same time to select 4 kinds light type, and each light type will have different push key function.

Long press 1 key and Match key 2 seconds, set as 4 channel single color type (default).

Long press 2 key and Match key 2 seconds, set as dual color type.

Long press 3 key and Match key 2 seconds, set as RGB type.

Long press 4 key and Match key 2 seconds, set as RGBW type.

at this time, if the light type has set as dual color, RGB or RGBW, match remote will not change light type.


If you want to cancel light type set, please long press Match key 10 seconds to restore factory setting.

Single color (4 CH)	1 key	Short press turn on/off 1 channel, long press 1-6s dim up/down
	2 key	Short press turn on/off 2 channel, long press 1-6s dim up/down
	3 key	Short press turn on/off 3 channel, long press 1-6s dim up/down
	4 key	Short press turn on/off 4 channel, long press 1-6s dim up/down
Dual color	1 key	Short press turn on/off light, long press 1-6s dim up/down
	2 key	Short press 3 levels color temperature (WW, NW, CW), long press 1-6s color temperature up/down
	3 key	Invalid
	4 key	Invalid
RGB	1 key	Short press turn on/off light, long press 1-6s dim up/down
	2 key	Short press change dynamic mode, long press 2s to set speed (1-10 levels)
	3 key	Short press change static RGB color (24 levels), long press 1-6s adjust saturation
	4 key	Invalid
RGBW	1 key	Short press turn on/off light, long press 1-6s dim up/down
	2 key	Short press change dynamic mode, long press 2s to set speed (1-10 levels)
	3 key	Short press change static RGB color (24 levels), long press 1-6s adjust saturation (W off)
	4 key	Short press turn on/off W channel (4 channel), long press 1-6s dim up/down (RGB off)

RGB/RGBW dynamic mode list

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Yellow cyan purple smooth	10	White fade in and out

Documents / Resources

	<p>SAGE LU MEI V4 RGBW/RGB/CCT/Dimming 4 Channel LED RF Controller [pdf] Installation Guide</p> <p>V4 RGBW RGB CCT Dimming 4 Channel LED RF Controller, V4, RGBW RGB CCT Dimming 4 Channel LED RF Controller, 4 Channel LED RF Controller, LED RF Controller</p>
---	--