

SALUKI TECHNOLOGY S1134 Series Multi-Channel Signal Generator Owner's Manual

Home » SALUKI TECHNOLOGY » SALUKI TECHNOLOGY S1134 Series Multi-Channel Signal Generator Owner's Manual ™

Contents

- 1 SALUKI TECHNOLOGY S1134 Series Multi-Channel Signal Generator
- **2 Product Information:**
- 3 Product Usage Instructions:
- **4 Key Features**
- **5 Overview**
- **6 Technical Specifications**
- 7 Ordering Information
- 8 Documents / Resources
 - 8.1 References



SALUKI TECHNOLOGY S1134 Series Multi-Channel Signal Generator



Product Information:

The S1134 Series Multi-channel Signal Generator is a versatile device designed for generating multiple RF signals simultaneously. With a frequency range of 10MHz to 40GHz, this signal generator is capable of producing signals across a wide range of frequencies. It

features 2 to 8 RF output channels that can operate independently, allowing users to generate multiple signals with different parameters simultaneously. The maximum output power of this signal generator is +15dBm, ensuring strong and reliable signal

transmission. Additionally, the phase noise of the S1134 Series Multi-channel Signal Generator is optimized for accurate and precise signal generation.

Product Usage Instructions:

- 1. Connect the S1134 Series Multi-channel Signal Generator to a power source using the provided power cable.
- 2. Ensure that all RF output channels are properly connected to the desired devices or equipment.
- 3. Power on the signal generator by pressing the power button located on the front panel.
- 4. Set the desired frequency range by using the frequency control knobs or inputting the frequency value using the numeric keypad.
- 5. If using multiple channels, select the desired channel(s) for operation. Each channel can be operated independently.
- 6. Adjust the output power level by using the power control knobs or entering the desired power value using the numeric keypad.
- 7. For precise signal generation, adjust the phase noise settings according to your requirements. Consult the user manual for detailed instructions on adjusting phase noise.
- 8. Once all settings are configured, press the "Generate" button to start generating RF signals.
- 9. Monitor the output signals using connected devices or equipment to ensure proper signal transmission.
- 10. To stop signal generation, press the "Stop" button or power off the signal generator.
- 11. Refer to the user manual for additional information on advanced features, troubleshooting, and maintenance.

Always follow safety guidelines and precautions mentioned in the user manual while operating the S1134 Series Multi-channel Signal Generator.

Key Features

- Frequency range: 10MHz to 40GHz
- 2-8 RF output channels which can operate individually Maximum output power: ≥+15dBm
- Phase noise: <-116dBc/Hz (10GHz, 10kHz offset)
- Phase coherent among every channel
- Channel to channel relative phase drift (10GHz, 24h) ≤±1°
- High-speed frequency switching <10us
- Narrow pulse modulation, minimum pulse width 50ns
- Rise/fall time 10ns


Overview

Saluki S1134 series signal generator is a phase-coherent and low phase noise signal generator with 2-8 channels. Every channel can be independently fully adjusted. S1134 series can cover frequency range from 10MHz to 40GHz with frequency resolution as low as 0.01 Hz.

The instrument comes in a standard 2U/3U rack-mount form and offers LAN control interface, which allows easy and fast communication. Remote control of the instrument can be quickly attained from any host system. Application programming interface (API) or programming examples make the control implementation very easy. **Applications**: Local Oscillator Replacement / Component Test / Receiver Sensitivity Test / R&D low noise microwave generator

Technical Specifications

Model	S1134 Series	
Output		
Frequency Range	10MHz – 20/40GHz (each channel can be different) *For other frequency range, contact us for customization*	
Output Channel	2-8 channels	
Frequency Resolution	0.01Hz	
Maximum Output Power	10MHz to 20GHz: +15dBm 20GHz to 40GHz: +13dBm	
Minimum Output Power	-110dBm	
Power Resolution	0.01dB	
Switching Speed	≤20ms	
Power Level Uncertainty Harmonic Spurious	≤±1.3dB @>-20dBm <±1.5dB @-20 to -70dBm <±3dB @≤ -70dBm ≤-50dBc @10dBm output	
Non-harmonic Spurious	10MHz – 12GHz: ≤-70dBc 12GHz – 20GHz: ≤-65dBc 20GHz – 40GHz: ≤-60dBc	
Channel to Channel Isolation	≥80dB	
Pulse Modulation	Minimum pulse width 50ns	
SSB Phase Noise (@10GHz)	≤-86dBc/Hz@100Hz ≤-108dBc/Hz@1KHz ≤-116dBc/Hz@10KHz ≤-116dBc/Hz@100KHz ≤-120dBc/Hz@1MHz	
COD I HASC HOISE (@ TOOH Z)	≤-140dBc/Hz@10MHz	

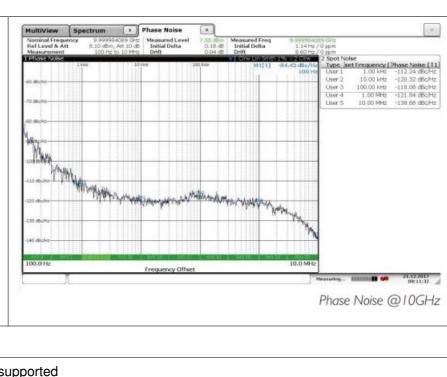

SSB Phase Noise (@10GHz)

Frequency Reference

both external and internal reference supported		
Internal Reference Frequency Tempe rature Stability	±5e-8, 0°C to+50°C	
Internal Reference Frequency	10MHz	
Internal Reference Output Power	≥ 5dBm	
External Reference Input		
Level Range	5dBm – 10dBm	
	≤-125dBc/Hz@10Hz	
	≤-140dBc/Hz@100Hz	
	≤-150dBc/Hz@1KHz	
	≤-155dBc/Hz@10KHz	
SSB of Internal Reference	≤-155dBc/Hz@100KHz	
General Information		
LAN Control	RJ-45 (TCP/IP over Ethernet)	

LAN Control	RJ-45 (TCP/IP over Ethernet)

Operation Temperature	0°C to +50°C
Operation Humidity	20%-80% (+30°C)
Power Supply	AC 176-264VAC, 45Hz-65Hz
	483 (W) × 89 (H) × 559 (D) mm (2U)
Dimension	483 (W) × 134 (H) × 559 (D) mm (3U)
Weight	≤20kg

Ordering Information

The output frequency of each channel can be configured flexibly.

Module No.	Item
S1134D	2-channel output, frequency range: 10MHz-20GHz/40GHz
S1134T	3-channel output, frequency range: 10MHz-20GHz/40GHz
S1134Q	4-channel output, frequency range: 10MHz-20GHz/40GHz
S1134F	5-channel output, frequency range: 10MHz-20GHz/40GHz
S1134S	6-channel output, frequency range: 10MHz-20GHz/40GHz
S1134H	7-channel output, frequency range: 10MHz-20GHz/40GHz
S1134O	8-channel output, frequency range: 10MHz-20GHz/40GHz

Example:

S1134T-224: 3CH output, 2 channels are 10MHz-20GHz, 1 channel is 10MHz-40GHz. S1134Q-2222: 4CH output, all channels are 10MHz-20GHz.

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice

S1134 Series Multi-channel Signal Generator (Frequency Range: 10MHz – 40GHz, 2-8 channels)

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886.909 602 109 sales@salukitec.com www.salukitec.com

Documents / Resources



SALUKI TECHNOLOGY S1134 Series Multi-Channel Signal Generator [pdf] Owner's Manua

S1134 Series Multi-Channel Signal Generator, S1134 Series, Multi-Channel Signal Generator, Signal Generator, Generator

References

• ** Saluki | Signal Analyzer | Signal Generator | Network Analyzer | SSPA | Calibration Kit | Electronic

Design - SALUKI

Manuals+,