



Schneider Electric MTN644992 SpaceLogic KNX Binary Input Instruction Manual

[Home](#) » [Schneider Electric](#) » Schneider Electric MTN644992 SpaceLogic KNX Binary Input Instruction Manual

Contents [[hide](#)]

- [1 Schneider Electric MTN644992 SpaceLogic KNX Binary Input For your safety](#)
- [2 Binary input introduction](#)
- [3 Operating and display elements](#)
- [4 Installing the binary input](#)
- [5 Putting the binary input into the operation](#)
- [6 Technical data](#)
- [7 Schneider Electric -Contact](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)



Schneider Electric MTN644992 SpaceLogic KNX Binary Input



For your safety

Danger

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

Safe electrical installation must be carried out only by skilled professionals. Skilled professionals must prove profound knowledge in the following areas:

- Connecting to installation networks
- Connecting several electrical devices
- Laying electric cables
- Connecting and establishing KNX networks
- Safety standards, local wiring rules and regulations

Failure to follow these instructions will result in death or serious injury.

Caution

The device may be damaged!

- The internal device connection of the potentials is not suitable for carrying load currents.
- Only operate the device according to the specifications stated in the Technical data.
- All the devices that are installed next to the binary input must be equipped with basic insulation at the very least.

Failure to follow these instructions can result in equipment damage.


Binary input introduction

The binary input REG-K/4×230 is used to connect four conventional 230 V devices (such as movement detectors and light-sensitive switches) to the KNX bus.

The binary input has a bus coupler. It is installed on a DIN rail acc. to EN 60715, with the bus connection made

via a bus connecting terminal. A data rail is not required.


Operating and display elements

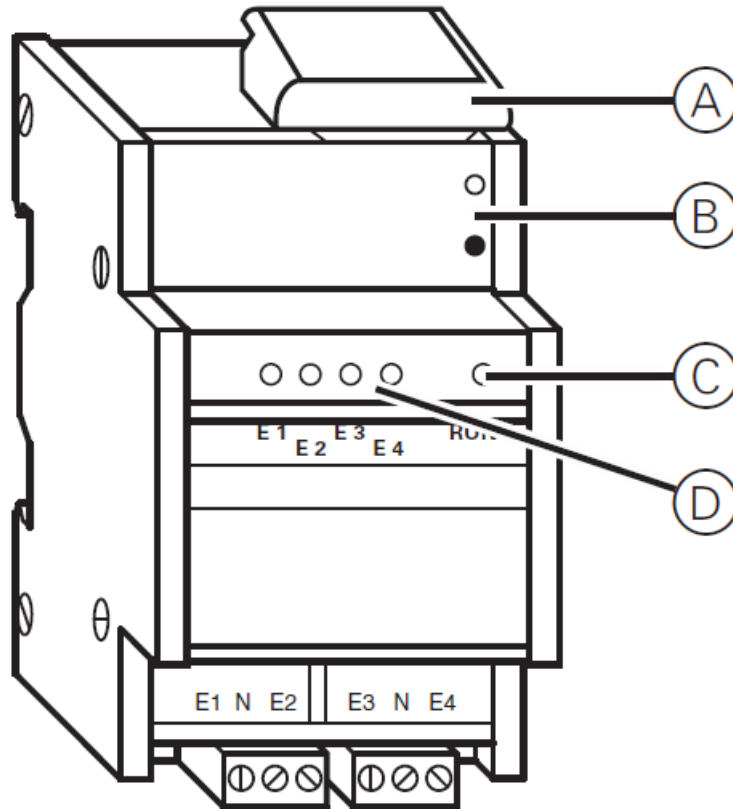


- A** Cover of the bus connecting terminal
- B** Programming button and programming LED (behind hinged cover)
- C** Operational LED
- D** Channel status LEDs

Installing the binary input

1. Set the binary input onto the DIN rail.

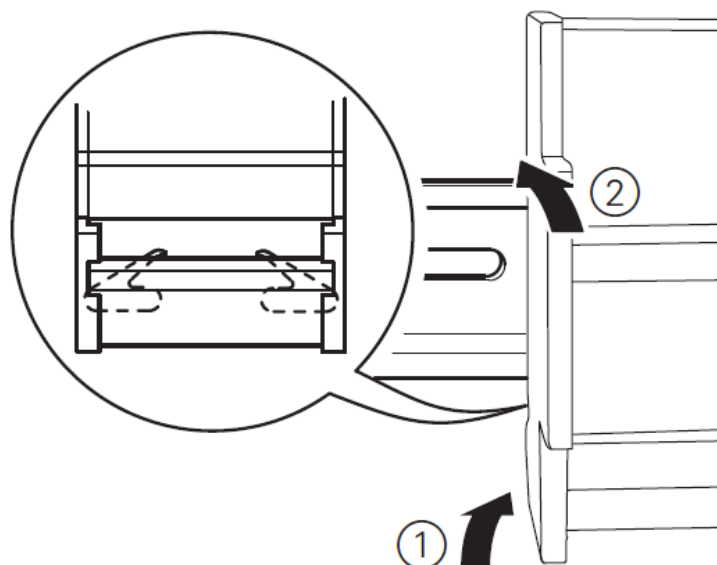


2. Connect KNX.

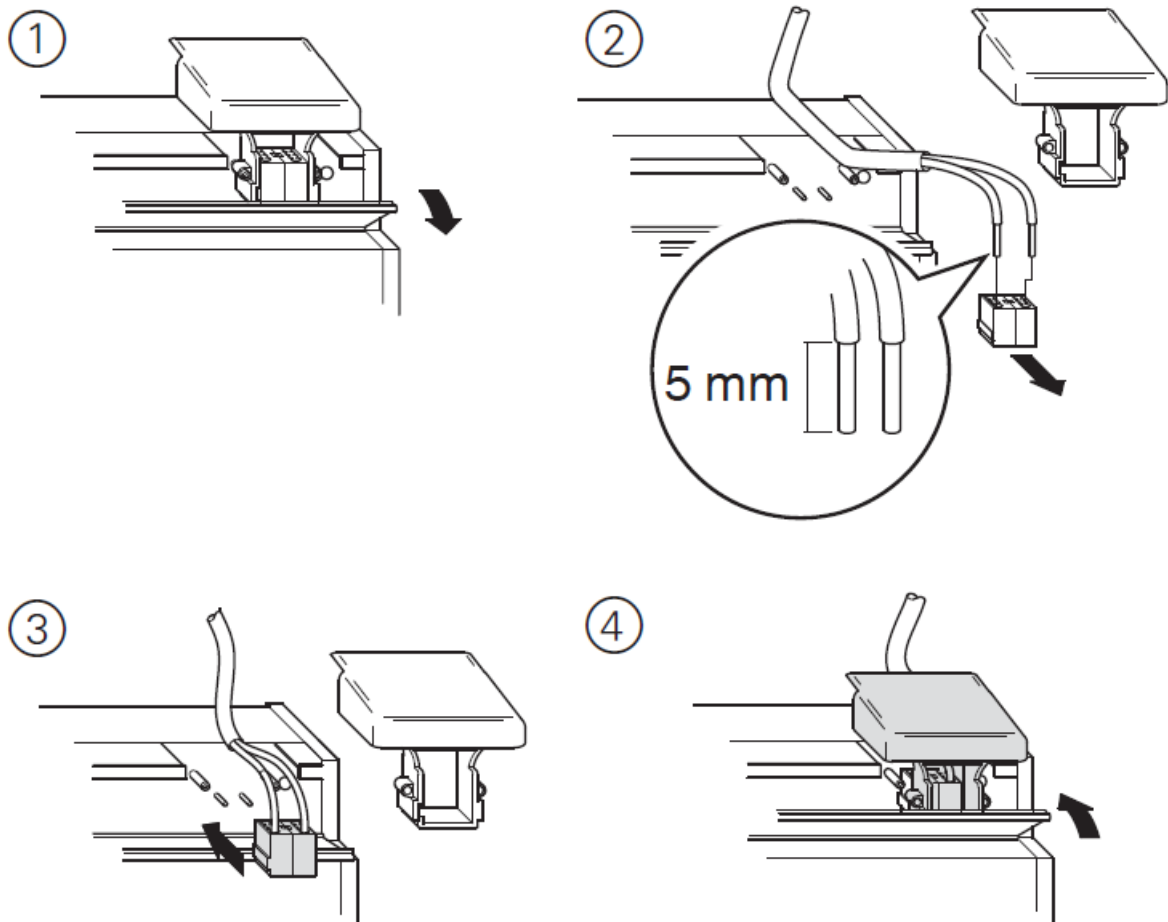

WARNING

Risk of fatal injury from electrical current. The device could be damaged.

Safety clearance must be guaranteed in accordance with IEC 60664-1. There must be at least 4 mm between the individual cores of the 230 V supply cable and the KNX line.

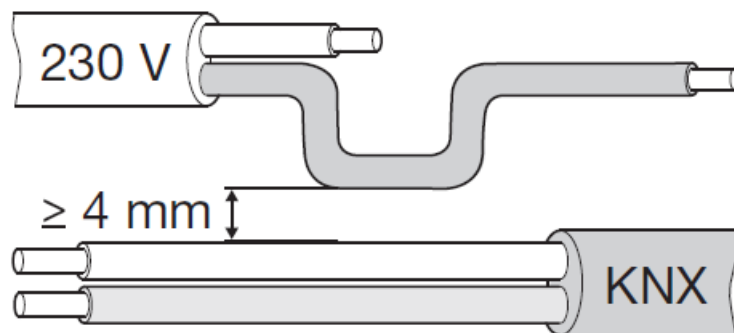


CAUTION

The device could be damaged.

High voltages can cause damage. Never connect devices with more than 230 V.

Connect the input cables.

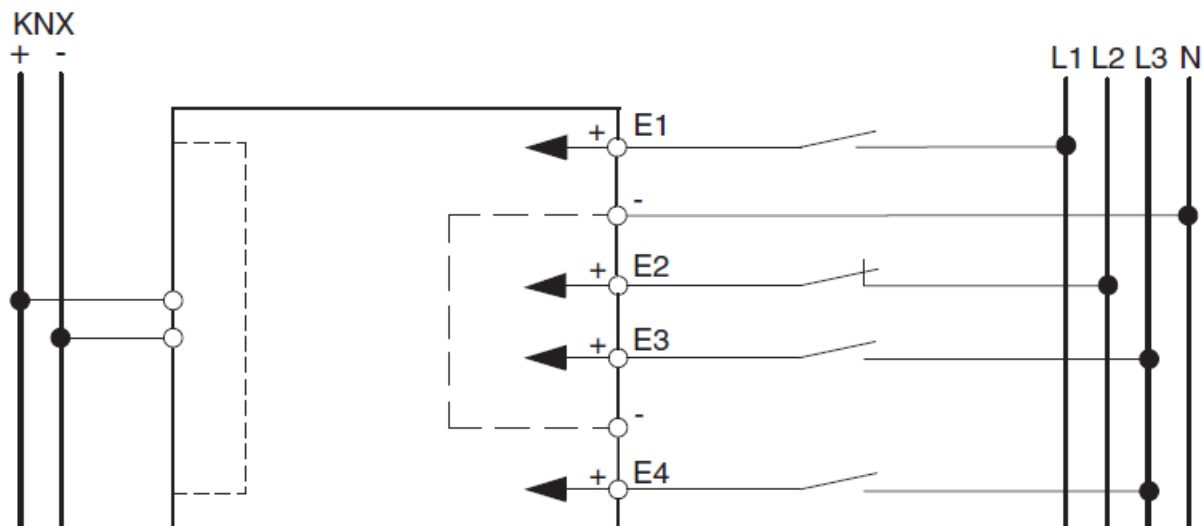

When the bus voltage is connected and there is a signal at the input, the corresponding yellow channel status LED will light up.

Note: The N conductors must be connected to the device. Inputs E1 to E4 have a common potential ($4 \times N$). Inputs E1 to E4 can be assigned to each other with different phases.

Putting the binary input into the operation

1. Press the programming button.

The programming LED lights up.

2. Load the physical address and the application into the device from the ETS.

The operating LED lights up: The application was loaded successfully, and the device is ready for operation.

Technical data

- **Supply from KNX:** DC 24 V / max.18 mA
- **Insulation voltage:** AC 4 kV bus/inputs

Inputs

- **Nominal voltage:** AC 230 V $\pm 10\%$, 50/60 Hz
- **0 signal:** < 40 V
- **1 signal:** > 160 V
- **Nominal current:** AC approx. 7 mA

Permitted cable

- **length:** max. 100 m/channel

Ambient temperature

- **Operation:** -5 °C to +45 °C

- **Storage:** -25 °C to +55 °C
- **Transport:** -25 °C to +70 °C
- **Max. humidity:** 93 % relative humidity, no moisture condensation
- **Environment:** The device is designed for use at a height of up to 2000 m above sea level (MSL).

Connections

- **Inputs, outputs:** Screw terminals
- **Single-core:** 1.5 mm² to 2.5 mm²

Finely stranded

- **(with core end sleeve):** 1.5 mm² to 2.5 mm²
- **KNX:** Bus connecting terminal

Dimensions

- **Height** x width x
- **depth:** 90 x 45 x 65 mm
- **Device width:** 2.5 modules

Schneider Electric -Contact

Schneider Electric Industries SAS

35 rue Joseph Monier Rueil Malmaison 92500 France


If you have technical questions, please contact the Customer Care Centre in your country.

se.com/contact

UK Representative

Schneider Electric Limited Stafford Park 5 Telford, TF3 3 BL, UK

Documents / Resources



[Schneider Electric MTN644992 SpaceLogic KNX Binary Input](#) [pdf] Instruction Manual
MTN644992, SpaceLogic KNX Binary Input, MTN644992 SpaceLogic KNX Binary Input, KNX
Binary Input, Binary Input