

**SEALEY**  
SEALEY BB2002 Bench  
Mounting Buffer  
Polisher



# SEALEY BB2002 Bench Mounting Buffer Polisher Instruction Manual

[Home](#) » [SEALEY](#) » SEALEY BB2002 Bench Mounting Buffer Polisher Instruction Manual 

## Contents

- [1 SEALEY BB2002 Bench Mounting Buffer Polisher](#)
- [2 Product Usage Instructions](#)
- [3 SAFETY](#)
- [4 INTRODUCTION](#)
- [5 SPECIFICATION](#)
- [6 INSTALLATION](#)
- [7 OPERATION](#)
- [8 MAINTENANCE](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)



**SEALEY BB2002 Bench Mounting Buffer Polisher**



## Specifications

- Model No: BB1502 & BB2002
- Size: 150mm (370W/230V) & 200mm (550W/230V)

## Product Usage Instructions

### Safety

#### Electrical Safety

#### It is crucial to follow these electrical safety guidelines

- Regularly inspect power supply cables, plugs, and connections for wear or damage.
- Ensure the insulation on all cables and the appliance is safe before connecting to the power supply.
- Use an RCD with all electrical products for added safety.
- Do not pull or carry the appliance by the power cable.

#### General Safety

#### General safety precautions to be followed

- Disconnect the polisher from the main power before changing accessories or performing maintenance.
- Replace damaged parts with genuine parts only.
- Wear approved safety goggles, dust mask, and safety gloves during operation.

#### FAQ:

##### **Q: What should I do if the cable or plug is damaged during use?**

**A:** Switch off the electricity supply, remove from use, and have repairs carried out by a qualified electrician. Replace a damaged plug with a BS1363/A 13 Amp 3 pin plug.

BENCH MOUNTING BUFFER/POLISHER 150MM 370W/230V & 200MM 550W/230V  
MODEL NO: BB1502 & BB2002

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL

INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to  
instructions



Wear eye  
protection



Wear protective  
gloves



Wear a mask

## SAFETY

### 1. Electrical Safety

- **WARNING!** It is the user's responsibility to check the following: Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Sealey recommend that an RCD (Residual Current Device) is used with all electrical products. You may obtain an RCD by contacting your local Sealey stockist. If the product is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.


Electrical Safety Information: it is important that the following information is read and understood.

1. Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
2. Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
3. **IMPORTANT:** Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse – see fuse rating in these instructions.
  - DO NOT pull or carry the appliance by the power cable.
  - DO NOT pull the plug from the socket by the cable.
  - DO NOT use worn or damaged cables, plugs or connectors. Ensure that any faulty item is repaired or replaced immediately by a qualified electrician.
4. This product is fitted with a BS1363/A 13 Amp 3 pin plug.

If the cable or plug is damaged during use, switch the electricity supply and remove from use.  
Ensure that repairs are carried out by a qualified electrician.

Replace a damaged plug with a BS1363/A 13 Amp 3 pin plug. If in doubt contact a qualified electrician.

- Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
- Connect the BROWN live wire to the live terminal 'L'.
- Connect the BLUE neutral wire to the neutral terminal 'N'.
- Ensure that the cable outer sheath extends inside the cable restraint and that the restraint is tight.
- Sealey recommend that repairs are carried out by a qualified electrician.

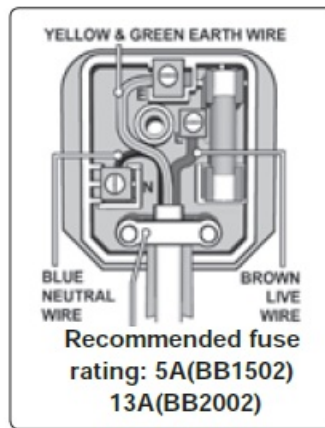

## GENERAL SAFETY


- Disconnect the polisher from the mains power before changing accessories, servicing or performing any maintenance.
- Replace damaged parts. Use genuine parts only. Unapproved parts may be dangerous and will invalidate the warranty.
- Wear approved safety goggles, appropriate dust mask if polisher generates dust and safety gloves.
- Remove ill fitting clothing. Remove ties, watches, rings, and other loose jewellery, and contain long hair.
- Use the polisher in a suitable work area, keep area clean, tidy and free from unrelated materials, and ensure adequate lighting.
- Maintain correct balance and footing. DO NOT over-reach and ensure the floor is not slippery. Wear non slip shoes.
- Polishing wheels must be securely attached before use, but not over tightened.
- Keep non essential persons away from the working area, use screens if necessary.
- DO NOT operate the polisher if any parts are missing or if the polisher is damaged.
- DO NOT use the polisher for a task it was not designed to perform.
- DO NOT get the polisher wet or use in damp or wet locations.
- DO NOT switch the polisher on whilst the wheel is in contact with the workpiece.
- Avoid polishing dissimilar metals with the same buffing wheel; galvanic corrosion may occur.
- DO NOT touch the workpiece immediately after polishing as it may be very hot.
- DO NOT hold unsecured work in your bare hands, and DO NOT touch the buffing wheel whilst operating, or whilst plugged into the mains power.
- DO NOT leave the polisher running unattended.
- DO NOT operate the polisher when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- When not in use, switch the polisher off and remove the plug from the power supply.

## INTRODUCTION

Designed for quick and easy smoothing/polishing of metal and other materials. Efficient 550W motor provides sufficient power for most tasks while the cast iron base reduces vibration. Supplied with fine and coarse buffing/polishing wheels and fitted ASTA approved plug.

## SPECIFICATION

- Model No: . BB1502 . BB2002
- Motor Power: . 370W . 550W
- Supply: . 230V . 230V
- No Load Speed: . 2850rpm . 2850rpm
- Spindle Size: . . . . . 13mm . 16mm
- Buffing/Polishing Wheel: . Ø150x10xØ13mm . Ø200x14xØ16mm
- Buffing Wheel – Fine: . . . . . BG150BW . BG200BW
- Buffing Wheel – Coarse: . BG150BWC . BG200BWC
- Nett Weight: . 9kg . . . . . 10kg

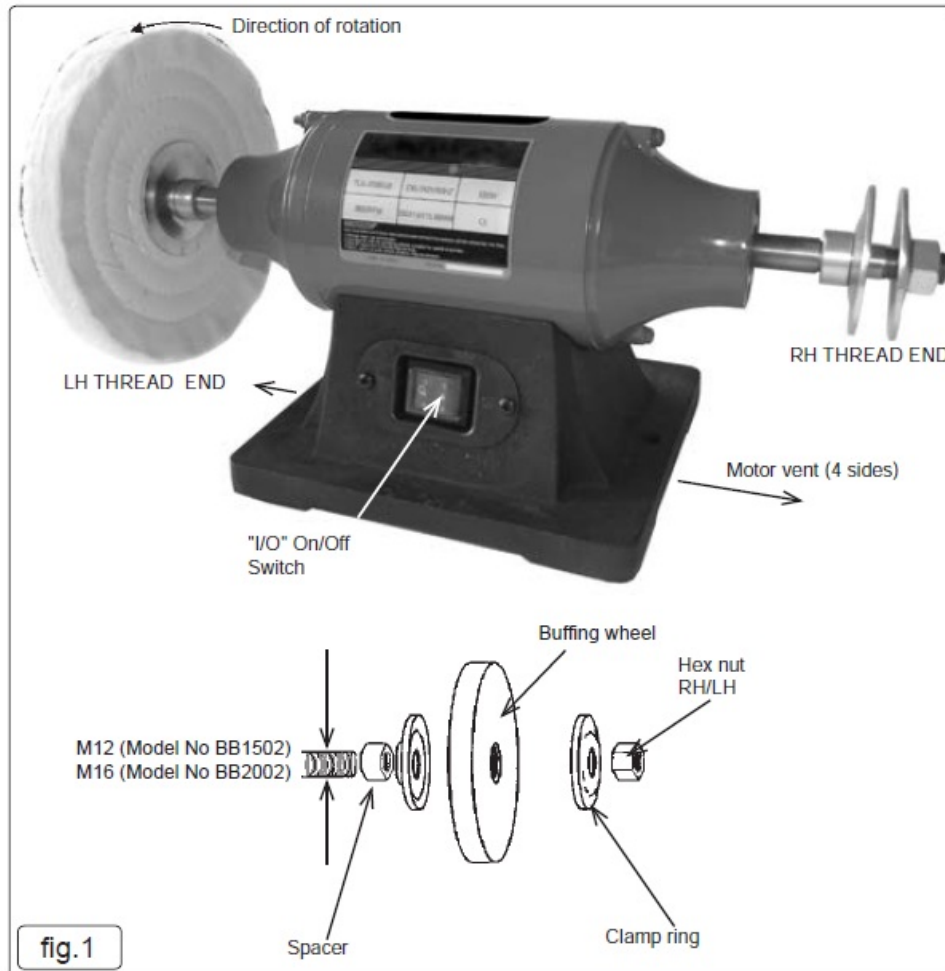


## INSTALLATION

1. Bolt the polisher securely to a workbench using the base securing holes as a template. Check that all assembly nuts and bolts are secure before powering. DO NOT block the 4 motor ventilation paths through the base.
2. Wheel Fitting (fig.1)
  1. Place the spacer over the axle shoulder.
  2. Sandwich the selected buffing wheel between the clamp rings and secure with the hexagon nut, hand tight. (The axle threaded ends are handed LH and RH).
  3. Tighten the nuts enough to grip without crushing the buffing wheel. Wheel rotation, in use, will tighten the hexagon nut.

## OPERATION

- **WARNING!** Before commencing work, ensure you have read, understood, and apply the chapter 1. Safety Instructions.

1. Plug the polisher into the mains power supply.
2. Switch the polisher on and bring the workpiece slowly into contact with the wheel. The safest and best position for contact with the wheel is between “7-0-clock” and the “8-0-clock” positions in (fig.2). DO NOT contact the wheel outside the quadrant “6-0-clock” and “9-0-clock” positions.
3. When completed, unplug the polisher from the mains power supply, and clean the machine ready for next use.

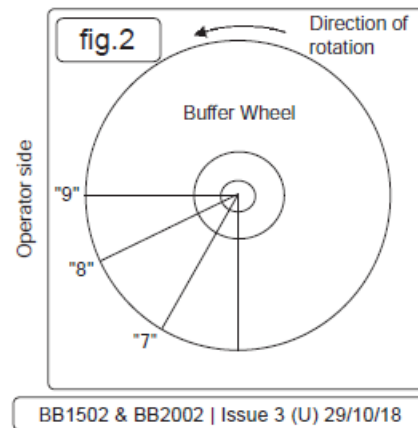

## MAINTENANCE

**WARNING!** Ensure the grinder is unplugged from the mains power supply before performing any maintenance or service.

1. As the grinding wheels wear, adjust the positions of the tool rests. Each rest must be set not more than 2mm from the grinding surface.
2. Regularly remove the grinding wheel covers and clean out any dust and dirt.
3. The machine motor and bearings are sealed units and require no regular maintenance. Should you require assistance, contact your local service agent.



### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



### WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.


Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications

and component parts without prior notice. Important: No Liability is accepted for incorrect use of this product.  
Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.\

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR

01284 757500 01284 703534 [sales@sealey.co.uk](mailto:sales@sealey.co.uk) [www.sealey.co.uk](http://www.sealey.co.uk)

## Documents / Resources

	<p><a href="#">SEALEY BB2002 Bench Mounting Buffer Polisher</a> [pdf] Instruction Manual BB2002, BB2002 Bench Mounting Buffer Polisher, BB2002, Bench Mounting Buffer Polisher, M ounting Buffer Polisher, Buffer Polisher, Polisher</p>
---	--

## References

- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.