



SECURI Wireless Door Open Chime Kit User Manual

[Home](#) » [secrui](#) » SECURI Wireless Door Open Chime Kit User Manual 

Contents

- [1 SECURI Wireless Door Open Chime Kit](#)
- [2 Product overview](#)
- [3 Product Introduction](#)
- [4 Package List](#)
- [5 Features](#)
- [6 Operating Instructions](#)
- [7 ON](#)
- [8 Door Sensor & Magnetic Strip Matching](#)
- [9 Selecting the Ringtone](#)
- [10 Setting the Volume](#)
- [11 Receiver and Door Sensor Pairing](#)
- [12 Installation for magnetic door sensor](#)
- [13 Specifications of Receiver](#)
- [14 Specifications of Transmitter Button](#)
- [15 Specifications of Door sensor](#)
- [16 Documents / Resources](#)
- [17 Related Posts](#)




SECURITY
COMPANY SLOGAN

SECRUI Wireless Door Open Chime Kit



Product overview

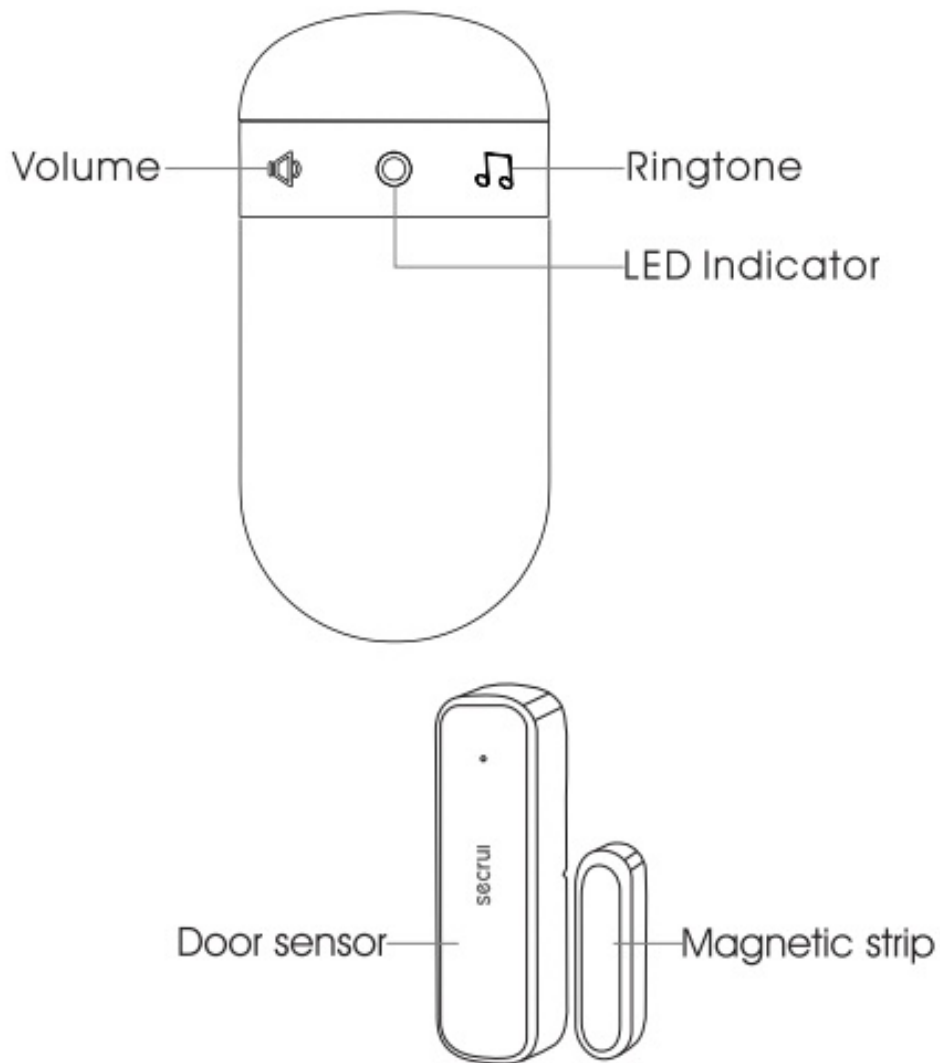

Product Introduction

It's a Wireless Door Open Chime kit. When the two parts of the door sensor are separated more than 0.4 inch, door sensor will be triggered, then you will hear the ringtone from the receiver. which can help deter break-ins, keep your children and pet safe, and never miss a customer when they come. It is ideal door alarms for home, office, store, warehouse, garages, and more!



Package List

- Secrui Doorbell Receiver(s),
- Secrui Magnetic Door Sensor(s),
- Guide

Features

- 58 tones optional
- Colorful LED indicator
- 5 volume levels adjustable (mute mode with light only)
- Memory function: Keep the previous setted tune after re-plugging it

Operating Instructions

Button Press




Short press < 3s




Long press > 3s

ON

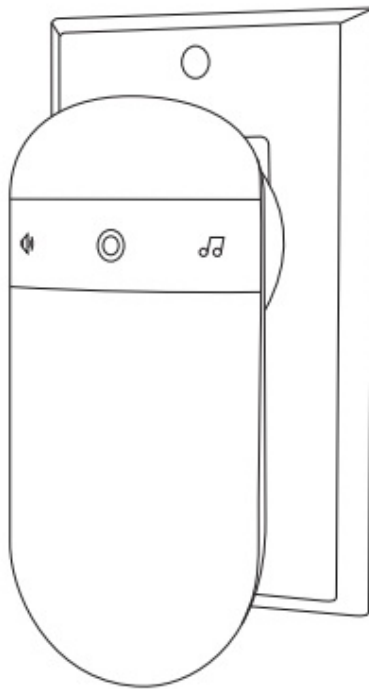




100-240V, 50-60Hz AC outlet

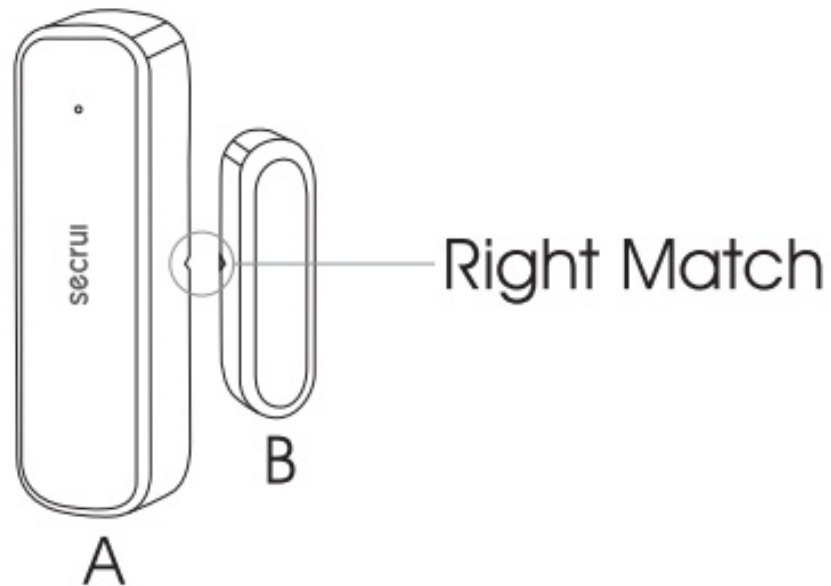Door Sensor & Magnetic Strip Matching




Selecting the Ringtone

- Short press Cycle FORWARD through the tones
- Long press  hear a short beep sound  Cycle REVERSE through the tones

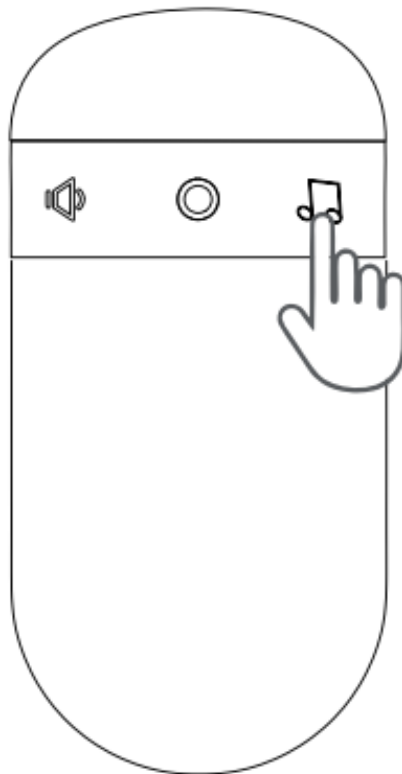

Setting the Volume

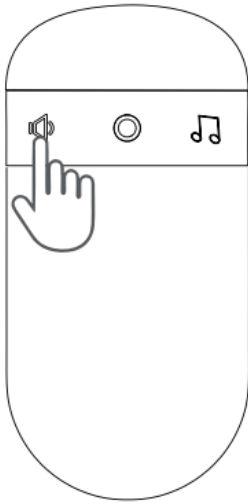


Short press, 1~5 volume setting

Note: The volume changes to the largest automatically every time after the receiver is powered on.


Receiver and Door Sensor Pairing

1. Long press, receiver beeps once

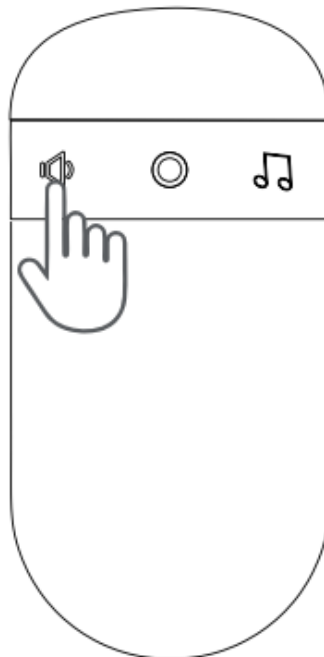


2. Move B Receiver beeps twice Get the two parts together
3. B again Receiver beeps once Get the two parts together

Turns red

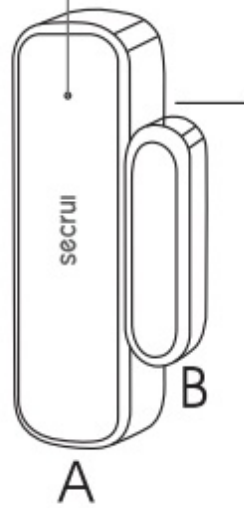


4. Short press

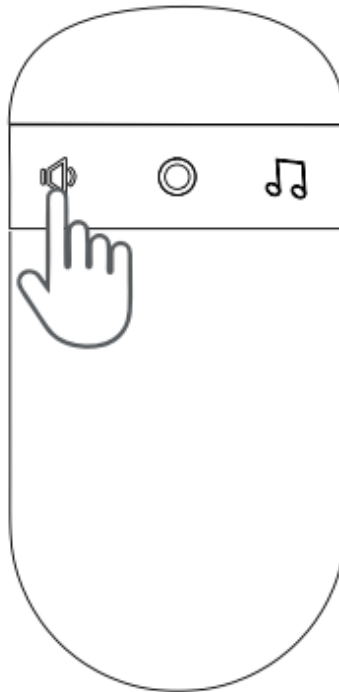

5. Move B Music is ringing, adding successfully.

Turns red

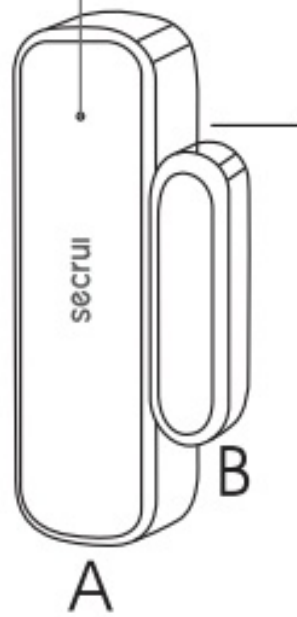


(Adding the second door sensor or more please according to the above steps)


Fixed-tone:

Adding a door sensor with a FIXED receiver ringtone

1. Short press select the favorite tone

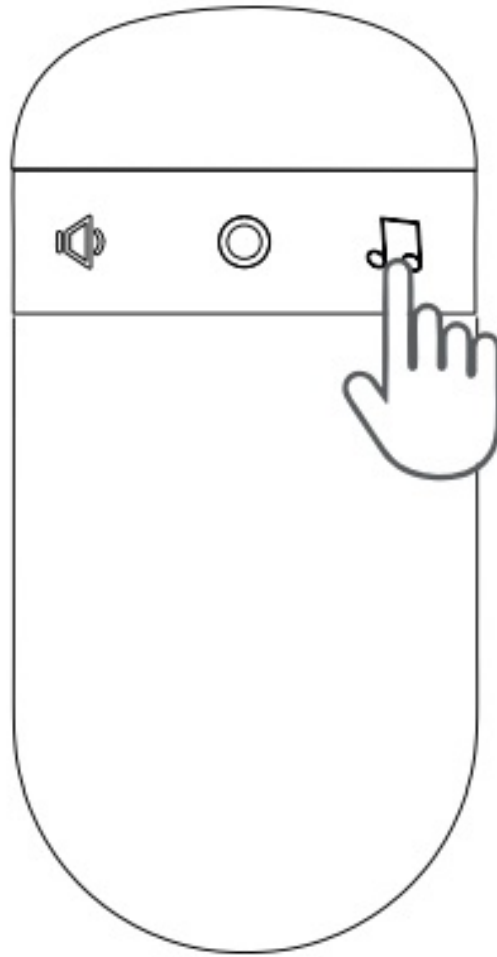


2. Long press simultaneously Receiver beeps once

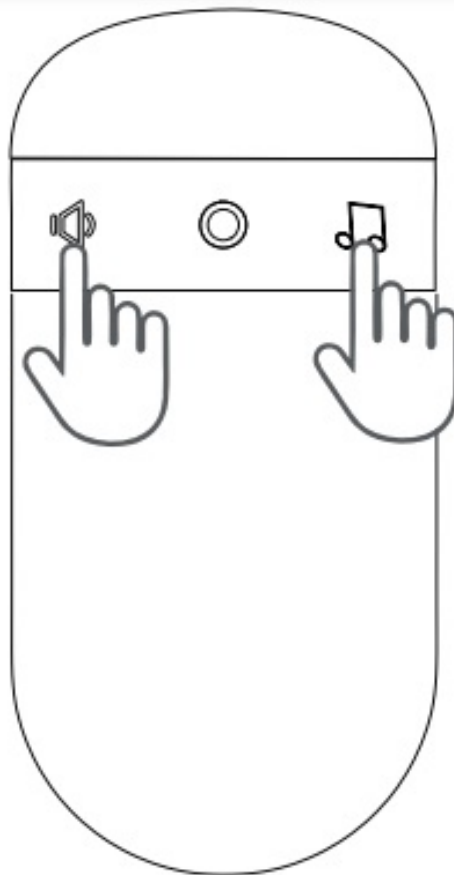


3. Move B Receiver beeps 1wice Get the 1wo parts together

4. Move B again Receiver beeps once Get the 1wo parts together


Turns red

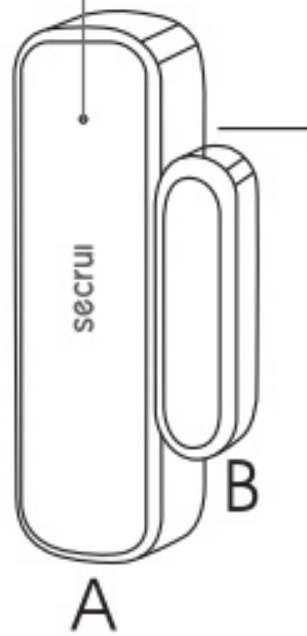

5. Short press

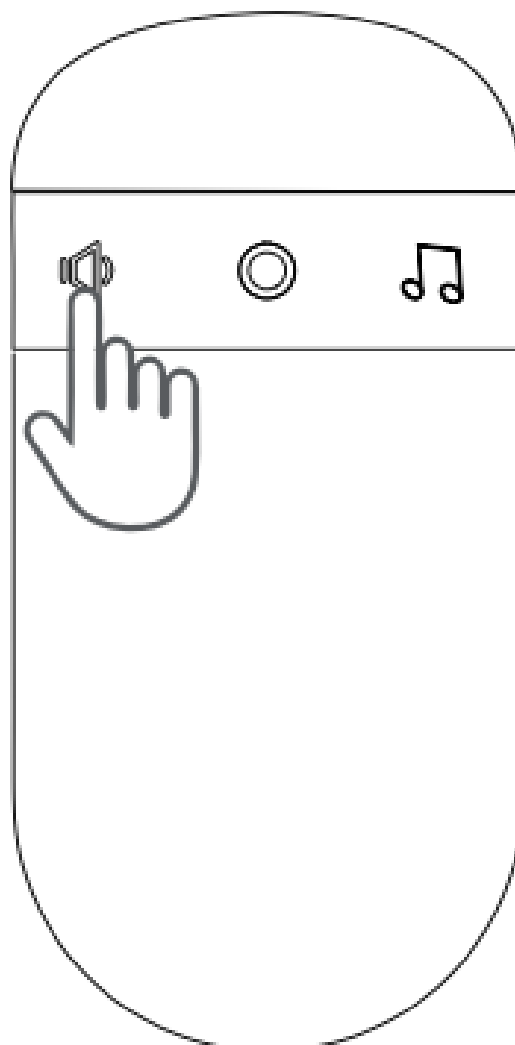

6. MoveB Music is ringing, adding successfully.

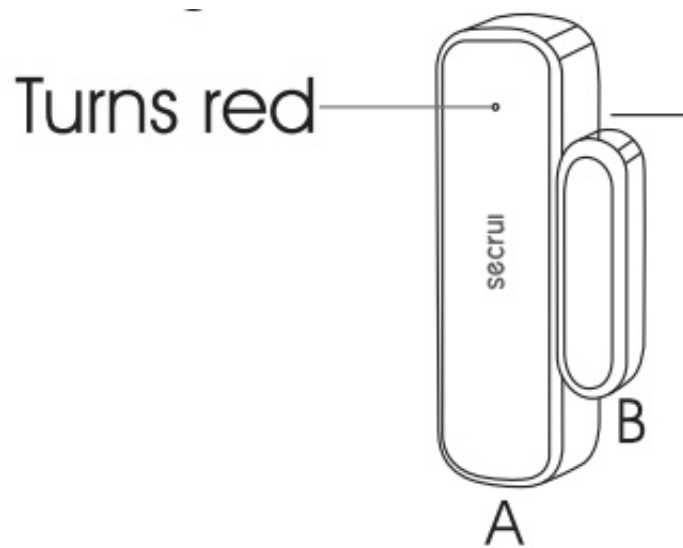


(Adding the second door sensor or more with a FIXED receiver ringtone please according to the above steps)

Note:


When in adding state, short press any keys on the receiver or leaves it 20s without any operation, the receiver will automatically quit the adding state.



Installation for magnetic door sensor

Clean

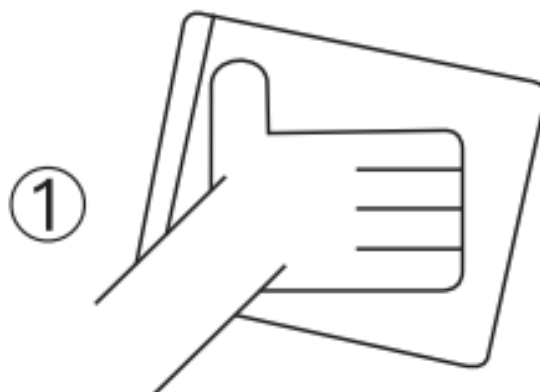


Remove the insulating strip

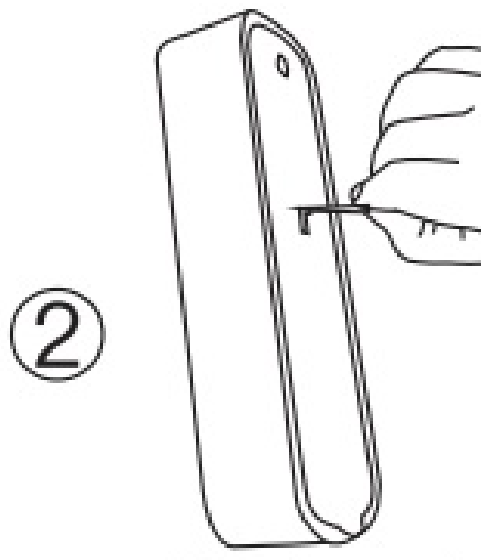

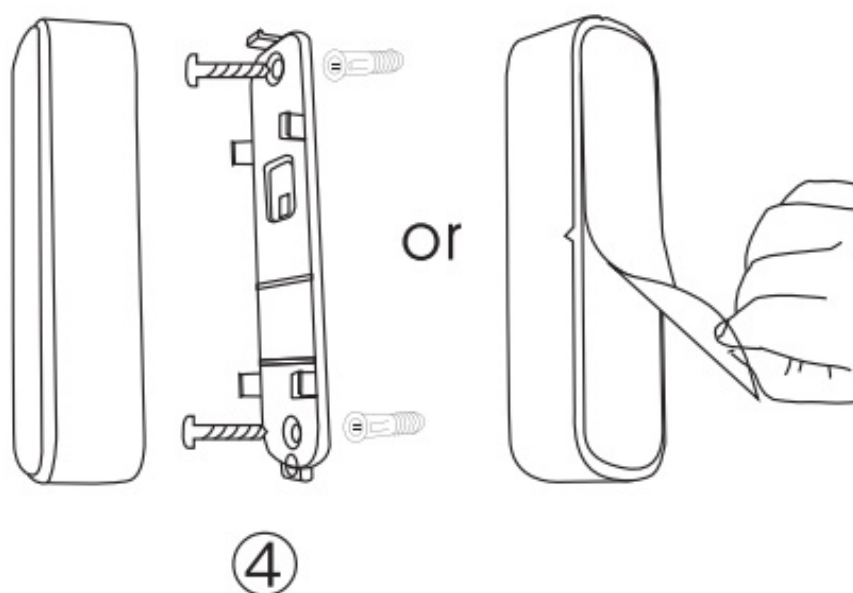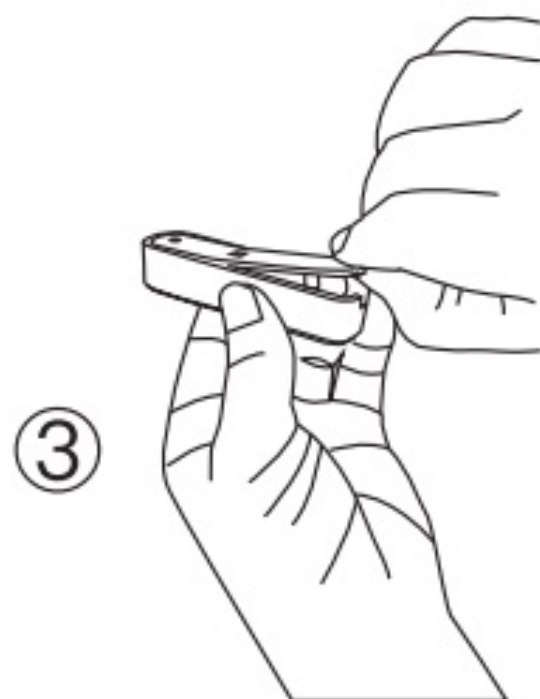



magnetic strip

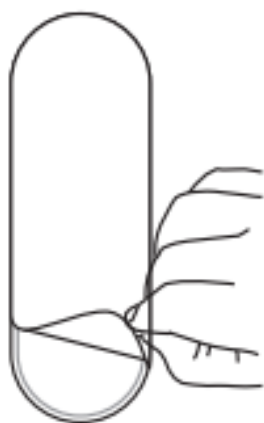


⑤

Clear All Settings – Unpair all door sensors from receiver

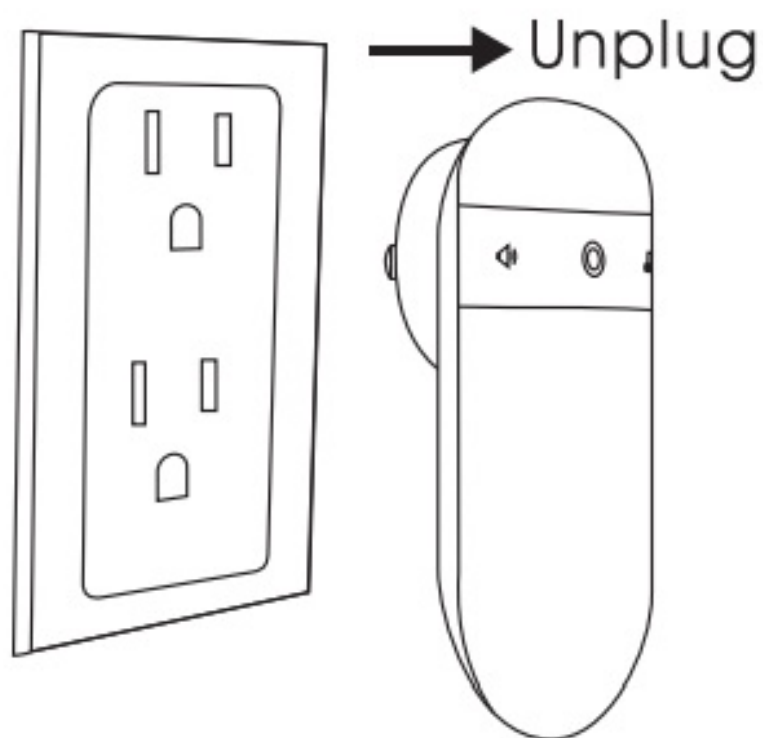

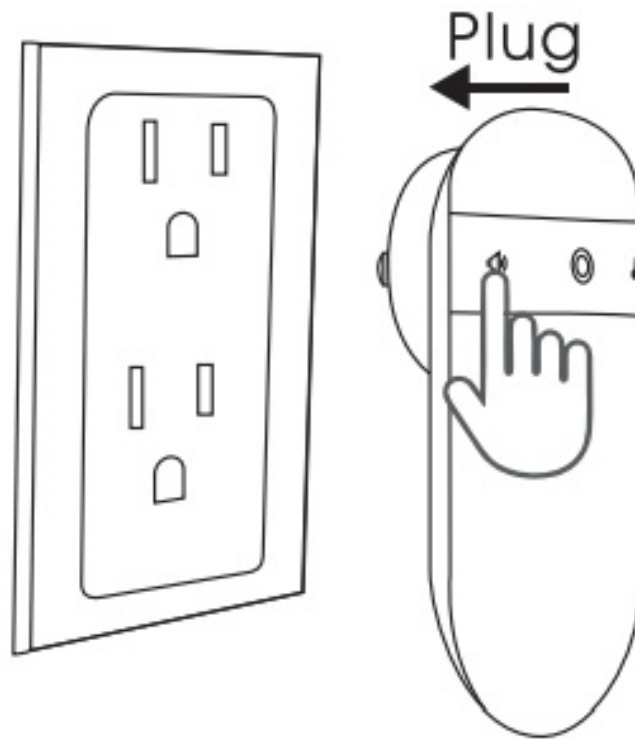

Press and hold (don't release it), plug in the receiver,

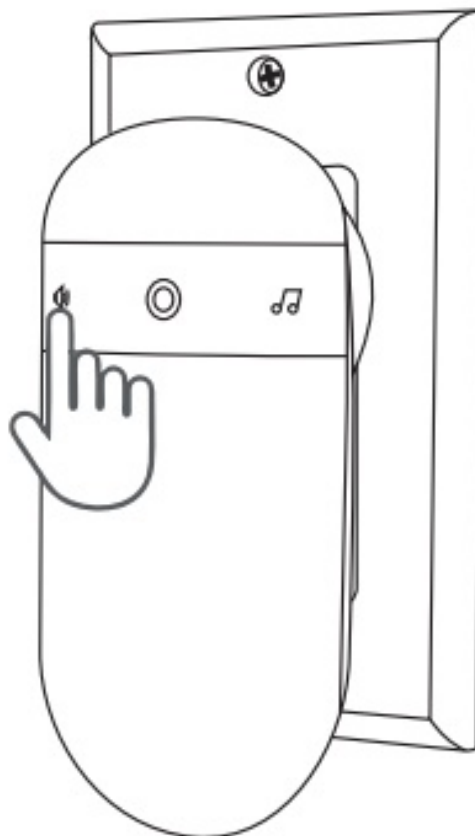

Press and hold, continuous 10 beeps and the LED indicator flashes 10 times. then gives a series of fast beeps.

Specifications of Receiver

Working voltage: 100-240V, 50-60Hz AC Standby current: < 3mA

Working current: < 11 mA

Radiofrequency: 433MHz

Operation range: 400 feet [in open area)

Specifications of Transmitter Button

Ip55 waterproof

Working Temperature: -4 °F – | 22°F

Working Humidity: 5 85%

Specifications of Door sensor

Non-waterproof

Working Range: 400 ft (in open area)

Working current: 3uA(standby), | 5mA(Transmitting)

Installation gap: 5 0.4inch

Working Temperature: -4 °F – | 22°F

Working Humidity: ,; 85%

Supplier's Declaration of Conformity

47 CFR § 2.1077 Compliance Information

The following equipment:

* Product		Doorbell
* Model (s)	:	M508
* Brand Name		SECRUI
* Manufacturer's Name		SHENZHEN KERUI SMART TECHNOLOGY CO., LTD
* Manufacturer's Address :		Room 1501, T2, Jinlitong Building, No. 1100, Xingye Road, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
* Test Report Number	:	TB-FCC183394

is herewith confirmed to comply with the requirements of FCC Part 15 Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.
3. The result of electromagnetic emission has been evaluated by Shenzhen TOBY Technology Co.,

Ltd. (www.tobylab.cn) laboratory

(FCC Accredited Test Firm Registration Number: 854351) and showed in the test report.

It is understood that each unit marketed is identical to the device as tested, and any changes to the device which could adversely affect the emission characteristics will require retest.

4. The following importer/manufacturer (Located in the United States) is responsible for this declaration:

Company Name	SEA&MEW CONSULTING INC
Company Address	1007 NORANGE ST, 4TH FLOOR, #96
Telephone	+(001)3134133043
Name (Full name)	Position
Person is responsible for making this declaration:	

(Place)		(Date)	(Company Stamp and Legal Signature)

Email :contact@secrui.com

Documents / Resources

 <p>Wireless Door Open Chime kit User Manual</p>	<p>SECURI Wireless Door Open Chime Kit [pdf] User Manual</p> <p>Wireless Door Open Chime Kit, Door Open Chime Kit, Wireless Open Chime Kit, Open Chime Kit, Chime Kit</p>
---	---