



[Home](#) » [SeenDa](#) » **SEENDA COE300 Multi Device Wireless Bluetooth Keyboard and Mouse Set**
User Manual 

Contents [[hide](#)]


- [1 SEENDA COE300 Multi Device Wireless Bluetooth Keyboard and Mouse Set](#)
- [2 Product Features](#)
- [3 2.4G USB Connection](#)
- [4 Keyboard Bluetooth Connection](#)
- [5 How to Switch Mouse Device Channel](#)
- [6 Multimedia Function Keys](#)
- [7 Product Specifications](#)
- [8 Package Content](#)
- [9 Safety Warning](#)
- [10 EU Declaration of Conformity](#)
- [11 Product Warranty](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)


SEENDA

SEENDA COE300 Multi Device Wireless Bluetooth Keyboard and Mouse Set



Product Features

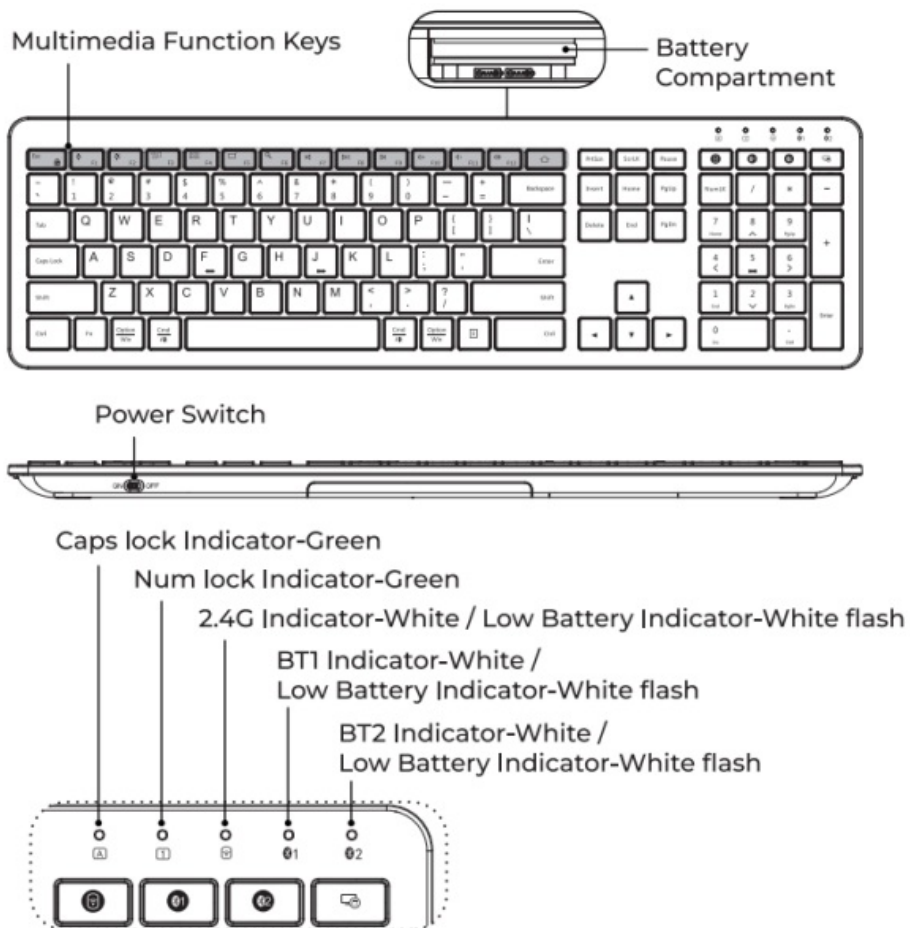


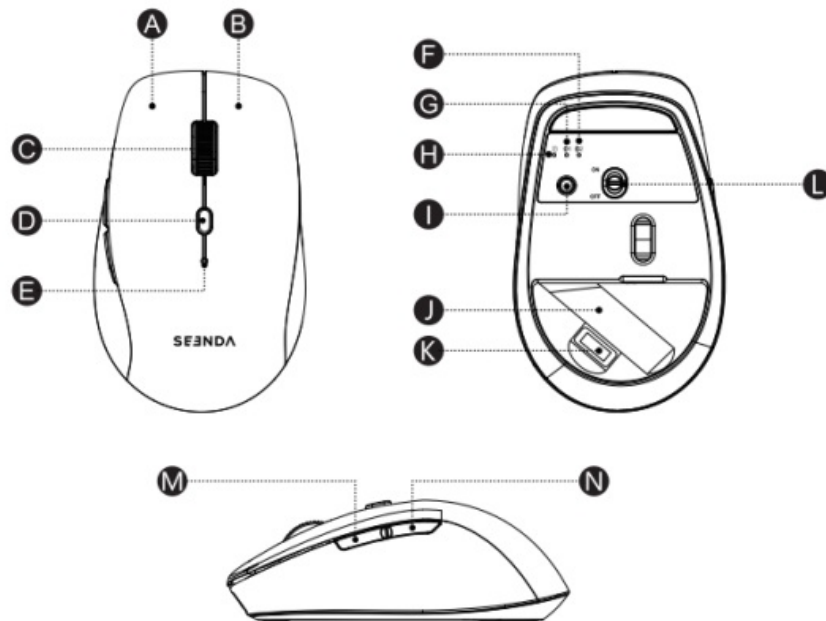


- A Left Button
- B Right Button
- C Scroll Wheel
- D DPI Button
- E 2.4G USB Indicator / DPI Indicator
- F Bluetooth 2 Indicator / DPI Indicator
- G Bluetooth 1 Indicator / DPI Indicator
- H Channel Switch Button
- I Battery Slot
- J Power Switch
- K USB Receiver
- L Power Switch
- M Forward Button
- N Backward Button


2.4G USB Connection


1. Place 2 AAA batteries into the battery compartment on the underside of the keyboard (ensure correct polarity: positive and negative terminals match). Place 1 AA battery into the battery compartment on the bottom of the mouse (ensure correct polarity: positive and negative terminals match).

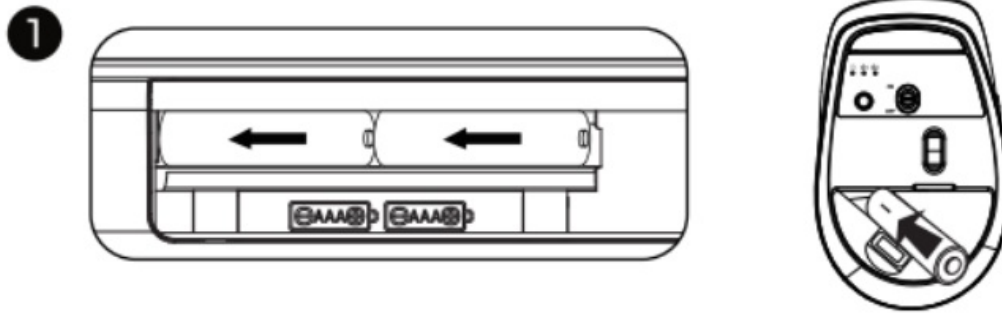

2. Turn the power switch to ON.

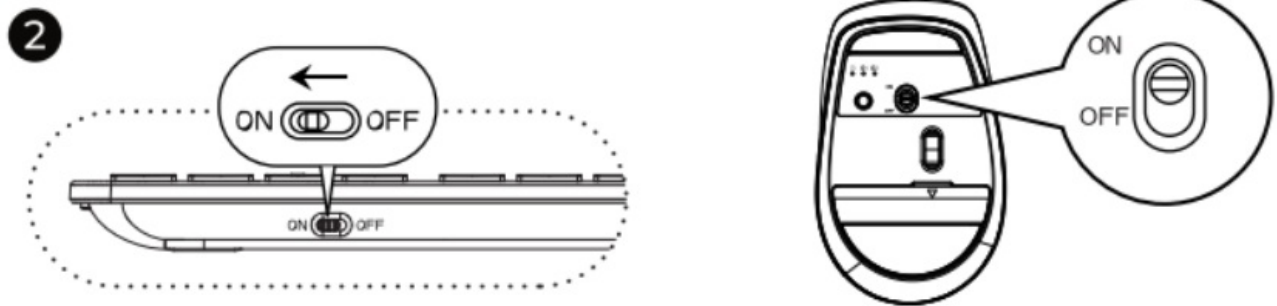

3. Press  on the keyboard until the 2.4G indicator lights up, confirming the keyboard is in 2.4G mode. Press the channel switch button on the bottom of the mouse. The 2.4G Indicator will light up, indicating the mouse is in 2.4G mode.

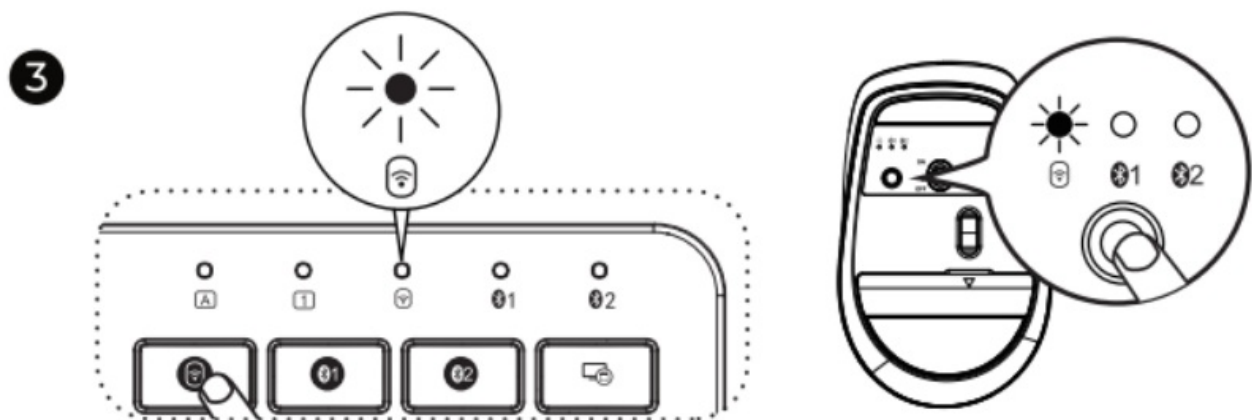

4. Take out the USB receiver from the mouse's battery compartment. (Note: The keyboard and mouse share one USB receiver.)









5. Plug the USB receiver into the USB port of the computer, then the keyboard and

mouse can work normally.




Mouse Bluetooth Connection

1. Turn the power switch to ON.
2. Press the channel switch button at the bottom of mouse, until the 1/2 light up, the mouse enters Bluetooth mode. Long press channel switch button for 3-5 seconds, 1/2 flashes quickly, the mouse enters pairing mode.

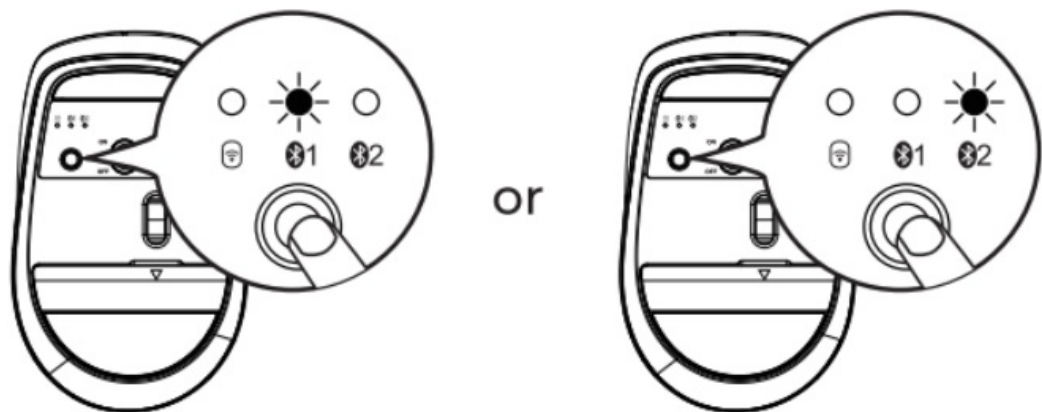
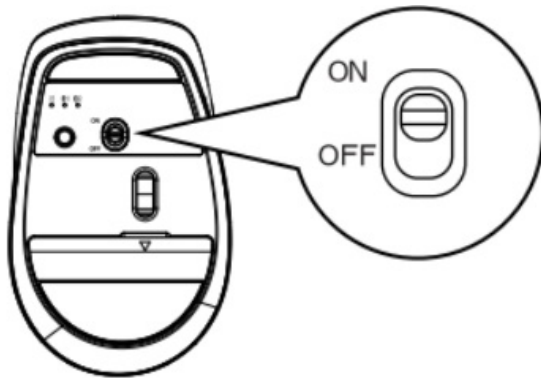


3. Turn on the Bluetooth settings on your device, search or select “SEENDA COE300” and start Bluetooth pairing until the connection is completed.

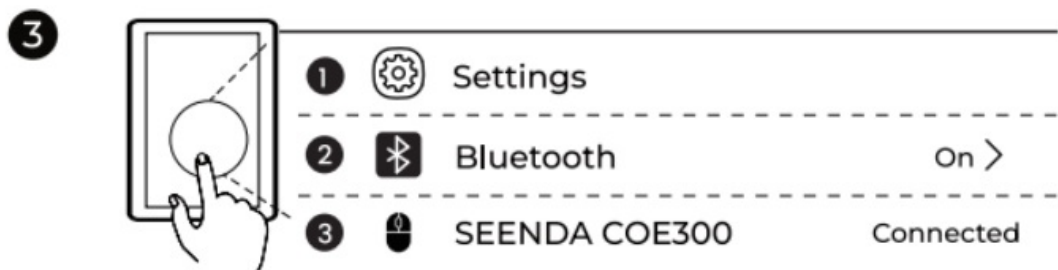


Keyboard Bluetooth Connection


1. Turn the power switch to ON.
2. Press the channel switch button 1/ 2 until the corresponding channel indicator is on.
Long-press the channel switch button for 3~5 seconds until the corresponding channel indicator flashes quickly, the keyboard enters Bluetooth pairing mode.

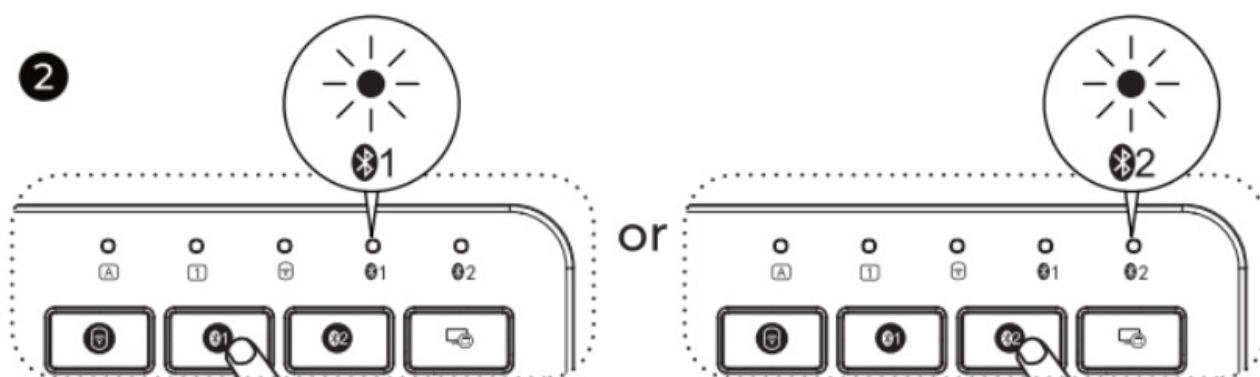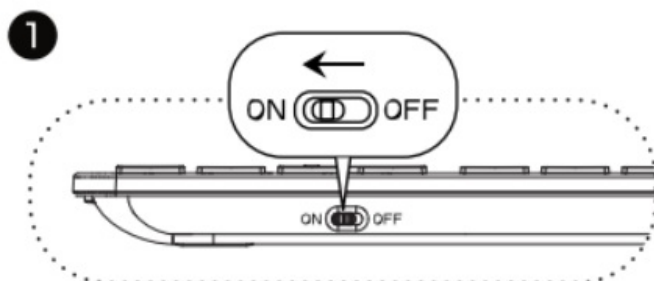

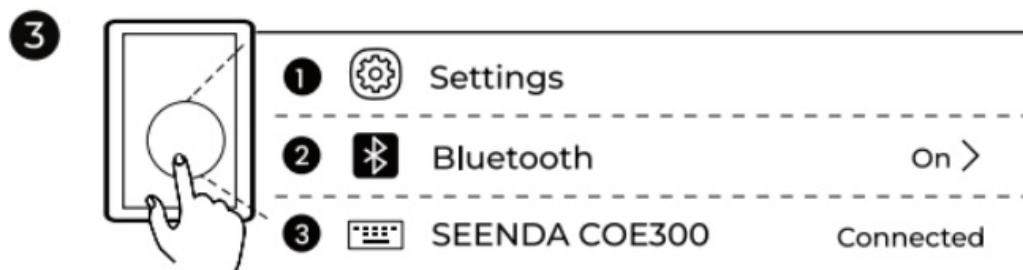


3. Turn on the Bluetooth settings on your device, search or select “SEENDA COE300” and start Bluetooth pairing until the connection is completed.




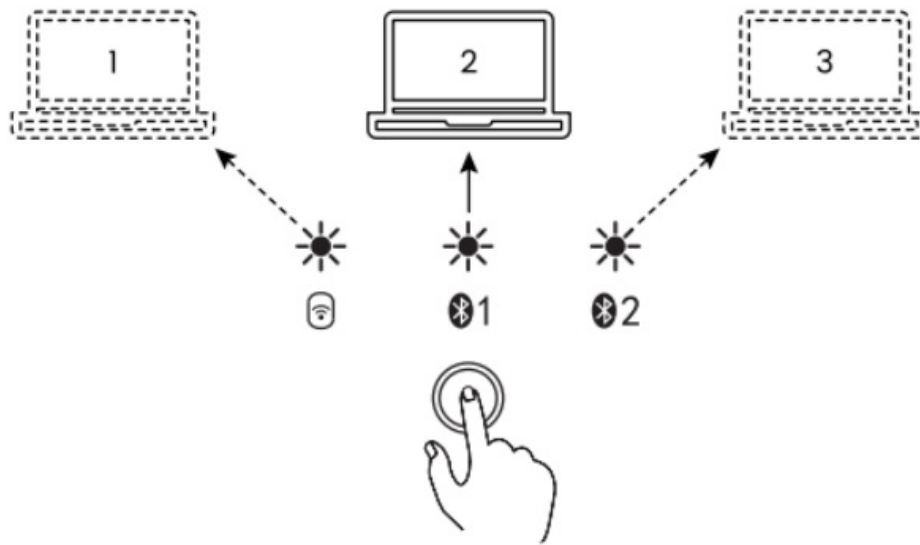


How to Switch Mouse Device Channel



After channels  |  |  are all connected, press the channel switch button on the bottom of the mouse to switch between multiple devices.

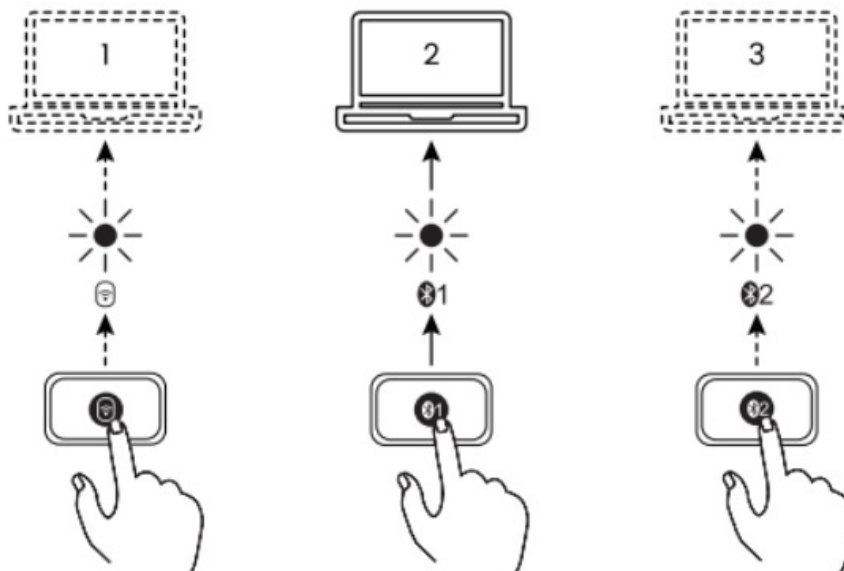How to Switch Keyboard Device Channels




After channels  |  |  are all connected, press the corresponding channel button to switch between multiple devices.

Replace the Battery for Keyboard and Mouse





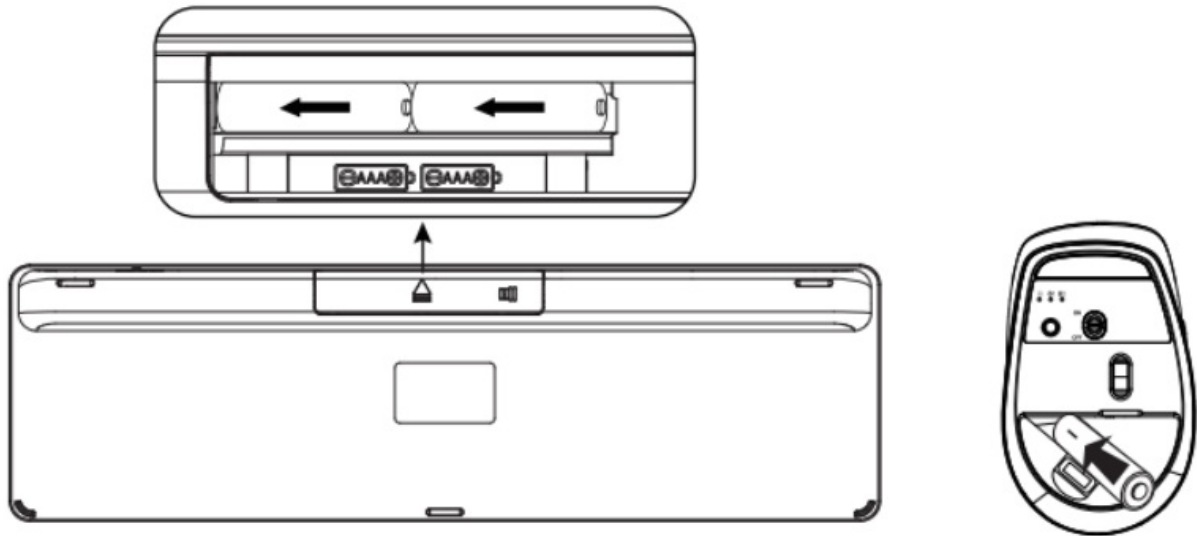






1. When the battery is low, the low-battery indicator light will blink continuously until the keyboard/mouse powers off automatically.

2. Recommended: Use reputable-brand alkaline batteries. For the keyboard: Insert 2 AAA batteries into the battery compartment on the underside of the keyboard (ensure correct polarity: do not reverse the +/- orientation). For the mouse: Insert 1 AA battery into the battery compartment on the bottom of the mouse (ensure correct polarity: do not reverse the +/- orientation).
3. The battery life for the keyboard/mouse typically ranges from 2 to 6 months. Actual battery longevity depends on multiple factors, including battery brand and type, ambient temperature and frequency of use.



Note: Battery not included

Multimedia Function Keys

Keys	Android	iPadOS	macOS	Windows
 F1	Brightness Down	Brightness Down	Brightness Down	Brightness Down
 F2	Brightness Up	Brightness Up	Brightness Up	Brightness Up
 F3	Windows witching	/	Multi-window preview	Windows witching
 F4	/	App Switching	App Switching	Multi-window preview
 F5	Show Desktop	/	Show Desktop	/
 F6	Search	Search	Search	Search
 F7	Previous	Previous	Previous	Previous
 F8	Play/Pause	Play/Pause	Play/Pause	Play/Pause
 F9	Next	Next	Next	Next
 F10	Mute	Mute	Mute	Mute
 F11	Volume Down	Volume Down	Volume Down	Volume Down
 F12	Volume Up	Volume Up	Volume Up	Volume Up
	Screenshot	Screenshot	Screenshot	Screenshot
	/	Lock	Lock	Lock
Esc 	Press FN+ESC to turn ON /OFF the FN function			

Default Lock Off: Pressing F1-F12 directly activates the multimedia functions, pressing FN + F1-F12 activates the F-key functions.

FN Lock On: Pressing F1-F12 directly activates the F-key functions, pressing FN + F1-F12 activates the multimedia functions.

Product Specifications

Keyboard Specifications:

Working voltage	DC 2.0-3.0V
Working current	≤3.5mA
Sleeping current	≤0.02mA
Wake up way	Press any key
Dimensions	17.2*5.1*0.7 inch

Mouse Specifications:

DPI	800-1200-1600-2400
Working voltage	DC 1.0-1.5V
Working current	≤5mA
Standby current	≤0.5mA
Sleeping current	≤0.02mA
Wake up way	Press any key
Dimensions	4.3*2.7*1.5 inch

System Compatibility:







2.4G Mode	Windows XP, 7 to 11;
Bluetooth Mode	Windows 8/10 or above, macOS 10.12 or above, iPadOS 7.0 or above, Android 4.4 or above.

How to Use Special Characters in British English

On macOS/iPadOS system:

On macOS/iPadOS system:

Press the key and you can type the symbol shows in the right square frame.

Press and hold the key "Shift", then press the corresponding key. you can type the symbol shows in the right square frame.

Press and hold the key "Option/Win", then press the corresponding key, you can type the symbol shows in the right square frame.


	
--	---

Press and hold the key "Fn", then press the corresponding key. you can type the symbol shows in the right square frame.

			
---	---	---	---






On Android/Windows:






Press the key and you can type the symbol shows in the right square frame.

Press and hold the key "Shift", then press the corresponding key. you can type the symbol shows in the right square frame.

Press and hold the key "  ", then press the corresponding key, you can type the symbol shows in the right square frame.			
			

Press and hold the key "  ", then press the corresponding key, you can type the symbol shows in the right square frame.			
			

Sleep Mode

1. When the keyboard and mouse is not used for more than 60 minutes, it will automatically enter into sleep mode and the indicator light will turn off.
2. When using the keyboard and mouse again, just press any key. The keyboard will wake up within 3 seconds, and the lights come back on and keyboard starts working.

Package Content

- 1* Keyboard
- 1* Mouse (The receiver is on the bottom of the mouse)
- 1* User Manual

Safety Warning

- **IMPORTANT:** To reduce risk of fire, electric shock, or injury, follow these safety instructions.
- **Heat Exposure:** Avoid leaving the item in high-temperature environments or in direct sunlight, which could result in a fire hazard.
- **Liquid Exposure:** Keep the item away from water and liquids. Do not use if wet until thoroughly dried.
- **Damage and Leakage:** Cease usage and consult customer service if the item is damaged or the battery leaks.
- **Correct Disposal:** Follow local regulations for disposing of electronic devices and batteries. Do not dispose of with household waste.
- **Radio Frequency Interference:** This device may cause interference with other electronics. Keep a safe distance from sensitive devices.

- Child Safety: Keep the item and its components out of reach of children to avoid choking or battery ingestion hazards. Never allow children to handle the item unsupervised.
- CAUTION: Non-compliance with the above warnings can lead to serious injury or property damage.

EU Declaration of Conformity

- Declared Object: Multi-Device Colored Keyboard Mouse Combo
- Model: COE202
- Rating: Keyboard: 1.5V10mA
- Mouse: 1.5V 10mA
- Place of Production: Made in China
- Manufacturer: Dongguan Lingjie Electronics& Technology Co., Ltd
- E-mail: andymo@szforter.com
- Address: Kulding Ton, D, Thgang My, Road, Ta Province, China, 523590

EC REP European Representative:

- Business name: g.L.L. GmbH
- Business address: Bauernvogtkoppel, 55c, 22393, Hamburg, Germany
- Email: g.L.L.DE@outlook.com

UK REP Business name: AMANTO INTERNATIONAL TRADE LIMITED

- Business address: The Imperial, 31-33 St Stephens Gardens, Notting Hill, London, United Kingdom, W2 5NA
- Email: AmantoUK@outlook.com

It is our sole responsibility to declare that the above products are in full compliance with Directive 2014/53/EU, 2011/65/EU (as amended)

- Position: Managing Director
- Signature:
- Date of Sign: 2022.1.5

- EU agent name:
- Date of Sign: 2022.1.5



Product Warranty

All Seenda products come with a 24-month warranty policy, please do not hesitate to contact us if you have any questions. Our support team will try our best to provide you with a pleasant shopping experience.

- Our email: support@seenda.com
- Our website: www.seenda.com

Documents / Resources

	<p>SEENDA COE300 Multi Device Wireless Bluetooth Keyboard and Mouse Set [pdf] User Manual</p> <p>COE300, COE300 Multi Device Wireless Bluetooth Keyboard and Mouse Set, Multi Device Wireless Bluetooth Keyboard and Mouse Set, Wireless Bluetooth Keyboard and Mouse Set, Bluetooth Keyboard and Mouse Set, Keyboard and Mouse Set</p>
---	---

References

- [User Manual](#)

SeenDa

Bluetooth Keyboard and Mouse Set, COE300, COE300 Multi Device Wireless Bluetooth Keyboard and Mouse Set, Keyboard and Mouse Set, Multi Device Wireless Bluetooth Keyboard and Mouse Set, SeenDa, Wireless Bluetooth Keyboard and Mouse Set

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.