

Brondell SMB-25

Brondell SMB-25 Side Mounted Manual Bidet Attachment User Manual

Model: SMB-25

1. PRODUCT OVERVIEW

The Brondell SMB-25 is a side-mounted manual bidet attachment designed for toilet seats. It features solid brass construction with a durable chrome finish, offering an adjustable cool or heated water wash. The bidet includes precision pressure control and a manual swing-action sprayer arm for targeted rinsing. This model is designed for easy installation and aims to provide a hygienic cleaning experience.



Brondell

SMB-25

Side-Mounted Bidet Attachment
with Adjustable Spray Wand,
Dual Temperature

A plastic-free bidet that delivers.

Enjoy a fully adjustable, warm or cool water wash. Manual, swing-action nozzle delivers a perfectly aimed rinse with precision water pressure and temperature control.

Image 1.1: The Brondell SMB-25 Side Mounted Bidet Attachment shown installed on a standard toilet.

2. KEY FEATURES

- **Adjustable Wash:** Manual swing-action nozzle arm for precise positioning and a perfectly aimed rinse.
- **Dual Temperature:** Fully adjustable water temperature (cool or heated) for user comfort. Includes a hot water flex tubing for connection to the sink's water supply.
- **Durable Construction:** Zinc-plated all-brass bidet attachment with a safe-core ceramic internal valve and all-metal components. Features a durable chrome finish.
- **Thin Profile:** Ultra-thin frame designed for installation beneath any toilet seat without creating a gap or adding bulk.
- **Easy Installation:** Simple DIY installation that requires no batteries or electricity.
- **Pressure Control:** Easy-twist knob for controlling water flow and pressure.
- **Scratch Protection:** Rubber pads are included to guard against scratches on the toilet seat.



Image 2.1: Product information diagram illustrating the attachment bracket, control valve body, and spray wand with dimensions.

3. INCLUDED COMPONENTS

Verify that all components are present before beginning installation.

- Bidet Attachment (Main Unit)
- Metal Nut
- Metal Washer
- Mounting Guide Bolt
- Small Rubber Washer
- Stainless Steel T-Valve
- Metal Braided Cold Water Supply Hose
- Hot Water Flex Tubing

4. INSTALLATION GUIDE

This section provides general installation steps. Refer to the detailed owner's manual for specific diagrams and instructions.

4.1. Preparation

1. Turn off the water supply to your toilet at the shut-off valve.
2. Flush the toilet to drain the tank.
3. Disconnect the existing cold water supply line from the toilet tank.
4. Remove the toilet seat by unscrewing the mounting bolts.

4.2. Bidet Attachment Installation

1. Position the bidet attachment on the toilet rim, aligning the mounting holes with the toilet seat holes. Ensure the rubber pads are in place to prevent scratches.
2. Reinstall the toilet seat over the bidet attachment and secure it with the original mounting bolts. Do not overtighten.
3. Connect the stainless steel T-Valve to the toilet tank's water inlet.
4. Connect the metal braided cold water supply hose from the T-Valve to the bidet attachment's cold water inlet.
5. For dual temperature functionality, connect the hot water flex tubing to the bidet attachment's hot water inlet and route it to your sink's hot water supply line. Install a T-adaptor (not always included, may need separate purchase) at the sink's hot water line to connect the flex tubing.
6. Ensure all connections are hand-tight, then use a wrench for a quarter-turn to secure. Avoid overtightening.

4.3. Final Steps

1. Slowly turn on the main water supply to the toilet.
2. Check for any leaks at all connection points. Tighten gently if necessary.
3. Test the bidet functionality as described in the "Operation" section.

A just-showered
clean, every time.

Full-coverage spray pattern reduces
or eliminates the need for toilet paper
in your bathroom.



Image 4.1: Visual guide for connecting the bidet attachment to the toilet's water supply.

5. OPERATING INSTRUCTIONS

5.1. Using the Bidet

1. Sit comfortably on the toilet seat.
2. Locate the control knob on the side of the bidet attachment.
3. Gently turn the knob to activate the water spray. The further you turn, the higher the water pressure.
4. Adjust the swing-action nozzle arm manually to achieve the desired spray position.
5. For dual temperature models, adjust the temperature control (if applicable and connected to hot water) to your preference.
6. Once cleaning is complete, turn the knob back to the off position to stop the water flow.
7. Ensure the nozzle arm is returned to its resting position.

Manual swing-action arm lever controls nozzle positioning.



Ultra-thin frame installs beneath any toilet seat, without adding extra bulk.

Image 5.1: The manual swing-action arm and control lever for nozzle positioning and water pressure adjustment.

Sustainability in your bathroom.

A sustainable alternative to plastic bidet attachments, our Side-Mounted Bidet offers a refreshing cleanse without the need for electricity or toilet paper.

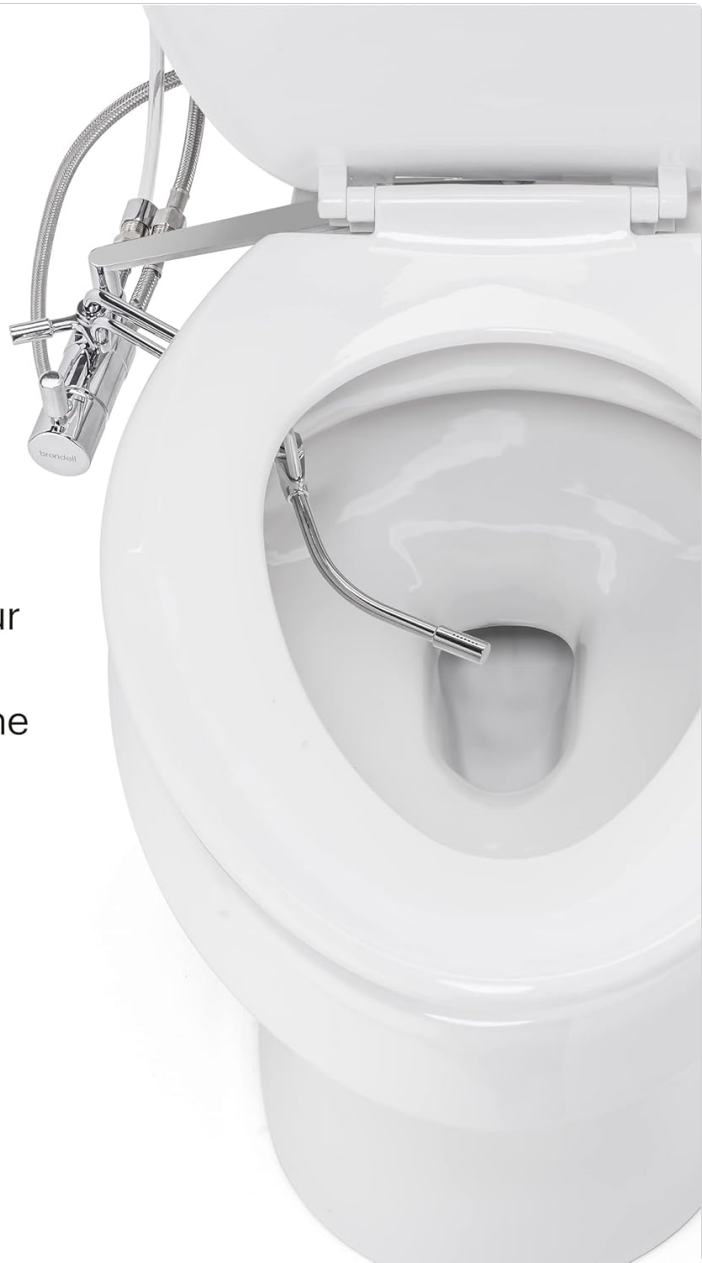


Image 5.2: Illustration of the full-coverage spray pattern provided by the bidet nozzle.

6. CARE AND MAINTENANCE

6.1. Cleaning the Bidet

- Regularly wipe down the exterior of the bidet attachment with a soft, damp cloth and a mild, non-abrasive cleaner.
- Avoid using harsh chemicals, abrasive pads, or strong detergents, as these can damage the chrome finish.
- To clean the nozzle, gently pull it out and wipe it with a soft cloth. Some models may have a self-cleaning function; refer to the full manual if available.

6.2. Winterization (if applicable)

- If the bidet is installed in an unheated area prone to freezing temperatures, it is recommended to drain the water from the bidet and supply lines to prevent damage.
- Turn off the water supply, disconnect the hoses, and allow any residual water to drain.

7. TROUBLESHOOTING GUIDE

Problem	Possible Cause	Solution
No water spray or weak spray	Water supply valve closed Hoses kinked or blocked Nozzle clogged	Ensure water supply valve is fully open. Check hoses for kinks and clear any blockages. Clean the nozzle.
Water leaks from connections	Loose connections Damaged washers	Gently tighten connections with a wrench. Check washers for damage and replace if necessary.
No hot water (Dual Temp models)	Hot water supply to sink is off Hot water flex tubing not connected or kinked	Ensure hot water supply to sink is on. Verify hot water flex tubing is correctly connected and free of kinks.

8. PRODUCT SPECIFICATIONS

Attribute	Detail
Brand	Brondell
Model Name	Side Mounted
Model Number	SMB-25
Material	Brass (Body), Zinc (Handle)
Finish Type	Polished Chrome
Mounting Type	Side Mount
Handle Type	Lever
Special Feature	Durable, Dual Temperature
Item Weight	2.3 Pounds
Power Source	Non-electric (Water Pressure Operated)

9. WARRANTY AND SUPPORT

9.1. Manufacturer's Warranty

The Brondell SMB-25 Bidet Attachment comes with a **1-Year Limited Manufacturer's Warranty**. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

9.2. Customer Support

For technical assistance, troubleshooting, or warranty inquiries, please contact Brondell customer support. Contact information can typically be found on the Brondell official website or in the packaging materials.

