

SenseFuture VCS100 VCS Laser Current Driver Instruction Manual

[Home](#) » [SenseFuture](#) » SenseFuture VCS100 VCS Laser Current Driver Instruction Manual 



VCS Laser Current Driver
PRODUCT INTRODUCTION MANUAL
Striving for the Bright Future of Precision Optical Measurement.
SenseFuture Technologies Co., Ltd.
Laser Current Driver (VCS Series)

Contents

- [1 Product Functions](#)
- [2 Product Features](#)
- [3 Product Parameters](#)
- [4 Interface Introduction](#)
- [5 Dimensional Drawing](#)
- [6 Test Data \(Partial\)](#)
- [7 Instructional Video](#)
- [8 Partners](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

Product Functions

VCS is primarily used for low-noise current driving of lasers, allowing adjustment of laser driving current by varying the input voltage.



Figure1 VCS100 (left) VCS250/500/1000 (right)

Product Features

- Capable of outputting up to 23V, suitable for driving virtually all low-power lasers, including DFB, VCSEL, ICL, QCL, etc.
- Capable of outputting up to 1A current, suitable for driving virtually all low-power lasers, including DFB, VCSEL, ICL, QCL, etc.
- Maximum output current can be limited via a potentiometer, ensuring laser safety.
- Supports remote control of output enablement and monitoring of output current.
- Offers super-stable output current bias and permits current modulation.

Product Parameters

Table1 Basic Parameters of VCS

PARAMETERS	MODEL				UNIT
	VCS100	VCS250	VCS500	VCS1000	
Current-to-Voltage Ratio	20	50	100	200	mA/V
Maximum Output Current	100	250	500	1000	mA
Supply Voltage	12~24				V
Output Voltage / Compliance Voltage	Supply Voltage-1				V
Current Noise	<0.9				μA
Temperature Coefficient Impact	<50				ppm/°C
Temperature Coefficient Impact	2				mA
Regulation Rise/Fall Time	800/600				ns
Modulation Depth	90%				@1MHz
Bandwidth (3dB Point)	2				MHz
Modulation Input Voltage Range	0~5				V
Input Pin Impedance	10				MΩ
Remote Enable Voltage Input	Output Enable: High Level (>2V, I>5mA) Output Disable: Low Level (<2V)				
Current Monitoring Factor	50	20	10	2	V/A
Operating Ambient Temperature Range	-20~60			-20~35	°C
Operating Ambient Humidity Range	0~98				%RH
Heat Dissipation Requirements	No additional cooling required within the rated operating range				
Dimensions	47.5*42.8*19.5			47.5*42.8*32.2	mm
Weight	≈50			≈100	g

Interface Introduction

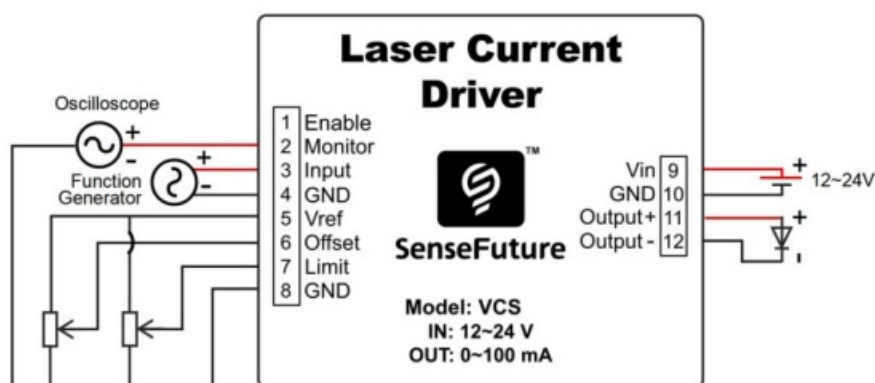


Figure2 Wiring Diagram of VCS
Table2 Pin Definition Table for VCS

Number	Pin Name	Pin Type	Pin Definition
1	Enable	Input	The enable port: when at a low level, the laser current driver does not operate; when at a high level or floating, the laser current driver operates.
2	Monitor	Output	Actual current monitoring pin (0~5V)
3	Input	Input	Modulation Voltage Input Pin (0~5V)
4	GND	Input	Signal Ground Pin
5	Vref	Output	Reference Voltage Output Interface (0~5V)
6	Offset	Input	Current Bias Interface (0~5V)
7	Limit	Input	Current Limiting Interface (0~5V)
8	GND	Input	Signal Ground Pin
9	Vin	Input	Power Supply Positive Input Pin (12~24V)
10	GND	Output	Power Supply Negative Input Pin
11	Output+	Output	Positive Current Output
12	Output-	Output	Negative Current Output

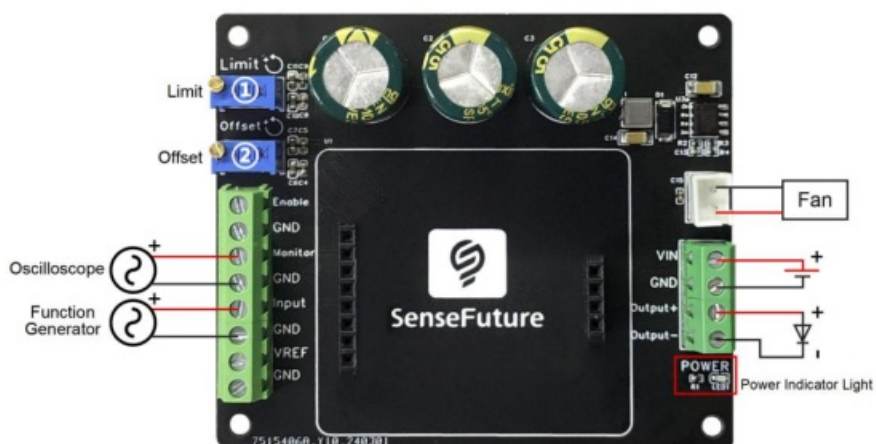


Figure3 Wiring Diagram of VCS Adapter Board

	Knob Name	Function
①	Limit	Maximum Output Current Limit Adjustment Knob, turns clockwise to decrease , counter-clockwise to increase.
②	Offset	Output Bias Current Adjustment Knob, turns clockwise to decrease, counter-clockwise to increase.

Dimensional Drawing

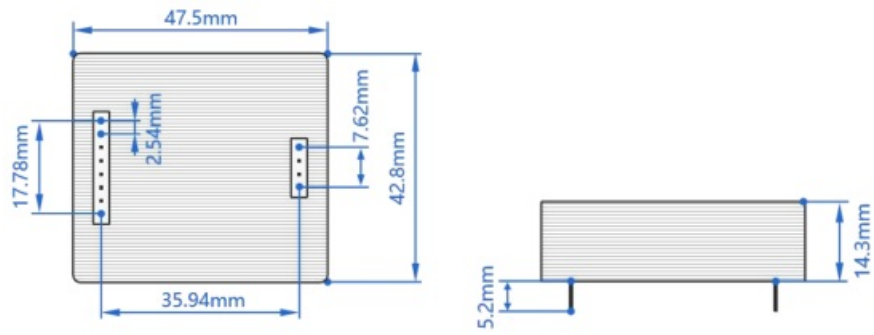


Figure4 Dimensional drawing of VCS100

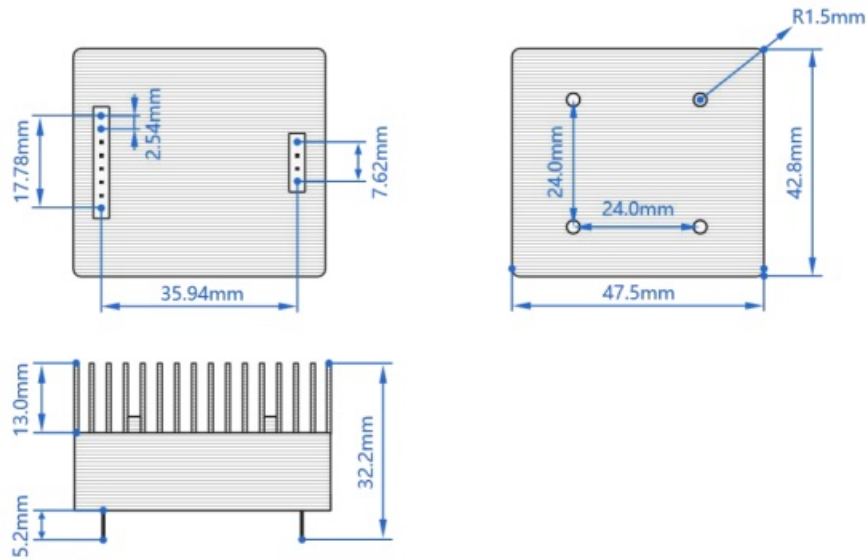


Figure5 Dimensional drawing of VCS250/500/1000

Test Data (Partial)

6.1 Current Noise Spectral Density

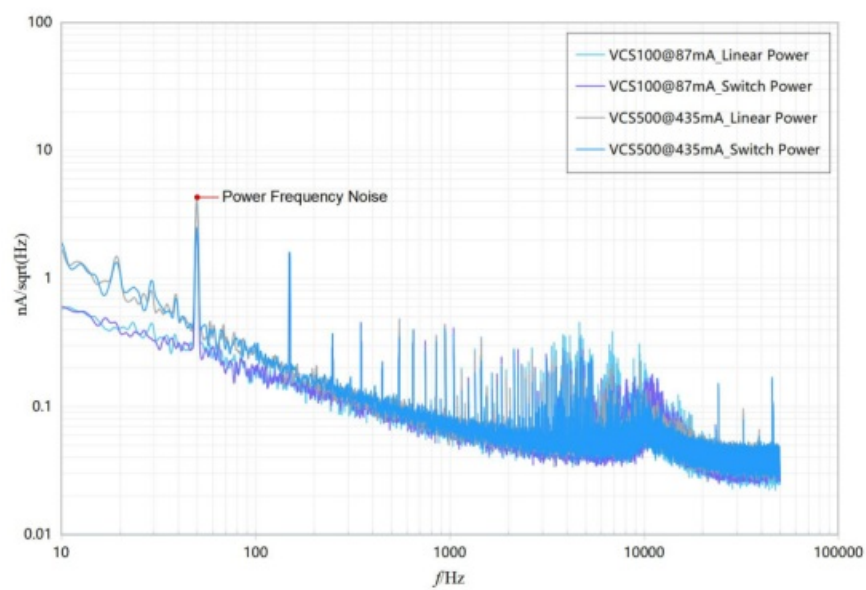


Figure6 Current Noise Spectral Density Plot of VCS

6.2 Rise/Fall Time

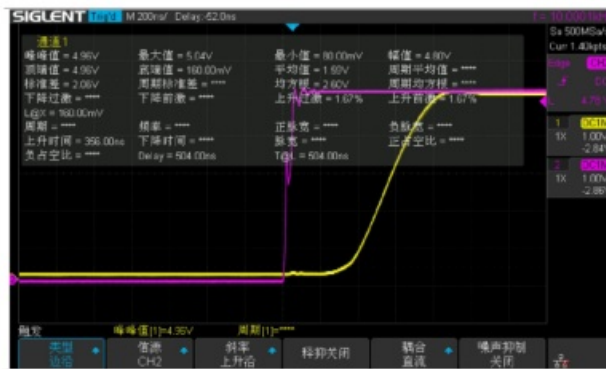


Figure7 Rise Time Test Graph

(Purple: Rising edge signal input from 0V to 5V, tested with a 10 Ohm load; Yellow: Actual curve of the current rise)



Figure8 Fall Time Test Graph

(Purple: Falling edge input from 5V to 0V, tested with a 10 Ohm load; Yellow: Actual curve of the current decay)

6.3 Modulation Depth

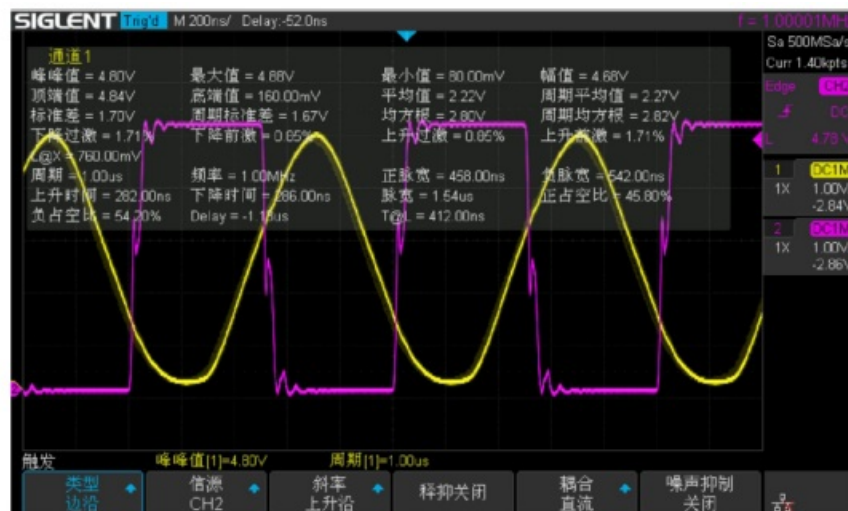


Figure9 Modulation Depth Test Graph

(Purple: A 1 MHz square wave signal input ranging from 0V to 5V, tested with a 10 Ohm load;
Yellow: The curve representing the actual current decay to 90% of its initial value)

6.4 Modulation Bandwidth 3dB



Figure10 Modulation Bandwidth Test Diagram
(Purple: A 2 MHz sinusoidal signal input ranging from 0V to 5V, tested with a 10 Ohm load;
Yellow: The curve representing the actual current response after a 3dB drop)

6.5 Temperature Drift Test VCS100

Load Resistance Ω	Temperature $^{\circ}\text{C}$	Current(A)
10	-20	0.0415605
10	-10	0.0415805
10	10	0.0416017
10	20	0.0416302
10	30	0.0416501
10	40	0.0416751
10	50	0.0417005
Temperature Coefficient (ppm/ $^{\circ}\text{C}$)		47.08

Instructional Video

YouTube

 SenseFuture Laser Current Driver (VCS Series) Instructions for Use <https://www.youtube.com/watch?v=oxOiF9q8Rxl&t=34s>

Partners

01 Universities and Research Institutes





Add 4F, Building B, Gaoke Innovation Center, Guangming District, Shenzhen, Guangdong, China
Tel +86 191 2054 5883
Mail sales@sensefuture.com
Web www.sensefuture.com / www.sensefuture.com.cn

Original Aspiration Determines the Future, Innovation Creates Value, Sharing Unites Hearts.
Looking forward to achieving win-win cooperation with you!

Download



<https://drive.weixin.qq.com/s?k=AOUACgeIACgQ71UAUE>

SenseFuture Technologies Co., Ltd.

Documents / Resources

	SenseFuture VCS100 VCS Laser Current Driver [pdf] Instruction Manual VCS100, VCS250, VCS500, VCS1000, VCS100 VCS Laser Current Driver, VCS100, VCS Laser Current Driver, Laser Current Driver, Current Driver
--	--

References

-  _____
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.