



Sharkoon PureWriter RGB Mechanical Low Profile Keyboard User Manual

[Home](#) » [sharkoon](#) » Sharkoon PureWriter RGB Mechanical Low Profile Keyboard User Manual 

Contents

- [1 Sharkoon PureWriter RGB Mechanical Low Profile Keyboard](#)
- [2 Specifications](#)
- [3 Connect](#)
- [4 US Layout](#)
- [5 Overview](#)
- [6 Legal Disclaimer](#)
- [7 Disposal of your old products](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)



Sharkoon PureWriter RGB Mechanical Low Profile Keyboard



Specifications

General:

	Red	Blue
■ Type	Office (Low Profile Keyboard)	Office (Low Profile Keyboard)
■ Switch Technology	Mechanical (Kailh Red)	Mechanical (Kailh Blue)
■ Illumination	RGB	RGB
■ Adjustable Illumination	✓	✓
■ Lighting Effect	✓	✓
■ Max. Polling Rate	1,000 Hz	1,000 Hz
■ Gaming Mode	✓	✓
■ Block	3-Block Layout	3-Block Layout
■ Weight without Cable	642 g	642 g
■ Dimensions (L x W x H)	436 x 127 x 35 mm	436 x 127 x 35 mm
■ Supported Operating Systems	Windows 7/8/10, Android*	Windows 7/8/10, Android*

Key Properties:

■ Multimedia Keys	4	4
■ Function Keys with Preset Multimedia Actions	✓	✓
■ Anti-Ghosting Keys	✓	✓
■ N-Key Rollover Support	✓	✓
■ Operating Force	45 g	55 g
■ Switch	Linear	Tactile
■ Switching Point	Undetectable	Detectable
■ Click Point	Undetectable	Precisely Detectable
■ Distance to Actuation Point	1.5 mm	1.5 mm
■ Operating Life Cycles of Keys	Min. 50 Million Keystrokes	Min. 50 Million Keystrokes

Cable and Connectors:


■ Connector	USB	USB
■ Cable Length	150 cm 50 cm	150 cm 50 cm
■ Gold-Plated USB Plug	✓	✓

Package Contents:

■ PureWriter RGB, Manual, USB Cable (50 cm), USB Cable (150 cm)

* OTG Adapter required

Connect

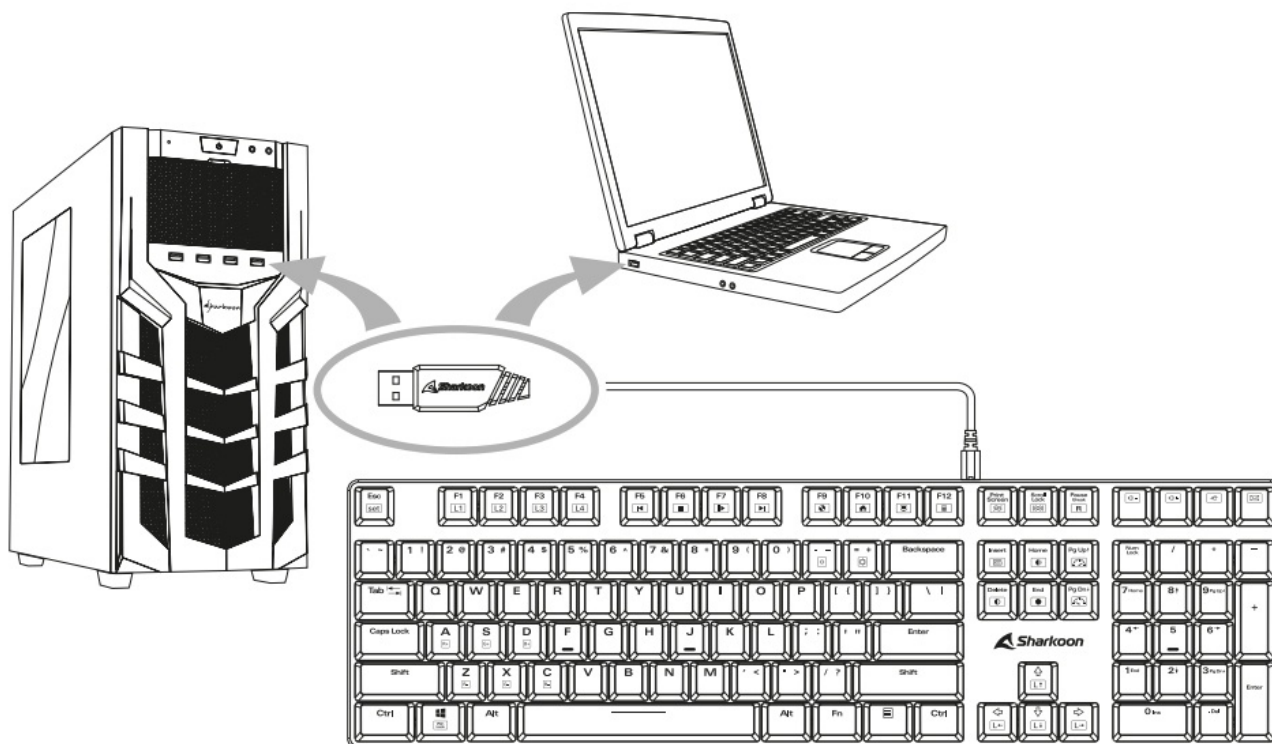

US Layout

Lighting Profiles and Lighting Effects

Fn + Esc	Set Up Lighting Profiles	Fn + F7	Lighting Effect 7 - 8	Fn + F12	Pulsating
Fn + F1	Lighting Profiles	Fn + F8	Reset to Factory Default	Fn + F11	Color Change / Permanent
Fn + F2	Brightness + / -	Fn + F9	Frequency + / -	Fn + F10	Effect Direction
Fn + F3	Lighting Effect 1 - 3	Fn + F10	Red component + / - *		
Fn + F4	Lighting Effect 4	Fn + F11	Green component + / - *		
Fn + F5	Lighting Effect 5 - 6	Fn + F12	Blue component + / - *		

Multimedia Keys

Fn + F13	Volume Down / Up
Fn + F14	Mute
Fn + F15	E-Mail

Key Lock Function

Fn + Windows Key
Windows Key Locked

Function Keys with Preset Multimedia Actions

Fn + F5	Previous / Next Track
Fn + F6	Stop
Fn + F7	Play / Pause
Fn + F8	Media Player
Fn + F9	Web Browser
Fn + F10	My Computer
Fn + F11	Calculator


US Layout Keyboard Diagram

The diagram shows a US layout keyboard with various keys highlighted in different colors to indicate their functions. The keys are arranged in a standard QWERTY layout. The function keys (F1-F12) are highlighted in red. The multimedia keys (F13-F15) are highlighted in yellow. The function keys with preset multimedia actions (F5-F12) are highlighted in green. The Windows key is highlighted in blue.

*Changing the current color is only possible while using the "Permanent" lighting effect.


Overview

Lighting Effects

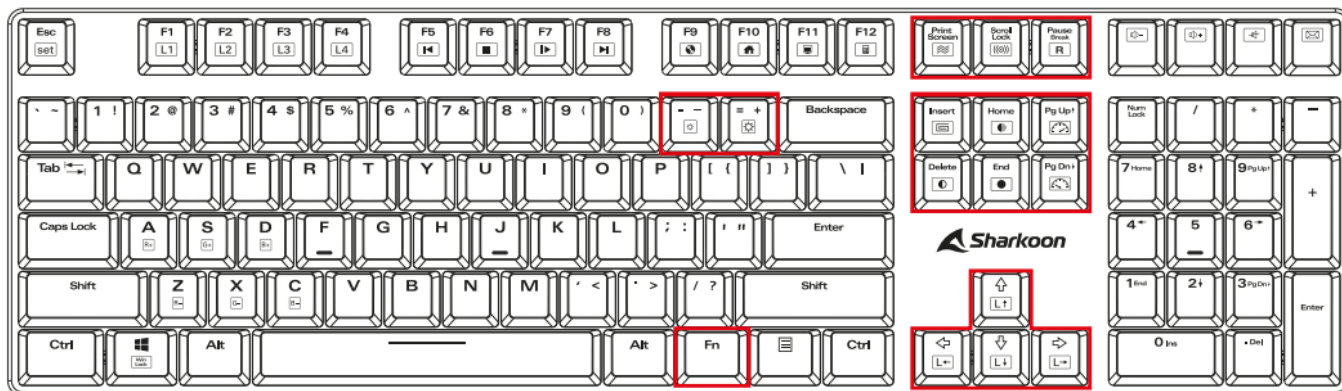

Lighting Effect	Effect Direction	Change of Color	Frequency Change
Lighting Effect 1	left, right, up, down	Automatically	ü
Lighting Effect 2	N/A	Automatically	ü
Lighting Effect 3	left, right	Automatically	ü
Lighting Effect 4	N/A	Fn + Scroll Lock	ü
Lighting Effect 5	N/A	Automatically	ü
Lighting Effect 6	N/A	Automatically	ü
Lighting Effect 7	N/A	N/A	ü
Lighting Effect 8	N/A	Fn + Home	ü
Pulsating	N/A	Fn + Delete	ü
Color Change	N/A	N/A	ü
Permanent	N/A	Fn + End	N/A

Individual Color Settings

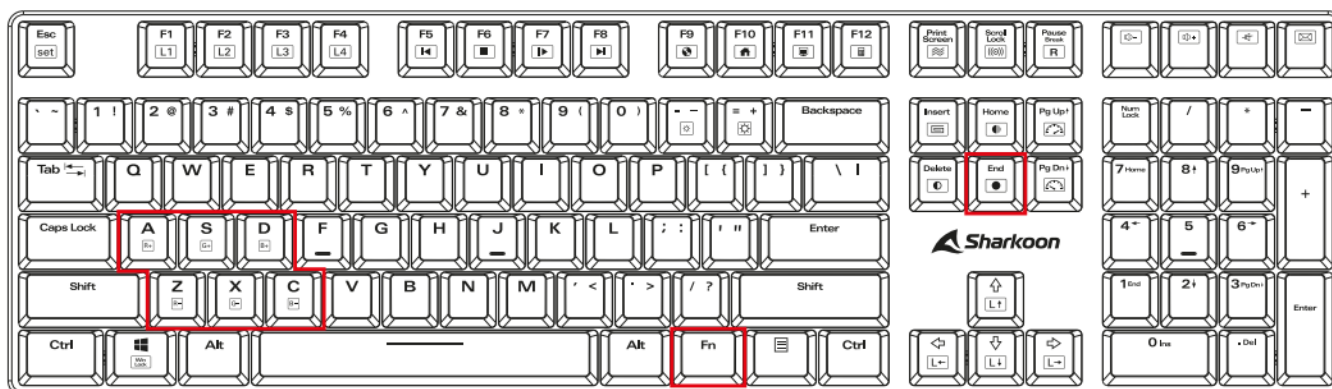


The settings of an individual color from the RGB spectrum only works with the “Permanent” lighting effect. Therefore, first select “Permanent” lighting effect. Press and hold the Fn key and then press twice the End key.

The “Permanent” lighting effect has seven preset colors (red, green, yellow, blue, turquoise, pink and white), which can be access and cycled through

by repeatedly pressing the Fn + End key combination. The original color is overridden.
To increase the red component of a color, press Fn + A and to reduce press Fn + Z. Increase the green component with Fn + S, and reduce with Fn + X. The blue component increases with Fn + D, and reduces with Fn + C. If the color components can no further increase or decrease, the corresponding keys light up in the respective color they control

Lighting Profiles

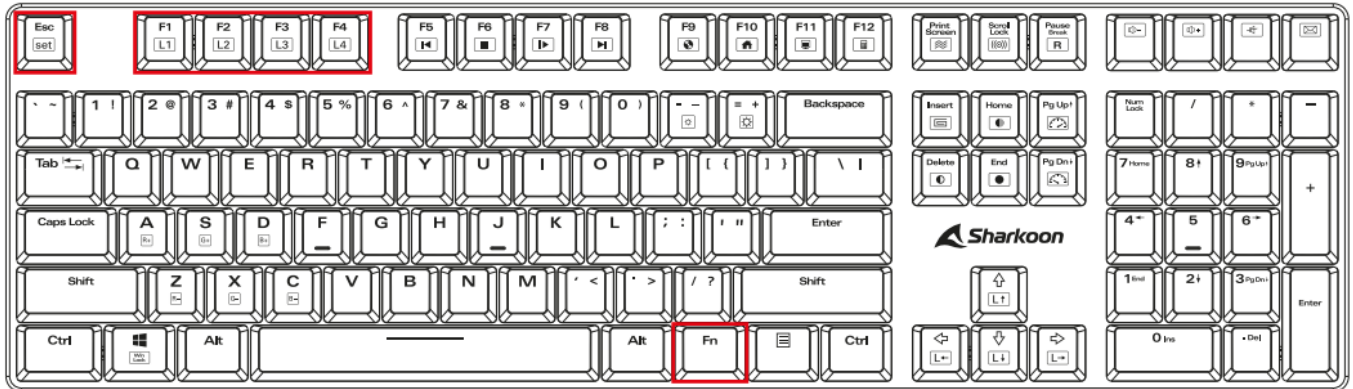

To set up lighting profiles, press and hold the Fn key, and then press ESC. The lighting profile keys F1 to F4 will start blinking. Now select a profile by pressing the corresponding F-key; then press all the keys that should be permanently illuminated. Press a key several times to change its illumination color. Choose from red, green, yellow, blue, turquoise, pink and white. To turn off the illumination on a particular key, cycle through all the colors until the lighting goes out. While pressing and holding the Fn key, press the ESC key to save the selected key illumination in the previously selected lighting profile key.

Legal Disclaimer

For potential loss of data, especially due to inappropriate handling, SHARKOON assumes no liability. All named products and descriptions are trademarks and/or registered trademarks of the respective manufacturers and are accepted as protected. As a continuing policy of product improvement at SHARKOON, the design and specifications are subject to change without prior notice. National product specifications may vary. All rights reserved especially (also in extracts) for translation, reprinting, reproduction by copying or other technical means. Infringements will lead to compensation. All rights reserved especially in case of assignment of patent or utility patent. Means of delivery and technical modifications reserved.

Disposal of your old products



Your product is designed and manufactured with high quality materials and components, which can be recycled and reused.

When this crossed-out wheeled bin symbol is attached to a product, it means the product is covered by the European Directive 2012/19/EU.

Please be informed about the local separate collection system for electrical and electronic products. Please act according to your local rules and do not dispose of your old products with your normal household waste. The correct disposal of your old product will help prevent potential negative consequences to the environment and human health.

Sharkoon Technologies GmbH
Grüninger Weg 48
35415 Pohlheim
Germany

Documents / Resources

	<p>Sharkoon PureWriter RGB Mechanical Low Profile Keyboard [pdf] User Manual</p> <p>PureWriter RGB Mechanical Low Profile Keyboard, PureWriter, RGB Mechanical Low Profile Keyboard, Low Profile Keyboard, Profile Keyboard, Keyboard</p>
	<p>Sharkoon PureWriter RGB Mechanical Low Profile Keyboard [pdf] User Manual</p> <p>PureWriter RGB Mechanical Low Profile Keyboard, PureWriter RGB, Mechanical Low Profile Keyboard, Low Profile Keyboard, Profile Keyboard, Keyboard</p>