


Shelly Qubino QNSW-001P16AU Z-Wave Smart Switch with Power



Shelly Qubino QNSW-001P16AU Z-Wave Smart Switch with Power User Guide

[Home](#) » [Shelly Qubino](#) » Shelly Qubino QNSW-001P16AU Z-Wave Smart Switch with Power User Guide 

Contents

- [1 Shelly Qubino QNSW-001P16AU Z-Wave Smart Switch with Power](#)
- [2 USER AND SAFETY GUIDE](#)
- [3 READ BEFORE USE](#)
- [4 TERMINOLOGY](#)
- [5 ABOUT SHELLY QUBINO](#)
- [6 ABOUT THE DEVICE](#)
- [7 INSTALLATION INSTRUCTIONS](#)
- [8 LEGEND](#)
- [9 EXTENDED USER GUIDE](#)
- [10 SPECIFICATIONS](#)
- [11 OPERATIONAL INSTRUCTIONS](#)
- [12 SUPPORTED LOAD TYPES](#)
- [13 IMPORTANT DISCLAIMER](#)
- [14 Documents / Resources](#)
 - [14.1 References](#)



Shelly Qubino QNSW-001P16AU Z-Wave Smart Switch with Power



USER AND SAFETY GUIDE

Z-Wave® smart switch with power measurement

READ BEFORE USE

This document contains important technical and safety information about the Device, its safe use, and installation.

CAUTION! Before beginning the installation, please read carefully and entirely this guide and any other documents accompanying the device. Failure to follow the installation procedures could lead to malfunction, danger to your health and life, violation of law or refusal of legal and/or commercial guarantee (if any). Shelly Europe Ltd. is not responsible for any loss or damage in case of incorrect installation or improper operation of this Device due to failure of following the user and safety instructions in this guide.

TERMINOLOGY

Gateway – A Z-Wave® gateway, also referred to as a Z-Wave® controller, Z-Wave® main controller, Z-Wave® primary controller, or Z-Wave® hub, etc., is a device that serves as a central hub for a Z-Wave® smart home network. The term “gateway” is used in this document.

S button – The Z-Wave® Service button, which is located on Z-Wave® devices and is used for various functions such as inclusion (adding), exclusion (removing), and resetting the device to its factory default settings. The term “S button” is used in this document.

Device – In this document, the term “Device” is used to refer to the Shelly Qubino device that is a subject of this guide.

ABOUT SHELLY QUBINO

Shelly Qubino is a line of innovative microprocessor-managed devices, which allow remote control of electric circuits with a smartphone, tablet, PC, or home automation system. They work on Z-Wave® wireless

communication protocol, using a gateway, which is required for a configuration of devices. When the gate-way is connected to the internet, you can control Shelly Qubino devices remotely from anywhere. Shelly Qubino devices can be operated in any Z-Wave® network with other Z-Wave® certified devices from other manufacturers. All mains operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network. Devices are designed to work with older generations of Z-Wave® devices and gateways.

ABOUT THE DEVICE

The Device is a single product that enables control of the on/off function for one electrical appliance, such as a bulb, ceiling fan, or IR heater. It measures power consumption of the con-nected appliance. The Device is compatible with push-buttons and switches (default).

INSTALLATION INSTRUCTIONS

The Device can control a various type of loads (e.g., bulbs) in one electrical circuit. It can be retrofitted into standard elec-trical wall boxes, behind power sockets and light switches or other places with limited space.

- ⚠ CAUTION! Danger of electrocution. Mounting/installation of the Device to the power grid has to be performed with caution, by a qualified electrician.
- ⚠ WARNING! Danger of electrocution. Every change in the connections has to be done after ensuring there is no voltage present at the Device terminals.
- ⚠ CAUTION! Use the Device only with a power grid and appli-ances that comply with all applicable regulations. A short cir-cuit in the power grid or any appliance connected to the Device may damage it.
- ⚠ CAUTION! Do not connect the Device to appliances exceed-ing the given max. load!
- ⚠ CAUTION! Do not shorten the antenna.
- ⚠ RECOMMENDATION: Place the antenna as far away as possible from metal elements as they can cause signal inter-ference.
- ⚠ CAUTION! Connect the Device only in the way shown in these instructions. Any other method could cause damage and/or injury.
- ⚠ CAUTION! Do not install the Device where it can get wet.
- ⚠ CAUTION! Do not use the Device if it has been damaged!
- ⚠ CAUTION! Do not attempt to service or repair the Device yourself!
- ⚠ RECOMMENDATION: Connect the Device using solid sin-gle-core wires with increased insulation heat resistance not less than PVC T105°C (221°F).



- CAUTION! Before starting the mounting/installation of the Device, check that the breakers are turned off and there is no voltage on their terminals. This can be done with a phase tester or multimeter. When you are sure that there is no voltage, you can proceed to connecting the wires.

If you are using AC power supply connect the load to the O terminal of the Device and the Neutral wire, as shown on Fig. 1. Connect the Live wire to an L terminal of the Device. Connect the Neutral wire to a N terminal of the Device. Connect a switch or a push-button to the Device SW terminal and any of the un-used L terminals of the Device.

- ⚠ CAUTION! Use only one phase AC circuit. Do not use mixed AC and DC circuits.
- ⚠ RECOMMENDATION: For inductive appliances that cause voltage spikes during switching on/off, such as electrical motors, fans, vacuum cleaners and similar ones, RC snubber (0.1 μ F / 100 Ω / 1/2 W / 600 VAC) should be connected parallel to the appliance.
- CAUTION! Do not allow children to play with the push-buttons/ switches connected to the Device. Keep the devices for remote control of Shelly Qubino (mobile phones, tablets, PCs) away from children.

LEGEND

Device terminals:

- N: Neutral terminal
- L: Live terminal (110–240 V AC)
- SW: Switch/push-button input terminal (controlling O)
- O: Load circuit output terminal

Wires:

- N: Neutral wire
- L: Live wire (110-240 V AC)

Buttons:

- S: S button (Fig.2)

Wave 1PM

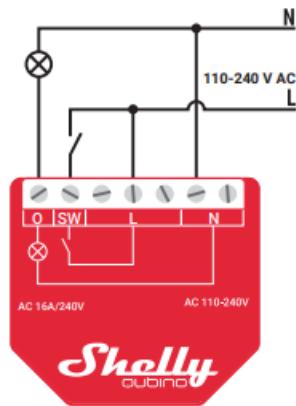


Fig. 1

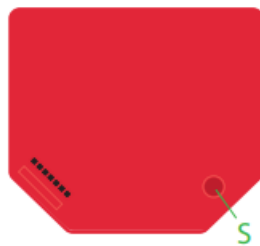


Fig. 2

EXTENDED USER GUIDE

For more detailed installation instructions, use cases, and comprehensive guidance on adding/removing the Device to/from a Z-Wave network, factory reset, LED signalization, Z-Wave command classes, parameters, and much more, refer to the extended user guide at:

<https://shelly.link/Wave1PM-KB-ANZ>



SPECIFICATIONS

OPERATIONAL INSTRUCTIONS

If the SW is configured as a switch (default), each toggle of the switch will change the output O state to the opposite state – on, off, on, etc.

If the SW is configured as a push-button in the Device settings, each press of the push-button will change the output O state to the opposite state – on, off, on, etc.

SUPPORTED LOAD TYPES

- Resistive (incandescent bulbs, heating devices)
- Capacitive (capacitor banks, electronic equipment, motor start capacitors)
- Inductive with RC Snubber (LED light drivers, transformers, fans, refrigerators, air-conditioners)

IMPORTANT DISCLAIMER

Z-Wave® wireless communication may not always be 100% reliable. This Device should not be used in situations in which life and/or valuables are solely dependent on its functioning. If the Device is not recognized by your gateway or appears incorrectly, you may need to change the Device type manually and ensure that your gateway supports Z-Wave Plus® multi-channel devices.

ORDERING CODE: QNSW-001P16AU

MANUFACTURER: Shelly Europe Ltd.

Address: 103 Cherni vrah Blvd., 1407 Sofia, Bulgaria

Tel.: +359 2 988 7435

E-mail: zwave-shelly@shelly.cloud

Support: <https://support.shelly.cloud/>

Web: <https://www.shelly.com>

Changes in the contact data are published by the Manufacturer at the official website: <https://www.shelly.com>

Documents / Resources



[Shelly Qubino QNSW-001P16AU Z-Wave Smart Switch with Power](#) [pdf] User Guide
QNSW-001P16AU Z-Wave Smart Switch with Power, QNSW-001P16AU, Z-Wave Smart Switch with Power, Smart Switch with Power, Switch with Power

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.