



Shelly Pro 1 Smart Din Rail Relay Switch User Manual

[Home](#) » [Shelly](#) » Shelly Pro 1 Smart Din Rail Relay Switch User Manual 

Contents

- [1 Shelly Pro 1 Smart Din Rail Relay Switch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Main changes](#)
- [5 Short description](#)
- [6 Main applications](#)
- [7 Simplified internal schematics \(≠\)](#)
- [8 Device electrical interfaces](#)
- [9 Safety features](#)
- [10 User interface](#)
- [11 Specifications \(≠\)](#)
- [12 Basic wiring diagram \(≠\)](#)
- [13 Troubleshooting](#)
- [14 Documents / Resources](#)
 - [14.1 References](#)
- [15 Related Posts](#)



Shelly Pro 1 Smart Din Rail Relay Switch



Product Information

Specifications

- Power supply: No more 12 VDC option
- Relay: No more DC switching
- Connectors: 3-terminal connectors replaced by 2-terminal ones
- PCBs: Relay 2-layer PCBs replaced by 4-layer ones for better thermal performance
- LAN: Improved high voltage electrical distances
- Plastics shell: Improved dielectric performance

Description

Shelly Pro 1 v.1 is a DIN rail mountable smart switch with potential-free contacts. It offers gen2 firmware flexibility, LAN connectivity, and various options for professional integrators and end customers. It can operate in a local Wi-Fi network or via cloud home automation services.

Main Applications

- Residential
- MDU (Multi Dwelling Units)
- Light commercial

- Industrial
- Government/municipal
- University/college

Integrations

- Google
- Alexa
- Samsung SmartThings

Device Electrical Interfaces

Inputs

- 2 switch/button inputs on screw terminals: SW1 and SW2
- 2 power supply inputs on screw terminals: 1 N and 1 L
- 1 relay input: I

Outputs:

- 1 relay output: O

Connectivity

- Wi-Fi
- Ethernet
- Bluetooth

Safety Features

Overheating protection

Supported Load Types

- Resistive (incandescent bulbs, heating devices)
- Capacitive (capacitor banks, electronic equipment, motor start capacitors)
- Inductive with RC Snubber (LED light drivers, transformers, fans, refrigerators, air conditioners)

User Interface

Inputs

- One tactile dome button
- Press and hold 5 sec to reboot
- Press and hold 10 sec to factory reset

Product Usage Instructions

Frequently Asked Questions (FAQ)

Q: Can Shelly Pro 1 v.1 be used in industrial applications?

A: Yes, Shelly Pro 1 v.1 is suitable for industrial settings such as factories, power plants, water processing, and refineries.

27/08/2024, 13:42

Shelly Pro 1 v.1

Knowledge Base / Devices / Shelly Pro devices / Shelly Pro 1

Shelly Pro 1 v.1



Shelly Pro 1 v.1 is a modification of Shelly Pro 1 (SPSW-001XE16EU)

Shelly Pro 1 v.0 is now obsolete and out of sale.

Download Shelly Pro 1 multi-language printed user manual.

Differences with Shelly Pro 1 v.0 are marked by the ≠ symbol in the text below.

Main changes

- Power supply: no more 12 VDC option.
- Relay: no more DC switching
- Connectors: 3-terminal connectors are replaced by 2-terminal ones.
- PCBs: relay 2-layer PCBs are replaced by 4-layer ones for better thermal performance. LAN: improved high voltage electrical distances.
- Plastics shell: improved dielectric performance.

Device identification (≠)

- Device name: Shelly Pro 1 v.1
- Device model: SPSW-201XE16EU

- Device SSID: ShellyPro1-XXXXXX

Short description

Shelly Pro 1 is a DIN rail mountable smart switch with potential-free contacts. Enhanced with all the gen2 firmware flexibility and LAN connectivity, it provides professional integrators with many more options for end customer solutions. It can work standalone in a local Wi-Fi network or it can also be operated through cloud home automation services.

Shelly Pro 1 can be accessed, controlled and monitored remotely from any place where the User has internet connectivity, as long as the device is connected to a Wi-Fi router and the Internet.

Shelly Pro 1 has an embedded Web Interface which can be used to monitor and control the device, as well as adjust its settings.


Main applications

- Residential
- MDU (Multi Dwelling Units – apartments, condominiums, hotels, etc.)
- Light commercial (small office buildings, small retail/restaurant/gas station, etc.)
- Industrial (factories, power plants, water processing, refineries, etc.)
- Government/municipal
- University/college

Integrations

- Google
- Alexa
- Samsung SmartThings

Simplified internal schematics (≠)

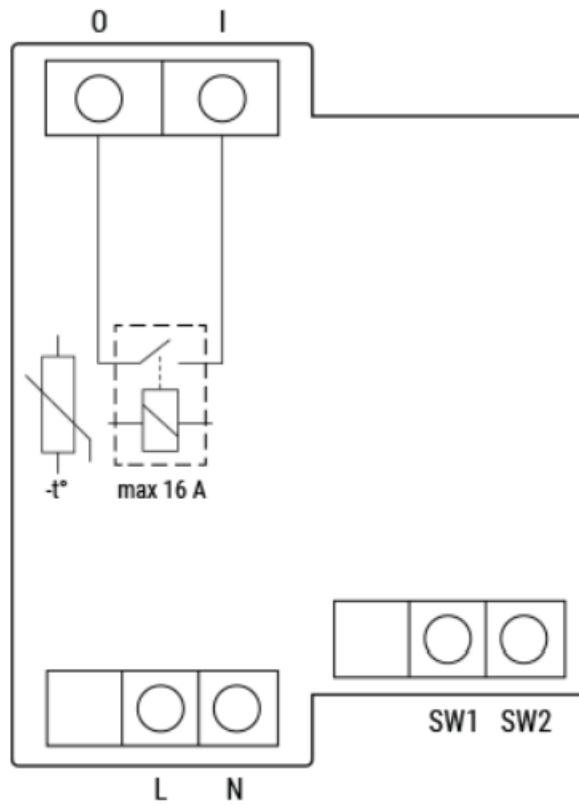

Device electrical interfaces

Inputs

- 2 switch/button inputs on screw terminals: SW1 and SW2
- 2 power supply inputs on screw terminals: 1 N and 1 L
- 1 relay input: I

Outputs

1 relay output: O


Ethernet port

1 RJ45 connector

CAUTION! Plug in or unplug the LAN cable only when the Device is powered off! The LAN cable connector must not be metallic in the parts touched by the user to plug in or unplug the cable.

Add-on interface

Shelly proprietary serial interface

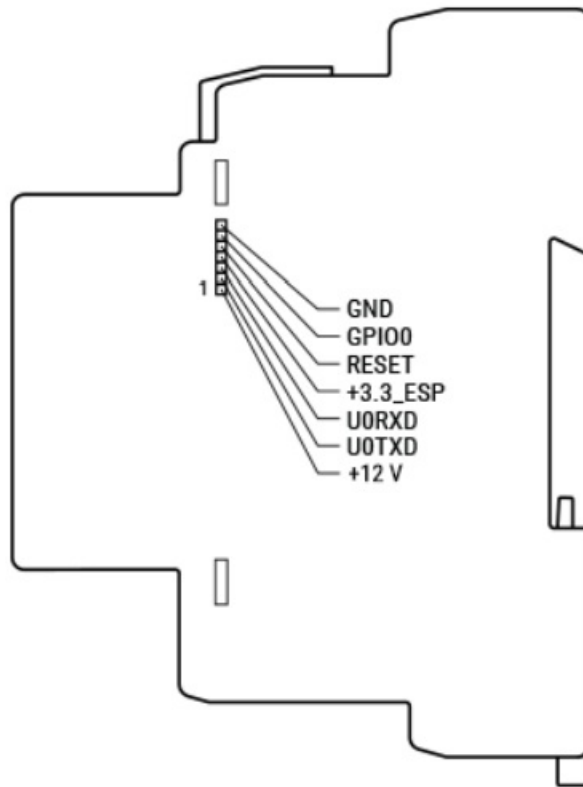

CAUTION! High voltage on the add-on interface when the Device is powered!

Connectivity

- Wi-Fi
- Ethernet
- Bluetooth

Safety features

Overheating protection

Supported load types

- Resistive (incandescent bulbs, heating devices)
- Capacitive (capacitor banks, electronic equipment, motor start capacitors)
- Inductive with RC Snubber (LED light drivers, transformers, fans, refrigerators, air-conditioners)

User interface

Inputs

- One tactile dome button
 - Press and hold 5 sec to reboot.
 - Press and hold 10 sec to factory reset.

Outputs

- LED indication
 - Power (red): Red light indicator will be on if power supply is connected.

Wi-Fi (varies):

- Blue light indicator will be on if in AP mode.
- Red light indicator will be on if in STA mode and not connected to a Wi-Fi network.
- Yellow light indicator will be on if in STA mode and connected to a Wi-Fi network. Not connected to Shelly Cloud or Shelly Cloud disabled.
- Green light indicator will be on if in STA mode and connected to a Wi-Fi network and to the Shelly Cloud.
- The light indicator will be flashing Red/Blue if OTA update is in progress.
- LAN (green): Green light indicator will be on if LAN is connected.
- Out (red): Red light indicator will be on if the Output relay is closed.


Specifications (≠)

Type	Value
Physical	
Size (HxWxD):	94x19x69 ±0.5 mm / 3.70x0.75x2.71 ±0.02 in
Weight:	63 g / 2.22 oz.
Mounting:	DIN rail
Screw terminals max torque:	0.4 Nm / 3.54 lbin
Conductor cross section:	0.5 to 2.5 mm² / 20 to 14 AWG (green connector) 0.5 to 1.5 mm² / 20 to 16 AWG (blue connectors)
Conductor stripped length:	6 to 7 mm / 0.24 to 0.28 in (green connector) 5 to 6 mm / 0.20 to 0.24 in (blue connectors)
Shell material:	Plastic
Color:	Blue

Environmental	
Ambient temperature:	-20 °C to 40 °C / -5 °F to 105 °F
Humidity	30 % to 70 % RH
Max. altitude	2000 m / 6562 ft
Electrical	
Power supply voltage AC:	110 - 240 V
Power supply voltage DC:	N/A
Power consumption:	< 3 W
Neutral not needed:	No
Output circuits ratings	
Max switching voltage AC:	240 V
Max switching voltage DC:	N/A
Max switching current AC:	16 A
Max switching current DC:	N/A
Sensors, meters	
Internal-temperature sensor:	Yes
Radio	
RF band:	2400 - 2495 MHz
Max. RF power:	<20 dBm
Wi-Fi protocol:	802.11 b/g/n

Wi-Fi Range:	Up to 30 m / 100 ft indoors and 50 m / 160 ft outdoors (Depends on local conditions)
Bluetooth Protocol:	4.2
Bluetooth Range:	Up to 10 m / 33 ft indoors and 30 m / 100 ft outdoors (Depends on local conditions)
MCU	
CPU:	ESP32-D0WDQ6
Flash:	8 MB
Firmware capabilities	
Schedules:	20
Webhooks (URL actions):	20 with 5 URLs per hook
Scripting:	Yes
MQTT:	Yes
CoAP:	No

Basic wiring diagram (✗)

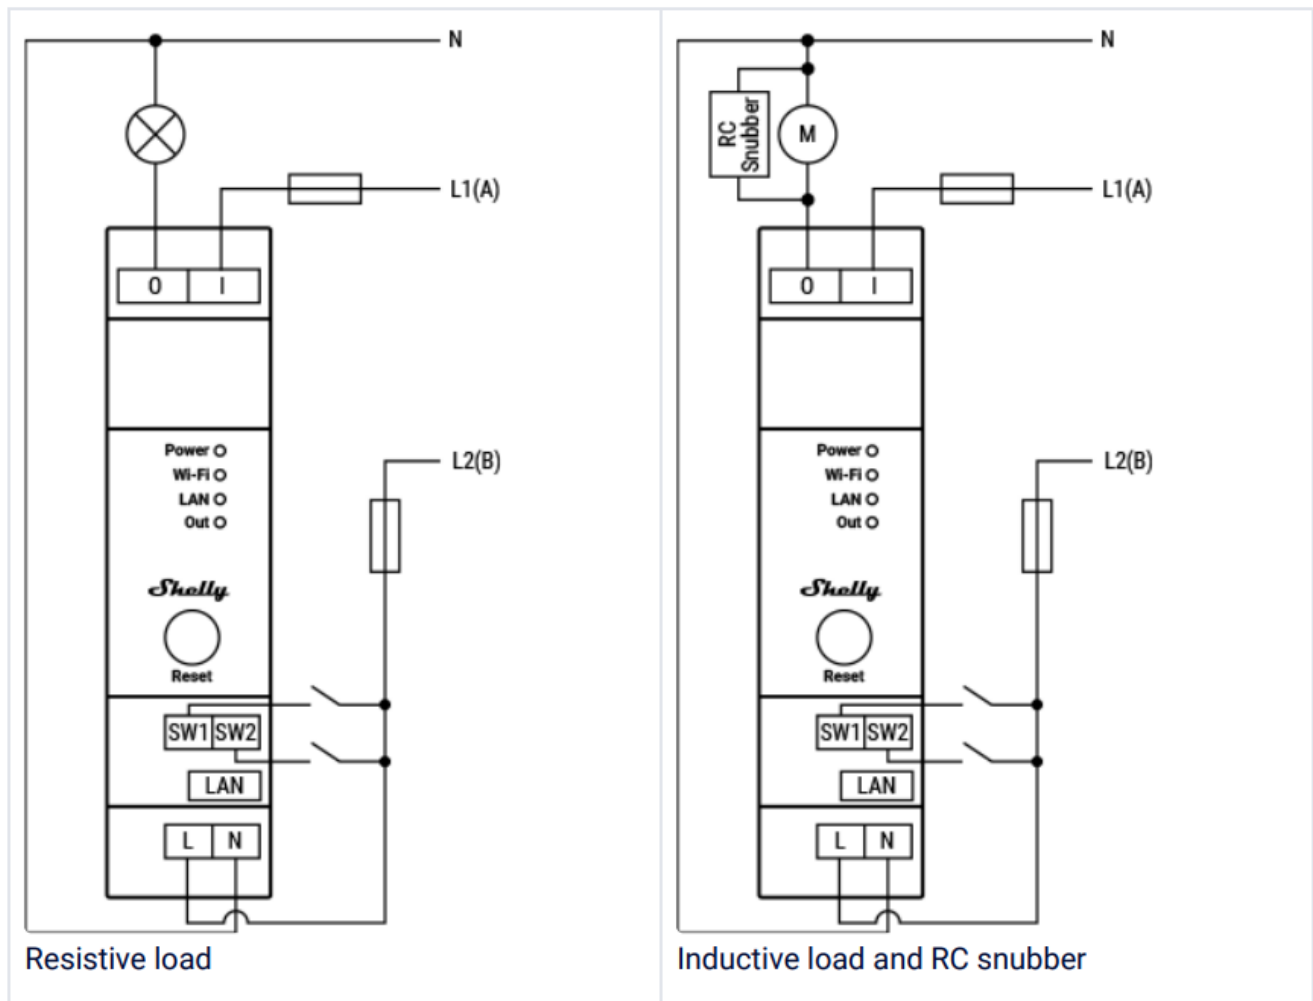

Legend

Terminals		Wires	
I	Load circuit input terminal	L1(A)	Load circuit live (110-240 V) wire
O	Load circuit output terminal	L2(B)	Device power supply live (110-240 V) wire
SW1, SW2	Switch/button input terminals	N	Neutral wire
L	Live (110-240 V) terminal		

Terminals		Wires	
N	Neutral terminal		
LAN	Local Area Network RJ 45 connector		

Troubleshooting

- Web Interface guide
- Read the Shelly Pro 1 web interface guide

Components and APIs

- This device
- All Shelly devices and services

Printed user guide

Shelly Pro 1 multilingual printed user and safety guide.pdf

Compliance

- Shelly Pro 1 multilingual EU declaration of conformity.pdf
- Shelly Pro 1 UK PSTI ACT Statement of compliance.pdf

Installation guides


- Using Shelly Pro 1/1PM V1 with multiple switches to control lights
- Using Shelly Pro 1/1PM V1 with multiple buttons to control lights
- Using Shelly Pro 1 V1 and a contactor for load shedding

Privacy policy / Cookie policy / Support / FB community support / Contact us

Copyright © 2024 Shelly Cloud. Allterco Robotics OOD • Powered by Scroll Viewport & Atlassian Confluence •
Reset cookie settings

<https://kb.shelly.cloud/knowledge-base/shelly-pro-1-v1>

Documents / Resources

	<p>Shelly Pro 1 Smart Din Rail Relay Switch [pdf] User Manual</p> <p>Pro 1 Smart Din Rail Relay Switch, Smart Din Rail Relay Switch, Rail Relay Switch, Relay Switch, Switch</p>
---	---

References

- [🇬🇧 Welcome to Shelly Knowledge Base!](#)
- [🇬🇧 Devices](#)
- [🇬🇧 Shelly Pro 1](#)
- [🇬🇧 Shelly Pro 1 web interface guide](#)
- [🇬🇧 Shelly Pro devices](#)
- [🇬🇧 Using Shelly Pro 1/1PM V1 with multiple switches to control lights](#)
- [🇬🇧 Using Shelly Pro 1 V1 and a contactor for load shedding](#)
- [🇬🇧 Using Shelly Pro 1/1PM V1 with multiple buttons to control lights](#)
- [🔗 Welcome to Shelly Technical Documentation | Shelly Technical Documentation](#)
- [🔗 Shelly Pro 1 | Shelly Technical Documentation](#)
- [📌 Confluence | Your Remote-Friendly Team Workspace | Atlassian](#)
- [📄 Scroll Apps for Confluence](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.