



# Shelly I4DC 4 Digital Inputs Controller Shelly Plus User Guide


[Home](#) » [Shelly](#) » Shelly I4DC 4 Digital Inputs Controller Shelly Plus User Guide 

## Contents

- [1 Shelly I4DC 4 Digital Inputs Controller Shelly Plus](#)
- [2 Product Information](#)
- [3 Product Introduction](#)
- [4 Installation Instructions](#)
- [5 Troubleshooting](#)
- [6 Initial Inclusion](#)
- [7 Specifications](#)
- [8 Declaration of Conformity](#)
- [9 Product Introduction](#)
- [10 Schematics](#)
- [11 Installation Instructions](#)
- [12 Troubleshooting](#)
- [13 Initial Inclusion](#)
- [14 Specifications](#)
- [15 Declaration of conformity](#)
- [16 Documents / Resources](#)
  - [16.1 References](#)
- [17 Related Posts](#)



## Shelby I4DC 4 Digital Inputs Controller Shelly Plus

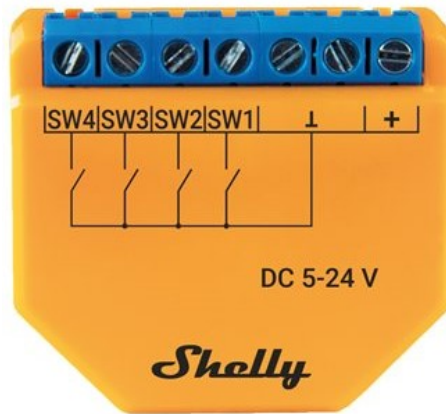

### Product Information

The Shelly Plus I4DC is a 4 digital inputs controller that allows you to connect switches or buttons to control various devices. It provides important technical and safety information about the device's installation and usage. Please read this guide and any accompanying documents carefully before starting the installation to ensure proper functioning and avoid any potential hazards.

### Product Introduction

The Shelly Plus I4DC features a serial interface, reset button, and schematic diagrams for easy installation and configuration.

### Installation Instructions

Before installing the device, please follow these instructions:

- Connect a switch or a button to the SW terminal of the Device.
- Connect the Negative wire as shown in fig. 1.
- Connect the Positive wire to the + terminal of the Device.
- Avoid inserting multiple wires in a single terminal.
- Ensure that the device is not installed in a location where it can get wet.

**Note:** Failure to follow the installation procedures may result in malfunction, potential danger, violation of law, or refusal of legal and/or commercial guarantee. Allterco Robotics EOOD is not responsible for any loss or damage caused by incorrect installation or improper operation due to failure to follow the user and safety instructions in this guide.

### Troubleshooting

If you encounter any problems with the installation or operation of the Shelly Plus I4DC, please refer to the knowledge base page at <https://kb.shelly.cloud/knowledge-base/shelly-plus-i4dc> for assistance.

### Initial Inclusion

Instructions for the initial inclusion of the device are not provided in the given text.

## Specifications

Technical specifications for the Shelly Plus I4DC are not provided in the given text.


## Declaration of Conformity

A declaration of conformity for the Shelly Plus I4DC is not provided in the given text.

### Read before use

This document contains important technical and safety information about the device, its safety use and installation.

**CAUTION!** Before beginning the installation, please read carefully and entirely this guide and any other documents accompanying the device. Failure to follow the installation procedures could lead to malfunction, danger to your health and life, violation of law or refusal of legal and/or commercial guarantee (if any). Allterco Robotics EOOD is not responsible for any loss or damage in case of incorrect installation or improper operation of this device due to failure of following the user and safety instructions in this guide.

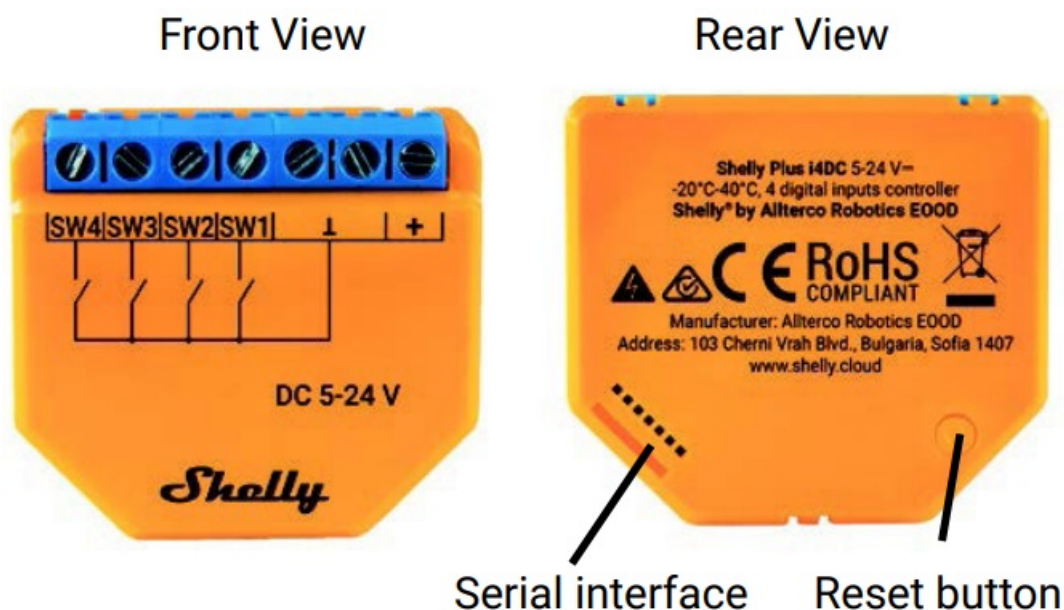


## Product Introduction

- Shelly® is a line of innovative microprocessor-managed devices, which allow remote control of electric circuits through a mobile phone, tablet, PC, or home automation system. Shelly® devices can work standalone in a local Wi-Fi network or they can also be operated through cloud home automation services. Shelly Cloud is a service that can be accessed using either Android or iOS mobile application, or with any internet browser at <https://home.shelly.cloud/>.
- Shelly® devices can be accessed, controlled and monitored remotely from any place where the user has internet connectivity, as long as the devices are connected to a Wi-Fi router and the Internet. Shelly® devices have Embedded Web Interface accessible at <http://192.168.33.1> when connected directly to the device access point, or at the device IP address on the local Wi-Fi network. The embedded Web Interface can be used to monitor and control the device, as well as adjust its settings.
- Shelly® devices can communicate directly with other Wi-Fi devices through HTTP protocol. An API is provided by Allterco Robotics EOOD. For more information, please visit: <https://shelly-api-docs.shelly.cloud/#shelly-family-overview>.

- Shelly® devices are delivered with factory-installed firmware. If firmware updates are necessary to keep the devices in conformity, including security updates, Allterco Robotics EOOD will provide the updates free of charge through the device Embedded Web Interface or the Shelly mobile application, where the information about the current firmware version is available. The choice to install or not the device firmware updates is the user's sole responsibility. Allterco Robotics EOOD shall not be liable for any lack of conformity of the device caused by failure of the user to install the provided updates in a timely manner.

## Schematics

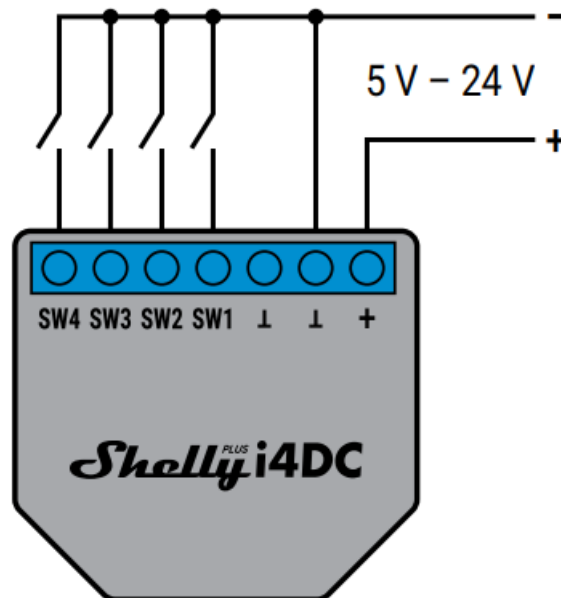

**fig. 1**

## Legend

- +: Positive terminal / wire
- $\perp$  : Negative terminal
- -: Negative wire
- **SW1, SW2, SW3, SW4**: Switch terminals

## Installation Instructions

Shelly Plus i4DC (the Device) is a DC powered Wi-Fi switch input designed to control other devices over the Internet. It can be retrofitted into a standard in-wall console, behind light switches or other places with limited space.

- **CAUTION!** Mounting/installation of the Device has to be performed with caution, by a qualified electrician.
- **CAUTION!** Danger of electrocution. Make sure the voltage at the wires is not higher than 24 VDC. Use only stabilized voltage to power supply the Device.
- **CAUTION!** Every change in the connections has to be done after ensuring there is no voltage present at the Device terminals.
- **CAUTION!** Use the Device only with a power grid and appliances which comply with all applicable regulations. A short circuit in the power grid or any appliance connected to the Device may damage it.

- **CAUTION!** Connect the Device only in the way shown in these instructions. Any other method could cause damage and/or injury.
- **CAUTION!** Do not install the Device where it can get wet. Connect a switch or a button to a SW terminal of the Device and the Negative wire as shown on fig. 1. Connect the Negative wire to a terminal and the Positive wire to the + terminal of the Device.
- **CAUTION!** Do not insert multiple wires in a single terminal.

## Troubleshooting

In case you encounter problems with the installation or operation of Shelly Plus i4DC, please check its knowledge base page: <https://kb.shelly.cloud/knowledge-base/shelly-plus-i4dc>

## Initial Inclusion

- If you choose to use the Device with the Shelly Cloud mobile application and Shelly Cloud service, instructions on how to connect the Device to the Cloud and control it through the Shelly App can be found in the “App Guide”. <https://shelly.link/app>
  - The Shelly mobile application and Shelly Cloud service are not not conditions for the Device to function properly. This
  - Device can be used standalone or with various other home automation platforms and protocols.
- CAUTION!** Do not allow children to play with the buttons/ switches connected to the Device. Keep the devices for remote control of Shelly (mobile phones, tablets, PCs) away from children.

## Specifications

- **Power supply:** 5 – 24 VDC (stabilized)
- **Dimensions (HxWxD):** 42x37x17 mm
- **Working temperature:** -20°C to 40°C
- **Max altitude:** 2000 m
- **Electrical consumption:** < 1 W
- **Multi-click support:** Up to 12 possible actions (3 per button)
- **Wi-Fi:** Yes
- **Bluetooth:** Yes
- **RF band:** 2400 – 2495 MHz
- **Max. RF power:** < 20 dBm
- **Wi-Fi protocol:** 802.11 b/g/n
- **Wi-Fi operational range (depending on local conditions):**
  - up to 50 m outdoors
  - up to 30 m indoors
- **Bluetooth protocol:** 4.2
- **Bluetooth operational range (depending on local conditions):**
  - up to 30 m outdoors
  - up to 10 m indoors
- **Scripting (mjs):** Yes

- **MQTT:** Yes
- **Webhooks** (URL actions): 20 with 5 URLs per hook
- **CPU:** ESP32
- **Flash:** 4 MB

## Declaration of conformity

Hereby, Allterco Robotics EOOD declares that the radio equipment type Shelly Plus i4DC in compliance with Directive 2014/53/EU, 2014/35/EU, 2014/30/EU, 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address: [https://shelly.link/Plus-i4DC\\_DoC](https://shelly.link/Plus-i4DC_DoC)

- **Manufacturer:** Allterco Robotics EOOD
- **Address:** 103 Cherni vrah Blvd., 1407 Sofia, Bulgaria
- **Tel.:** +359 2 988 7435
- **E-mail:** [support@shelly.cloud](mailto:support@shelly.cloud)
- **Official website:** <https://www.shelly.cloud>
- Changes in the contact information data are published by the
- Manufacturer on the official website. <https://www.shelly.cloud>
- All rights to the trademark Shelly® and other intellectual rights associated with this Device belong to Allterco Robotics EOOD.

## Documents / Resources



[Shelly i4DC 4 Digital Inputs Controller Shelly Plus](#) [pdf] User Guide  
I4DC 4 Digital Inputs Controller Shelly Plus, I4DC 4, Digital Inputs Controller Shelly Plus, Inputs Controller Shelly Plus, Controller Shelly Plus, Shelly Plus

## References

- [🌐 Shelly Home](#)
- [🇬🇧 Shelly Plus i4DC](#)
- [🔗 Welcome to Shelly Technical Documentation | Shelly Technical Documentation](#)
- [🔗 Shelly Plus i4DC](#)