



Home » Shenzhen Technology » Shenzhen Technology K5EM Standalone Keypad Access Control User Manual 📆

Contents [hide]

- 1 Shenzhen Technology K5EM Standalone Keypad Access Control
- 2 Product Usage Instructions
- 3 Packing List
- 4 Description
- 5 Features
- 6 Specifications
- 7 Installation
- 8 Wiring
- 9 Master Card Operation
- 10 Sound and Light indication
- 11 Detailed Programming Guide
- 12 FCC STATEMENT
- 13 FAQ
- 14 Documents / Resources
 - 14.1 References



Shenzhen Technology K5EM Standalone Keypad Access Control



Product Usage Instructions

- Before using the reader for the first time, make sure to fully charge it using the provided charger. Connect the charger to the device and a power source.
- To turn on the reader, press and hold the power button until the screen lights up. To turn it off, press and hold the power button again and follow the on-screen prompts.
- Use the touch screen to navigate through your documents. Swipe left or right to turn pages, and pinch to zoom in or out for better readability.
- You can transfer files to the reader using a USB cable connected to your computer.
 Simply drag and drop your files into the designated folder on the device.
- Explore the settings menu to customize your reading experience. You can adjust brightness, font size, and other display settings to suit your preferences.

Packing List

Name	Quantity	Remarks
Keypad	1	
User manual		
Screw driver	1	< P20 mm x 60 mm, Special for keypad
Rubber plug	2	< P6 mm x 30 mm, used for fixing
Self tapping screws	2	¢ 4 mm x 28 mm, used for fixing

Star screws	< P3 mm x 6 mm, used for fixing

Please ensure that all the above contents are correct. If any are missing, please notify the supplier of the unit.

Quick Reference Programming Guide

To enter the programming mode	* Master code # 999999 is the default factory master code
To exit from the programming mod	*
Note that to undertake the following	programming the master user must be logged in
To change the master code	0 New code # New code # The master code can be 6 to 8 digits
To add a PIN user.	1 User ID number # PIN # The ID number is any number between 1 & 2000. The PIN is any four digits between 0000 & 9999 with the exception of 1234 which is reserved. Users can be added continuously without exiting programming mode
To add a card user	1 Read Card # Cards can be added continuously without exiting programming mode
To delete a PIN or a card user.	2 User ID number # for a PIN user or 2 Read Card # for a card user Users can be deleted continuously without exiting programming mode
To unlock the door for a PIN user	Enter the PIN then press #
To unlock the door for a card user	Present the card

Description

The unit is a single-door multifunction standalone access controller or a Wiegand output keypad, or a card reader. It is suitable for mounting either indoors or outdoors in harsh environments. It is housed in a strong, sturdy, and vandal-proof Zinc Alloy electroplated case, which is available in either a bright silver or matt silver finish. The electronics are

fully potted, so the unit is waterproof and conforms to IP68. This unit supports up to 2000 users in either a Card, 4-digit PIN, or a Card + PIN option. The built-in card reader supports 125 KHz EM cards. The unit has many extra features, including lock output current short circuit protection, Wiegand output, and a backlit keypad. These features make the unit an ideal choice for door access, not only for small shops and domestic households but also for commercial and industrial applications such as factories, warehouses, laboratories, banks, and prisons.

Features


- Waterproof, conforms to IP65/IP68
- Strong Zinc Alloy Electroplated anti-vandal case
- Full programming from the keypad
- 2000 users, supports Card, PIN, Card + PIN
- Can be used as a standalone keypad
- Backlight keys
- Master add card/delete card support
- Wiegand 26 input for connection to external reader
- Wiegand 26 output for connection to a controller
- Adjustable Door Output time, Alarm time, Door Open time
- Very low power consumption (30mA)
- Fast operating speed, <20ms with 2000 users
- Lock output current short circuit protection
- Easy to install and programme
- Built-in buzzer
- Red, Yellow, and Green LEDS display the working status

Specifications

Operating Voltage	DC 12V±10%
User Capacity	2000
Card Reading Distance	3-6 cm
Active Current	<60mA
Idle Current	25±5 mA
Lock Output Load	Max 3A
Operating Temperature	-45℃~60℃
Operating Humidity	10%- 90% RH
Waterproof	Conforms to IP68
Adjustable Door Relay time	0 -99 seconds
Wiegand Interface	Wiegand 26 bit
Wiring Connections	Electric Lock, Exit Button, External Alarm, External reader

Installation


- Remove the back cover from the keypad using the supplied special screw driver
- Drill 2 holes on the wall for the self tapping screws and dig a hole for the cable
- Put the supplied rubber bungs into the two holes
- Fix the back cover firmly on the wall with 2 self tapping screws
- Thread the cable through the cable hole
- Attach the keypad to the back cover.

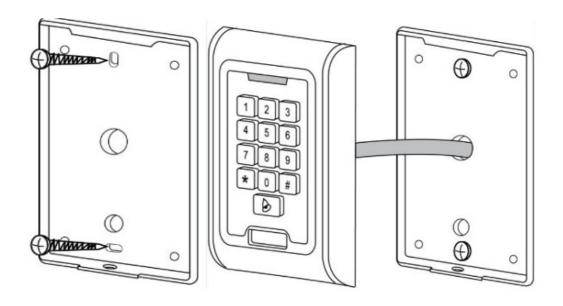


Wiring

Colour	Function	Description
Pink	BELL_A	Doorbell button one end (optional)
Pale blue	BELL_B	Doorbell button to the other end (optional)
Green	D0	WG output D0
White	D1	WG output D1
Yellow	OPEN	Exit button one end(the other end connected GND)
Red	12V+	12V + DC Regulated Power Input
Black	GND	12V - DC Regulated Power Input
Blue	NO	Relay normally-on end(Connect positive electric lock "-")
Purple	COM	Relay Public end, connect GND
Orange	NC	Relay Closed end(connect negative electric lock "-")

Common power supply diagram:

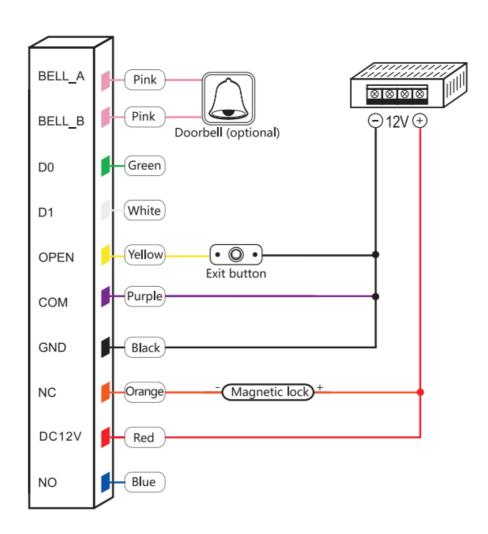

Special power supply diagram:

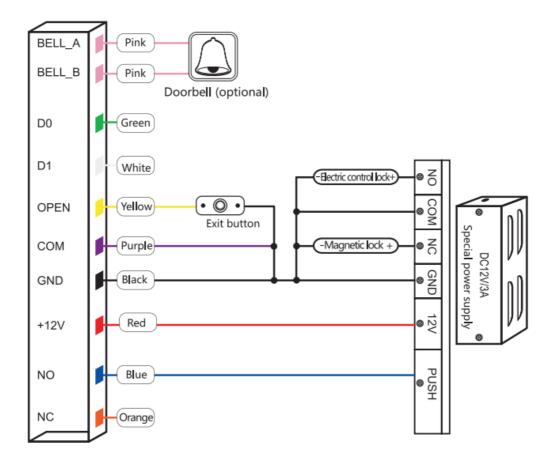

To Reset to Factory Default and Match the Master Card

Reset to Factory Default

Method 1: Power off, power on, when the indicator light turns orange, press the # key, swipe the first card as for master add card, swipe the second card as for maste, delete card, on hearing tick Tick-tick sound thrice, the master code has been reset to 999999, factory default settings are successful.

Method 2: Power off, press the exit button continuously, power on, sound "tick-tick" twice, then Release the hand, the indicator light turns orange, if you need to register master cards, pls swipe the first card as for master add card, swipe the second card as for master, delete card within 10s, if not, sound "tick-" once after 10s, the master code has been reset to 999999, factory default settings is successful.

* Registered user data won't be deleted when reset to factory default.

Master Card Operation

Add Card

Read master add card	Read the	1st user	card	Read th	e 2nd	user	card
Read master add card							

Note: The master add card is used to add card users continuously and quickly. When you read the master add card for the first time, you will hear a short "BEEP" sound once, and the indicator light turns orange, which means you have entered the add user programming. When you read the master adda card for the second time, you will hear a long "BEEP" sound once, and the indicator light turns on Red, which means you have exited the add user programming.

Delete Card

Read master delete card Read the 1st user card Read the 2nd user card...

Note: The master delete card is used to delete card users continuously and quickly. When you read the master delete card for the first time, you will hear a short "BEEP" sound once, and then the indicator light turns orange, it means you have entered delete user programming. When you read the master delete card for the second time, you will hear a long "BEEP" sound once, then the indicator light turns red, it means you have exited the delete user programming.

Sound and Light indication

Operation Status	Red Light	Green Lig	Yellow Lig	Buzzer
Power on		Bright		Di
Stand by	Bright			
Press keypad				Di
Operation successful		Bright		Di
Operation failed				DiDiDi

Enter programming mode	Bright			
In the programming mode			Bright	Di
Exit from the programming mo	Bright			Di
Open the door		Bright		Di
Alarm	Bright			Alarm

Detailed Programming Guide

User Settings

To enter the programming mode	* Master code # 999999 is the default factory master code
To exit from the programming mode	*
Note that to undertake the following pr	rogramming the master user must be logged in
To change the master code	0 New code # New code # The master code can be 6 to 8 digits
Setting the working mode: Set valid card only users Set valid card and PIN users Set valid card or PIN users	3 0 # Entry is by card only 3 1 # Entry is by card and PIN together 3 2 # Entry is by either card or PIN (default)
To add a user in either card or PIN mod	le, i.e. in the 3 2 # mode. (Default settings)
To add a Pin user	1 User ID number # PIN # The ID number is any number between 1 & 2000. The PIN is any four digits between 0000 & 9999 with the exception of 1234 which is reserved. Users can be added continuously without exiting programming mode as follows: 1 User ID no 1 # PIN # User ID no 2 # PIN #
To delete a PIN user	2 User ID number # Users can be deleted continuously without exiting programming mode
To change the PIN of a PIN user (This step must be done out of programming mode)	* ID number # Old PIN # New PIN # New PIN #
To add a card user (Method 1) This is the fastest way to enter cards, user ID number auto generation.	1 Read card # Cards can be added continuously without exiting programming mode


1	To add a card user (Method 2) This is the alternative way to enter cards using User ID Allocation. In this method a User ID is allocated to a card. Only one user ID can be allocated to a single card.	ID number # Read card # User can be added continuously without exitin programming mode			
	To add a card user (Method 3) Card number is the last 8 digits printed on the back of the card,user ID number auto generation	Card number (8 digits or 10 digits) # User can be added continuously without exiting programming mode			
	To add a card user (Method 4) In this method a User ID is allocated to a card number. Only one user ID can be allocated to the card number	ID number.# Card number (8 digits or 10 digits). # User can be added continuously without exitin programming mode			
	To delete a card user by card. Note users can be deleted continuously without exiting programming mode	2 Read Card #			
	To delete a card user by user ID. This option can be used when a user has lost their card	2 User ID #			
	To delete a card user by card number. This option can be used when the user want to make the change but the card has lost	[2] Card number (8 digits or 10 digits) [#] Note users can be deleted continuously without exiting programming mode			
	To add a card and PIN user in card and PIN mode (3 1 #)				
	To Add a card and Pin user (The PIN is any four digits between 0000 & 9999 with the exception of 1234 which is reserved.)	Add the card as for a card user Press * to exit from the programming mode Then allocate the card a PIN as follows: * Read card 1234 # PIN # PIN #			
	To change a PIN in card and PIN mode (Method 1) Note that this is done outside programming mode so the user can undertake this themselves	* Read Card Old PIN # New PIN # New PIN #			
To change a PIN in card and PIN mode (Method 2) Note that this is done outside programming mode so the user can undertake this themselves To delete a Card and PIN user just delete the card To add a card user in card mode (3 1 To Add and Delete a card user To delete All users		* ID number # Old PIN # New PIN # New PIN #	ŧ		
		2 User ID #			
		#)	_		
		The constitution is the constitution and deletion			
		The operating is the same as adding and deleting a card user in 3 2 #			
To delete ALL users. Note that this is a dangerous option so use with care		2 0000 #			
	To unlock the door				
	For a PIN user	Enter the PIN then press #			
	For a card User	Read card			
	For a card and PIN user	Read card then press PIN #			

Relay Output Delay Time				
To set door relay strike time	* Master code # 4 0~99 # * 0-99 is to set the door relay time 0-99 seconds			
Alarm output time				
To set the alarm output time (0-3 minutes) Factory default is 1 minute	5 0~3 #			
	there are 10 invalid cards or 10 incorrect PIN numbers will lockout for 10 minutes and the inside buzzer will ne option selected below.			
Normal status: No keypad lockout or buzzer operate (factory default) (Factory default settings)				
Keypad Lockout	71#			
Inside buzzer operate	7 2 #			
Working Modes				
Standalone access control mode	* Master code # 7 3 # The door will be locked automatically after open the door normally			
Relay toggle mode	* Master code # 7 4 # The door will not be locked automatically.To lock the door, the user has to read the card or press the exit button.			
Reader mode	* Master code # 7 5 26/34 # WG26/34 input and output			
Reader mode				

Data Backup. Example: Backup the data of machine A to machine B (Must close the Keypad output ,(* Master code # 8 8 #) The green wire and white wire of machine A connects with the green wire and white wire of machine B correspondingly, set B for receiving mode at first, then set A for sending mode, the indicator light turns green flash during the data backup, data backup is successful when indicator light turns red.					
Data backup input		* Master code # 7 7 # The device will receive the data.			
Data backup output		* Master code # 7 6 The device will receive the			
LED Light & Buzzer & Keyp	ad Setting:	s			
LED Light Flash	* Mas	ter code # 80 #	Default		
LED Light off	* Mas	ster code # 81 #	LED light stay off		
Keypad Light on	* Mas	ster code # 82 #	Keypad light stay on		
Keypad Light off	* Mas	ster code # 83 #	Keypad light stay off		
Keypad light automatic	* Mas	ster code # 84 #	Normally it is off(sleeping mode) but wake up with human approach		
Buzzer on	* Mas	ster code # 85 #	Default		
Buzzer off	* Mas	ster code # 86 #	The buzzer doesn't sound		
Keypad output on	* Mas	ster code # 87 #	keypad output is turned on		
Keypad output off	* Mas	ter code # 88 #	keypad output must be turned off during data backup		

The unit is operating as a Wiegand Output Reader

The unit supports a Wiegand 26-bit output, so the Wiegand data wires can be connected to any controller that supports a Wiegand 26-bit input.

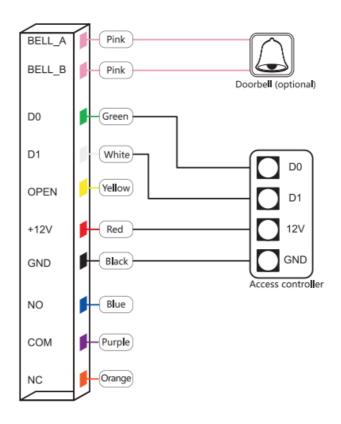

FCC STATEMENT

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to toThe following two conditions:

- 1. This device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party Responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used per the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to

correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with a minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

FAQ

- Q: How do I reset the device?
- A: To reset the reader, locate the reset button (usually a small hole) and use a paperclip to press and hold it for a few seconds.
- Q: Can I expand the storage capacity?
- A: Yes, you can insert a microSD card into the designated slot to expand the storage capacity of the device.

Documents / Resources



Shenzhen Technology K5EM Standalone Keypad Access Control [pdf] Us er Manual

2BK4E-K5EM, 2BK4EK5EM, K5EM Standalone Keypad Access Control, K5EM, Standalone Keypad Access Control, Keypad Access Control, Access Control, Control

References

- User Manual
- Shenzhen Technology
- ◆ 2BK4E-K5EM, 2BK4EK5EM, Access Control, control, K5EM, K5EM Standalone Keypad Access Control, Keypad Access Control, Shenzhen Technology, Standalone Keypad Access Control

Shenzhen Technology JB01 MINI PC User Manual

Your email address will not be published. Required fields are marked *

Leave a comment

Comment *
Name
Email
Website
vvebsite -
☐ Save my name, email, and website in this browser for the next time I comment.
Post Comment
On analysis
Search:
e.g. whirlpool wrf535swhz
ocaron ocaron

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.