

[Skip to content](#)

Manuals+

User Manuals Simplified.



SHENZHEN RK9013 Multi-Device BLUETOOTH Wireless Keyboard User Manual


[Home](#) » [Shenzhen](#) » SHENZHEN RK9013 Multi-Device BLUETOOTH Wireless
Keyboard User Manual



SHENZHEN

RK9013 Multi-Device

BLUETOOTH Wireless Keyboard
User Manual

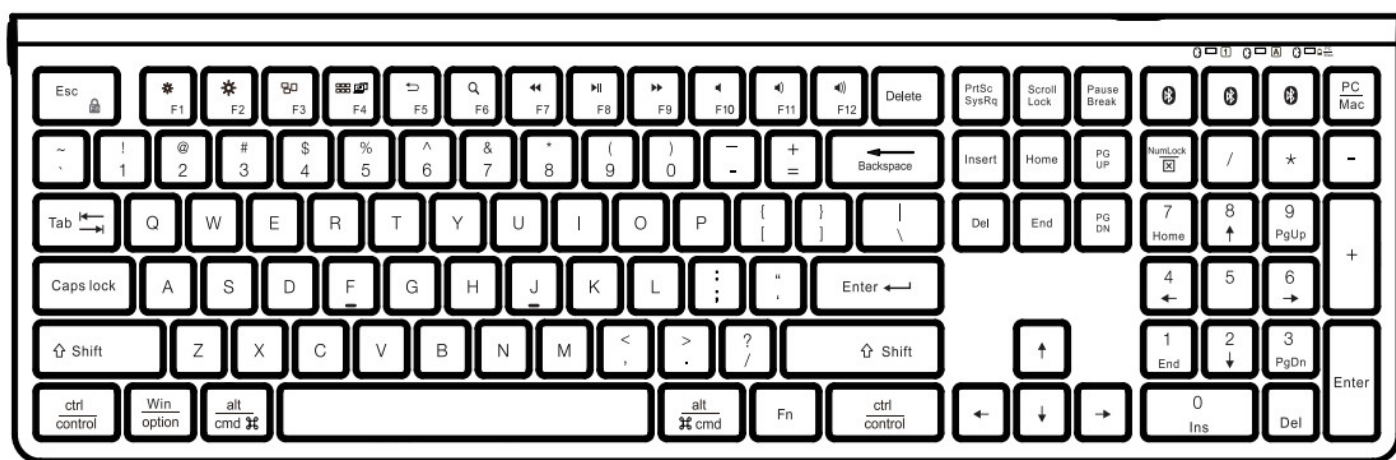

Contents [hide](#)

[1 Package Content](#)

[2 Specification](#)

[3 Important](#)

[4 Features](#)

[5 Multimedia Keys](#)

[6 Pairing](#)

[7 Indicator](#)

[8 Compatible with Mac OS, Windows systems](#)

[9 Sleeping mode](#)

[10 Documents / Resources](#)

[11 Related Posts](#)

Package Content

Bluetooth Keyboard X 1
Type-c Charging Cable X1
User Manual X1

Specification

Abmessung	432*132*19mm
Bluetooth version	Bluetooth 3.0
Working distance	10 meters/11 yards
Battery capacity	300 mAh
Charging voltage	5V
Working voltage	DC 3.7V
Working current	2-5mA
Worktime	150 hours after one full charge
Sleep mode	After 30 minutes of inactivity
Sleep mode current	40uA
Standby time	180days














Important

1. Do not use this product after liquid infiltration
2. Do not expose this product to extreme temperatures.
3. Do not attempt to disassemble this product on your own.
4. Avoid dropping this product.
5. The charging voltage of this product is 5V, any adapter that meets the charging voltage specification can charge this product.
6. Please use this product within the effective working distance.


Features

1. You can switch and pair with three different devices through Bluetooth.
2. Three independent pairing channels. You don't need to use any combination key to enter pairing mode or switch between devices. The pairing experience is simple and easy.
3. You can switch between pairing devices by clicking one button. The switching process will be done in 2 seconds.
4. This product will automatically reconnect to a previously paired device.
5. 150 hours of work time and more than half a year of standby time after one full charge.
6. Rechargeable battery.


Multimedia Keys

Keys	Windows	Mac OS	FnLock (Windows)	FnLock(Mac OS)
	FnLock	FnLock	Esc	Esc
	Brightness down	Brightness down	F1	Ft
	Brightness up	Brightness up	F2	F2
	Multiwindow switch	Multiwindow switch	F3	F3
	Windows function	Desktop menu	F4	F4
	Return		F5	F5
	Search	Search	F6	F6
	Previous track	Previous track	F7	F7
	Play/pause	play/pause	F8	F8
	Next track	Next track	F9	F9
	mute	mute	F10	F10
	Volume down	Volume down	F11	F11
	Volume up	Volume up	F12	F12


Pairing

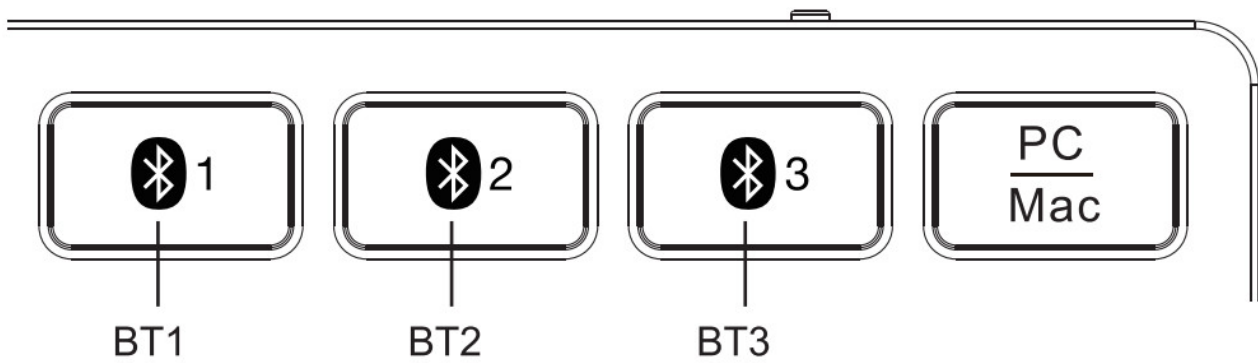


Step 1 Turn on the keyboard.

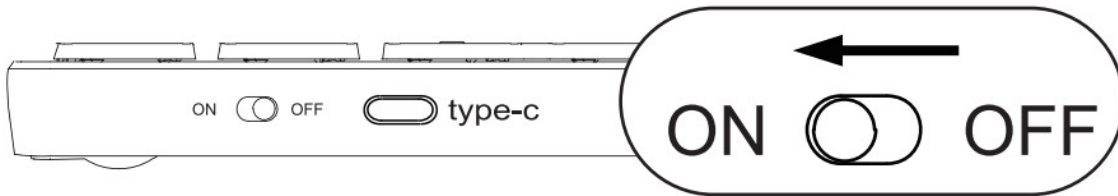

Step 2: Switch to the channel by pressing the BT button. For example, press BT1 to enter the pairing mode of the BT1 channel.



Step 3: Press and hold the "BT1" key for three seconds. or until LED1 start flashing green to enter pairing mode.

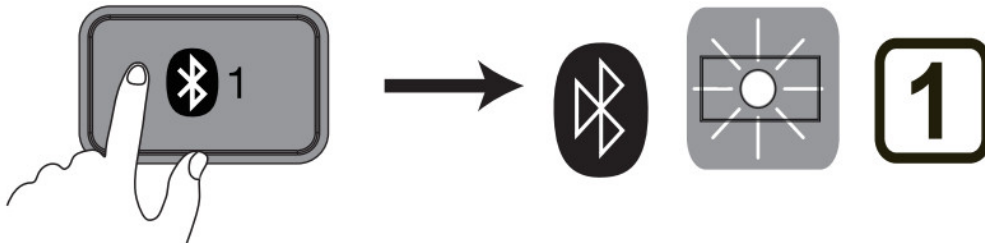

Step 4. Turn to Bluetooth settings on your device, and search for the device" Bluetooth keyboard".

Step 5: Click "Bluetooth Keyboard" and wait until LED1 stops flashing.

Step 6: The keyboard is paired.

How To Switch Bluetooth Channels(Take BT2 Channel or example)


Step 1: Press BT2 to switch to Bluetooth channel 2, LED 2 flashes for 1 second.

Step 2: Press and hold BT2 to enter pairing mode, the green light keeps flashing,

Step 3: Turn to Bluetooth Settings on your device, and search for " Bluetooth keyboard".

Step 4: Click "Bluetooth keyboard", and connect to the BT2 channel.

Step 5: Your device is connected, and the LED light stops flashing.

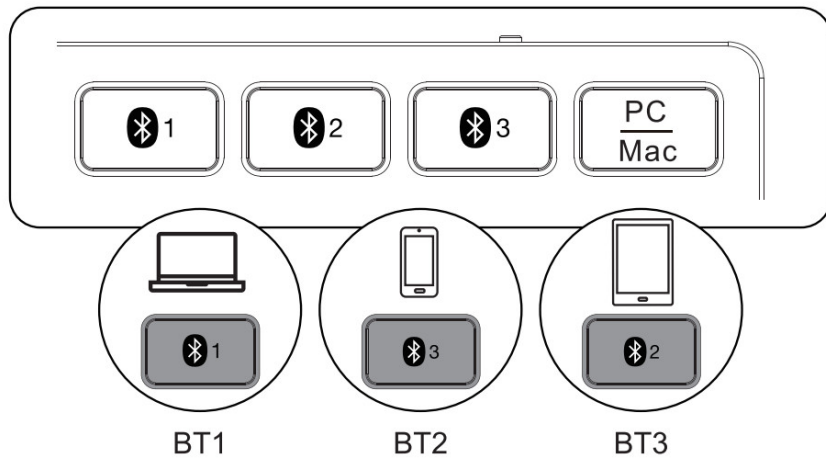

Step 6: It works the same for BT1. BT3.

How to switch Between Bluetooth Channels


After all three devices are paired, you can switch between devices by pressing the "BT" button (For example, if you want to switch to BT2, you can just simply press BT2, it works the same for BT3).

Auto-reconnect:

If you turn off the keyboard and turn it back on, the keyboard will automatically connect to the pairing device it paired last.

For example, if you used BT1 and connected to device 1 before you turn off the keyboard. It will attempt to reconnect to device 1 through channel BT1 after you turn it on.

Indicator

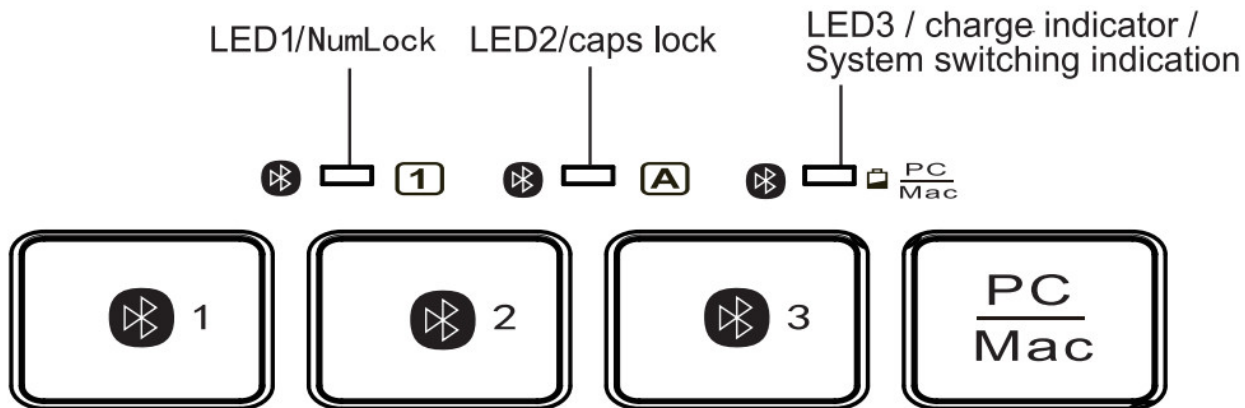

1. Charging indication. LED3 light keeps on and turns off when fully charged.
2. Caps lock: The power light will be on for 10 seconds.
3. Keyboard system switch, LED3 prompt light flashing 2 times.

LED lights:

1. Pairing: When pairing, the LED light will start flashing. It will turn off after the pairing is successful.
2. Switching. Press the "BT" buttons once to switch between devices.
The green LED light will turn on for 1 second, and then flash 5 times if the device is already connected to the keyboard. If the pairing device is not connected to the keyboard, the LED light will be on and goes off after 1 second.

Compatible with Mac OS, Windows systems

The keyboard factory set the system default Windows system.

After paired, if your device is Apple MacBook, please press  the key 3 seconds. LED3 green light flashes 2 times. the Bluetooth keyboard switches to Mac OS system state.

Tips

1. Mac OS X 10.7 Or higher
2. Windows 8 or updated

Sleeping mode

In the Bluetooth keyboard pairing state, if 30 minutes no use the Bluetooth keyboard, it will come into sleeping mode, When re-using the keyboard, press any keys, and wait for 3s, the keyboard will work again.



Documents / Resources

[SHENZHEN RK9013 Multi-Device BLUETOOTH Wireless Keyboard](#) [pdf] User Manual
RK9013, Wireless Keyboard, BLUETOOTH Wireless Keyboard, Keyboard

[Manuals+](#),

- [home](#)
- [privacy](#)