



SIIG CE-KV0E11-S1 HDMI 4K HDR KVM USB 3.0 Switch with RC User Manual

[Home](#) » [SIIG](#) » SIIG CE-KV0E11-S1 HDMI 4K HDR KVM USB 3.0 Switch with RC User Manual 

SIIG CE-KV0E11-S1 HDMI 4K HDR KVM USB 3.0 Switch with RC User Manual



Contents

- [1 Features](#)
- [2 Package Contents](#)
- [3 Layout](#)
- [4 Remote Control](#)
- [5 Hotkey Command](#)
- [6 Application](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Features


- Support HDMI 2.0
- Support 4K@60Hz & HDR
- Display EDID bypass
- Support two USB 2.0 ports for wired mous & keyboard use only
- Support two USB 3.0 5Gbps ports, 5V/900mA
- Support 3.5mm jack for Microphone and Speaker extend
- Switch control by front panel, IR remote or hotkeys
- Support auto-switch mode
- Support Windows and Mac systems
- Plug-n-play, no driver installation

Package Contents

- HDMI 4K HDR KVM USB 3.0 Switch with RC
- Power Adapter 5V/3A
- USB 3.0 Type-A to B cable x 2 (CE-KVOE1 1 -SI) USB 3.0 Type-A to B cable x 4 (CE-KV0F1 1 -SI)
- IR extender cable
- IR remote control
- User manual

Layout

Front Panel

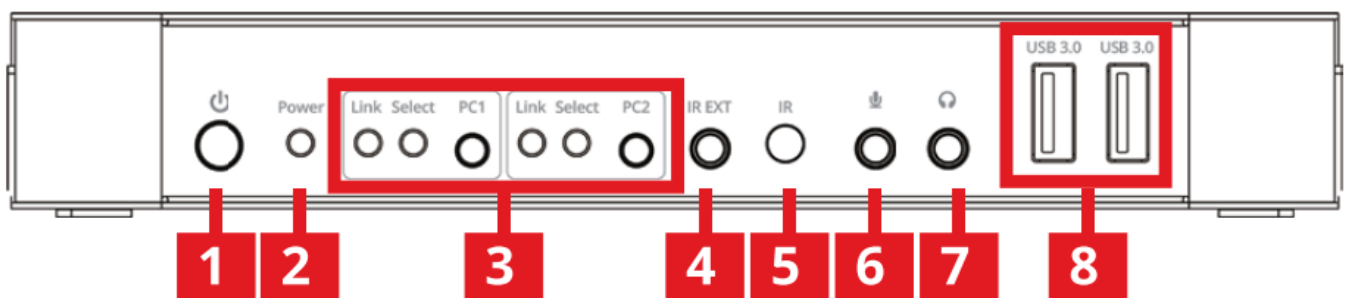


2×1 & 4×1 port define are the same design, the manual use 2×1 layout as example.

1. Power Button: Turn on/off the unit
2. Power Indicator:
3. Input Selection Button: "Select" lights up to indicate input selection "Link" lights up when the USB-B port is connected.
4. IR EXT: Connect to IR Extender cable
5. IR: For IR signal reception from the remote control
6. Microphone port at console
7. Speaker/Earphone port at console


8. USB 3.0 hub ports at console for peripherals 5Gbps, 5V/900mA

Rear Panel

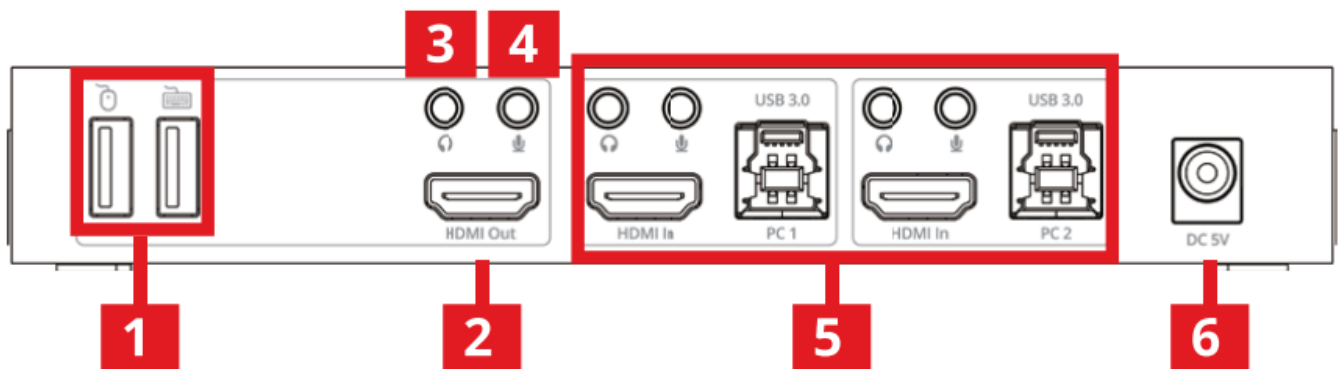

1. USB keyboard & mouse ports at console (for wired keyboard & mouse use only)
2. HDMI output: resolution up to 4K@60Hz
3. Microphone port at console
4. Speaker/Earphone port at console
5. PC-x input ports:
 - Microphone port for PC-x
 - Speaker/Earphone port for PC-x
 - USB-B port for PC-x
 - HDMI input for PC-x
6. Power jack: DC 5V/3A

Remote Control

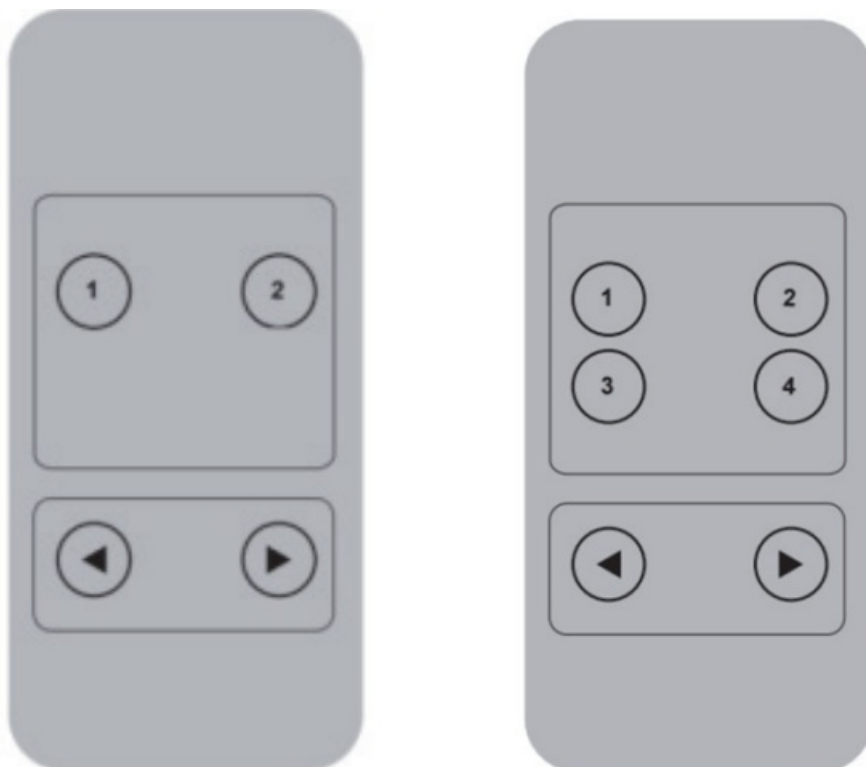

- 1.2.3.4: Switch to PC 1 or 2 or 3 or 4



-  : Switch to previous PC

-  : Switch to next PC

Hotkey Command

Hotkey Command	Description
[Scroll Lock] + [Scroll Lock] [4 or 4/]	Switch to the next port
[Scroll Lock] + [Scroll Lock] [F or IN]	Switch to the previous port
[Scroll Lock] + [Scroll Lock] [N] (N=1 or 2)	Switch to PC N
[Scroll Lock] + [Scroll Lock] [S]	Automatic switching function(Default: 15 sec) Press any key of the keyboard will stop.
[Scroll Lock] + [Scroll Lock] [I] + [Number] [Enter]	Set the automatic switching interval (10-999 seconds)
[Scroll Lock] + [Scroll Lock] [B] + [1/0]	Buzzer on/off (Default: on)
[Scroll Lock] + [Scroll Lock] [F] + [L] + [A] + [S] + [H] [Enter]	All resume hotkey default mode

Application

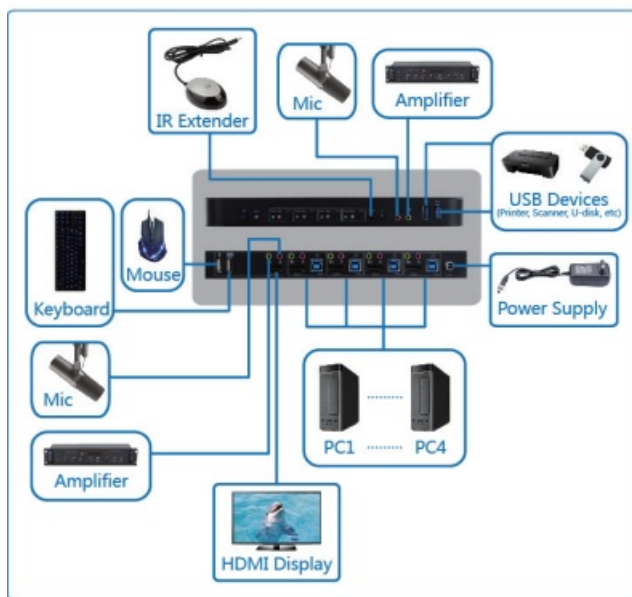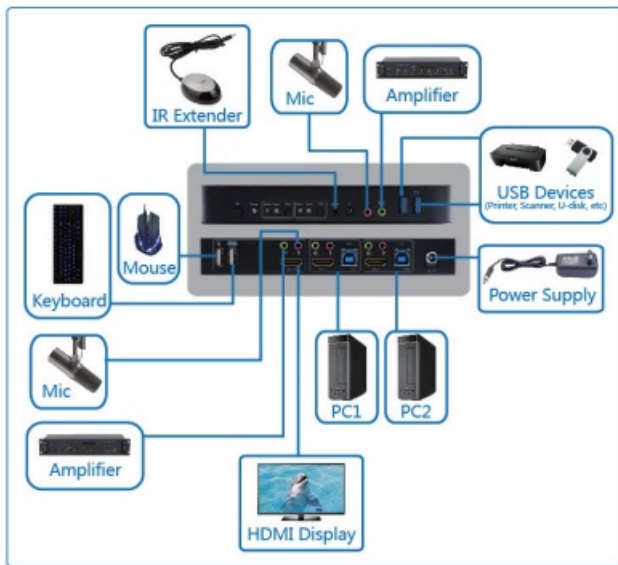

Dear Valued Customer
WE REALLY
APPRECIATE
YOUR PURCHASE

thank you

Support

For more info or tech support

<http://www.siig.com/support>

Dec, 2021 Copyright 2021 by SIIG, Inc. All rights reserved.

Documents / Resources

 2x1 / 4x1 HDMI 4K HDR KVM USB 3.0 Switch with RC User Manual  04-1307A P/N: CE-KV0E11-S1 P/N: CE-KV0E11-S1	SIIG CE-KV0E11-S1 HDMI 4K HDR KVM USB 3.0 Switch with RC [pdf] User Manual CE-KV0E11-S1 HDMI 4K HDR KVM USB 3.0 Switch with RC, CE-KV0E11-S1, HDMI 4K HDR KVM USB 3.0 Switch with RC
--	--