



# sikkerthjem DBC01 Wireless Security Camera Instruction Manual

[Home](#) » [sikkerthjem](#) » sikkerthjem DBC01 Wireless Security Camera Instruction Manual 

sikkerthjem DBC01 Wireless Security Camera Instruction Manual



## Contents

### 1 OVERVIEW

### 2 SECURITY AT HOME & BEYOND

#### 2.1 QUICK SETUP

##### 2.1.1 CHARGE AND POWER ON

##### 2.1.2 ADD THE CAMERA

##### 2.1.3 CONNECT TO WI-FI

##### 2.1.4 PLACE THE CAMERA

#### 2.2 APP FUNCTIONS

#### 2.3 LIVE VIEW

#### 2.4 HOW DOES MOTION DETECTION WORK?

#### 2.5 HOW TO EXTEND THE BATTERY LIFE?

#### 2.6 HOW TO RESET THE CAMERA?

#### 2.7 FEATURES

#### 2.8 PERMISSIONS & PRIVACY

#### 2.9 SPECIFICATIONS

#### 2.10 FCC STATEMENT


#### 2.11 NOTIFICATIONS


### 3 Documents / Resources

#### 3.1 References

### 4 Related Posts

## OVERVIEW

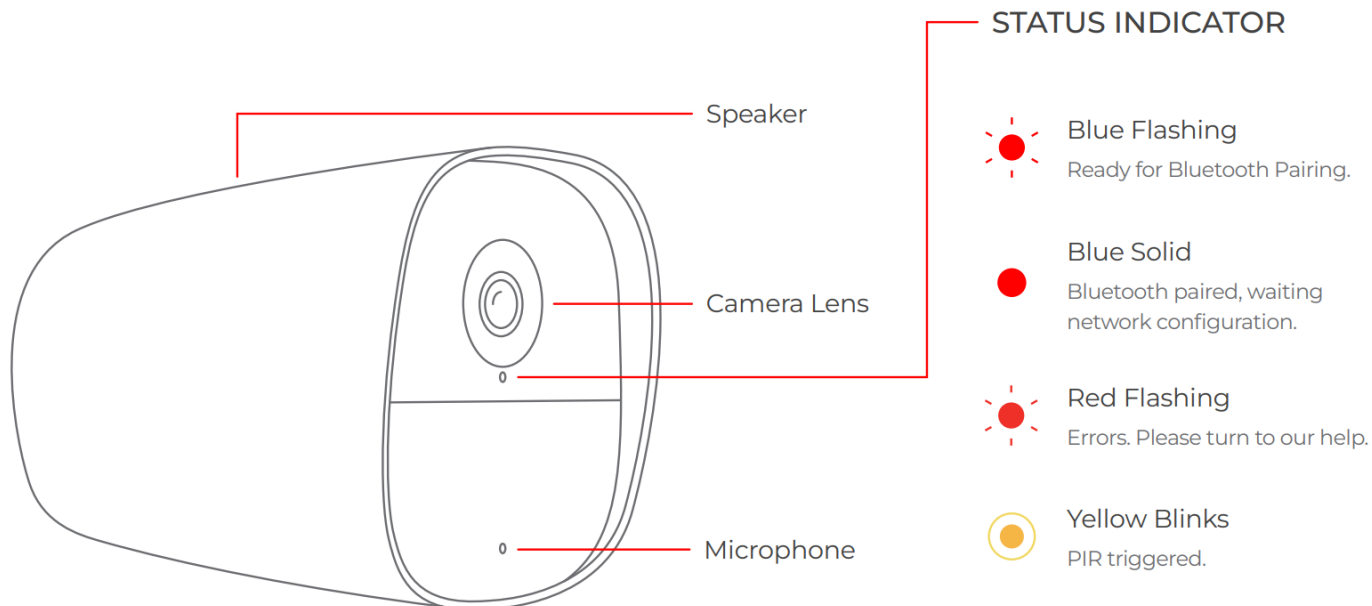

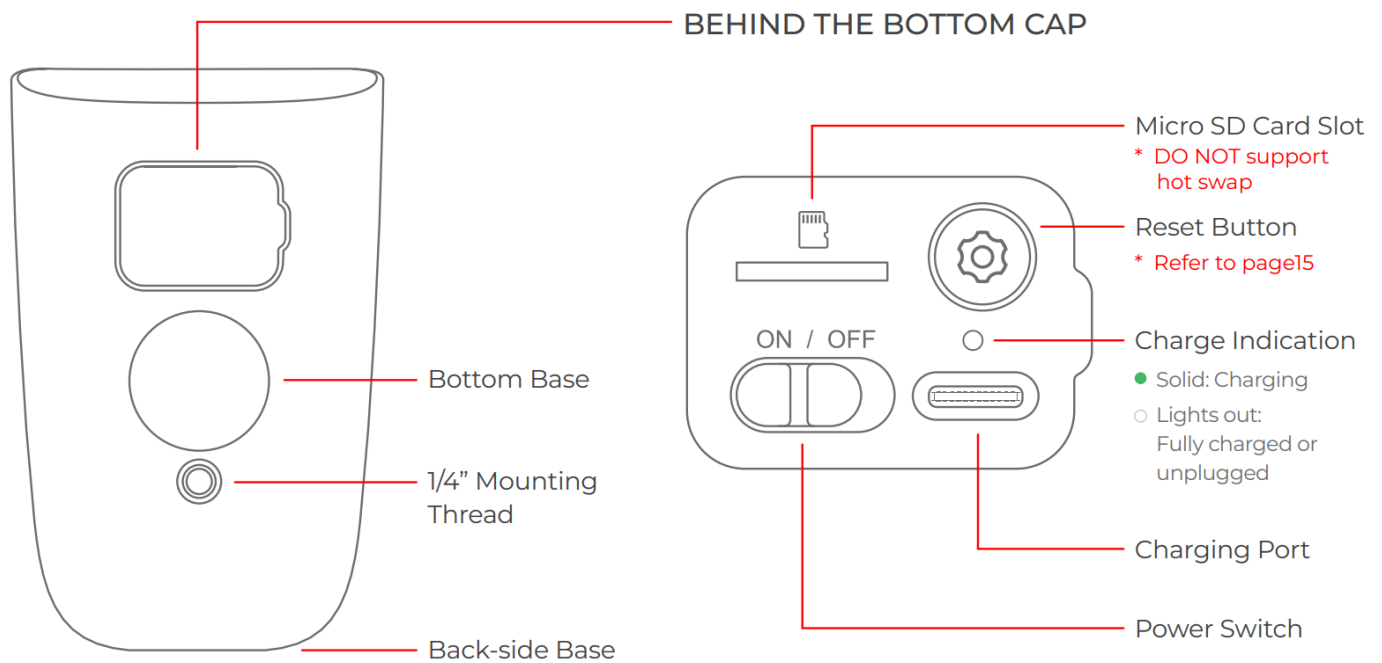

## SECURITY AT HOME & BEYOND

Changing how the world thinks about security inside & out!

## QUICK SETUP

### DOWNLOAD THE APP

1. Scan the QR Code on the right, or search S7pro or SikkertHjem in the Apple App Store or Google Play Store.  
Create an account in the app, or login if you already have one.




S7pro app

### CHARGE AND POWER ON

Please charge the camera first with the included USB-C charging cable.

The camera will automatically go into Bluetooth connection mode when powering on, with a beep and blue flash of the indicator.

Please add it within the next 5 minutes, or it will enter battery saving mode (You can turn off and turn on the camera again to restart).

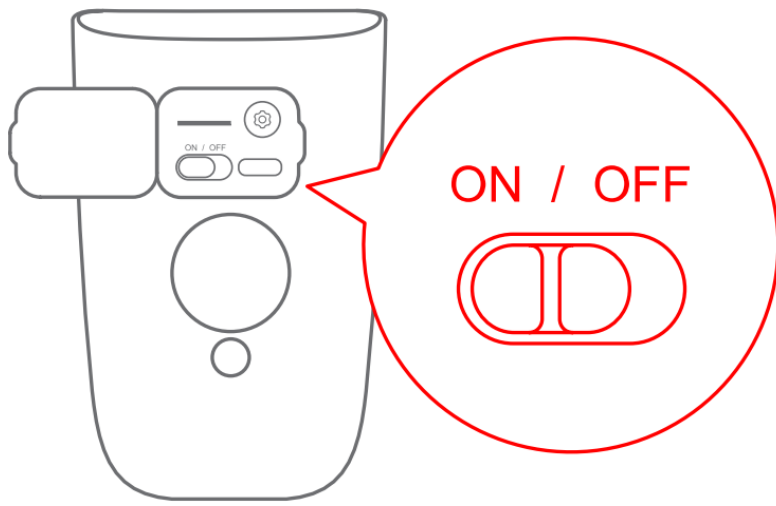



## ADD THE CAMERA

Open the Helio Pro app and scan the QR code on the bottom of the camera. If you have already added other devices to the app, tap **Add Accessory** on the settings page.

The app will list devices scanned by Bluetooth.

Click to connect, the camera will beep and the indicator will switch to blue solid.

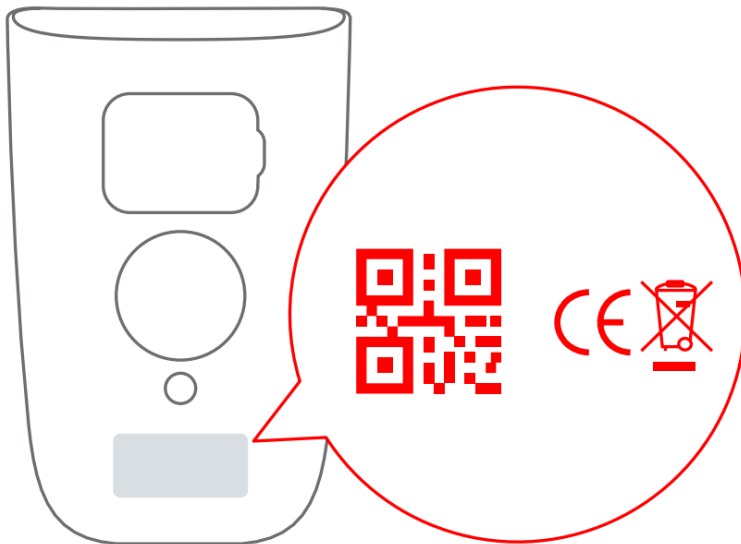

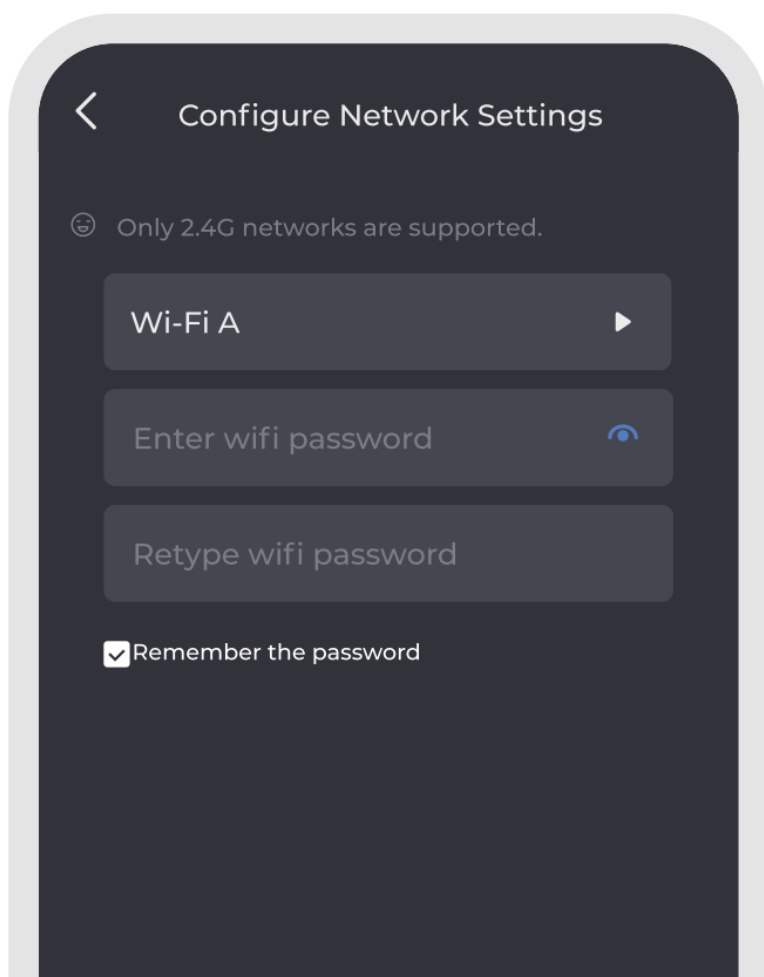


## CONNECT TO WI-FI

Select the Wi-Fi (2.4 GHz) network you want connect the camera to and enter your Wi-Fi password. After successfully configuring the network, the camera will beep and the indicator light will go out.

## PLACE THE CAMERA


Avoid facing areas with strong light, temperature changes rapidly or the air stream flows frequently. Avoid facing high-traffic areas to reduce frequent triggering of the PIR sensor.

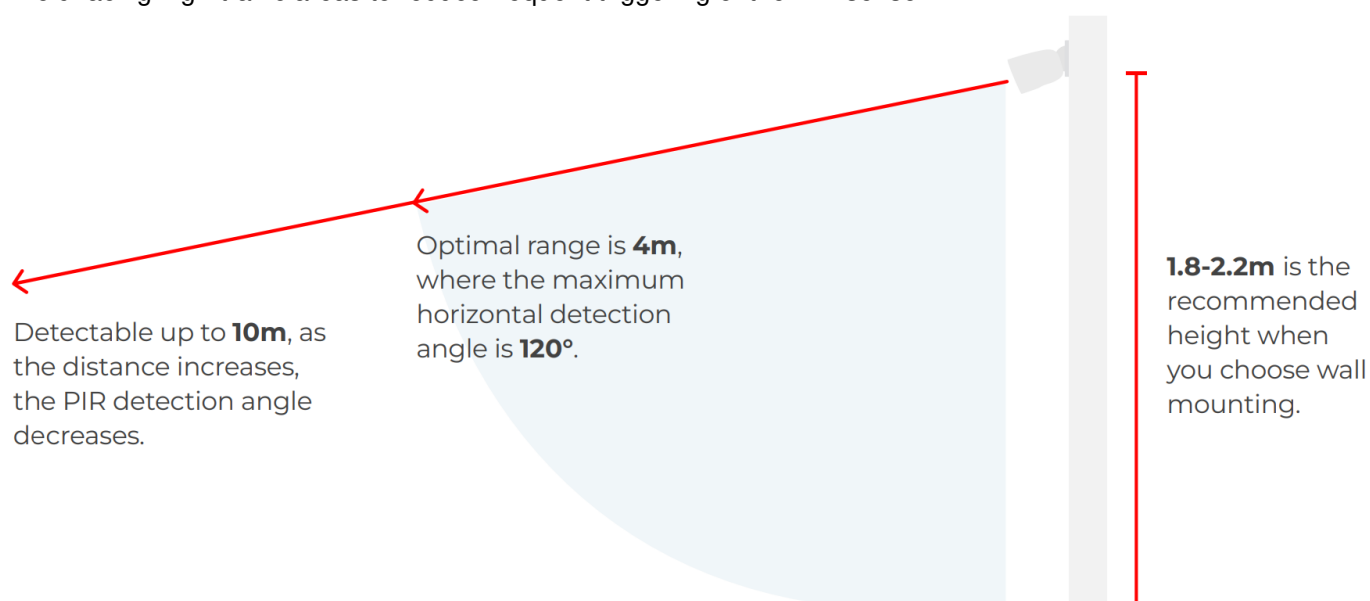


You can use the live view interface in the app to fine-tune the view of the camera in real-time.

## Desktop Placement

1. Place the magnetic ball mount on a table, shelf or any other flat surface and attach the camera on top of it, using its bottom base.

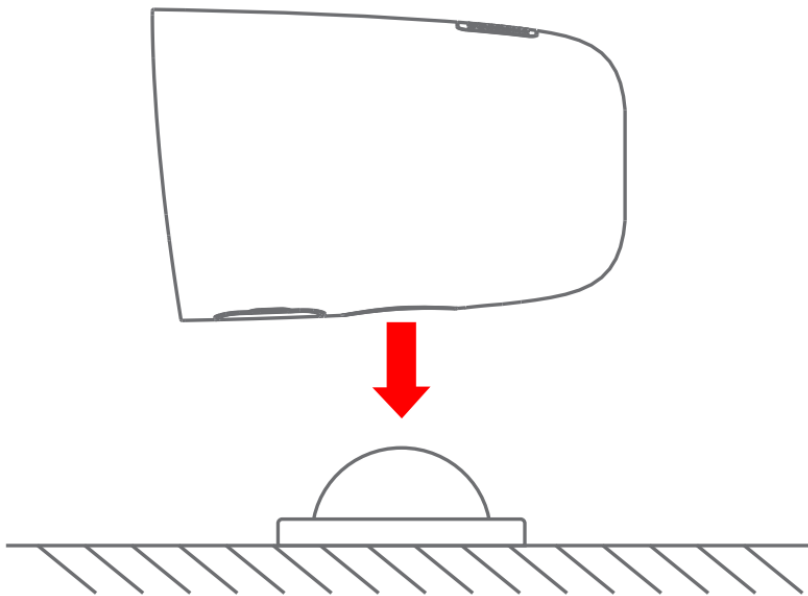


2. Rotate the camera to adjust the viewing angle.

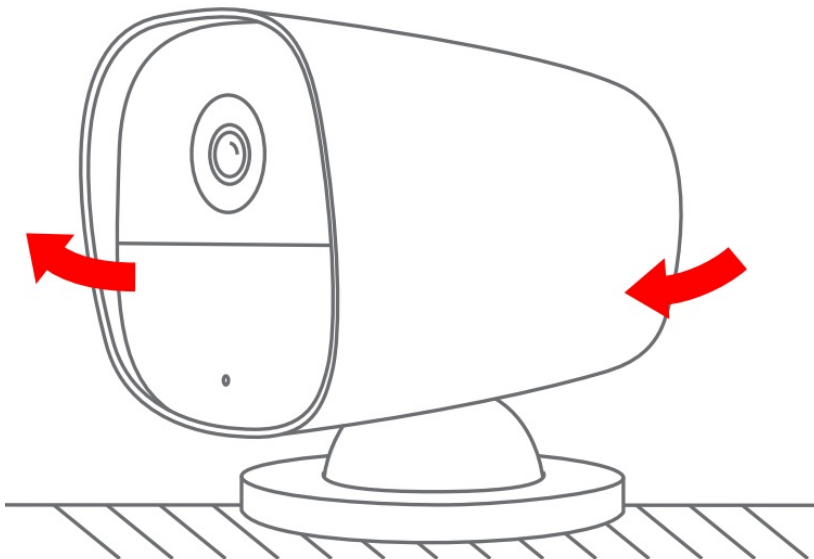


## Wall Mounting


1. Remove the ball mount's upper cover to access its screw holes.

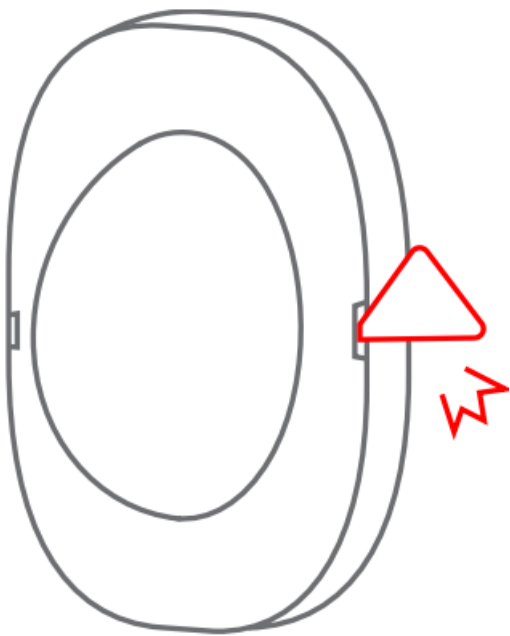


2. Mark the holes location on the wall.

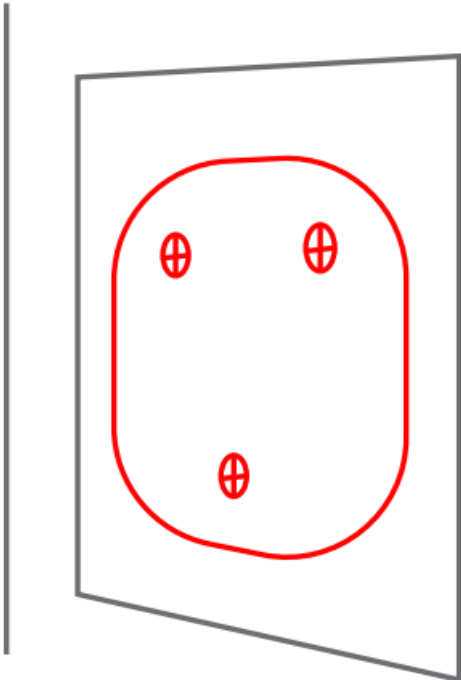

3. Drill the holes, insert the includes anchors and fix the mount to the wall as shown.

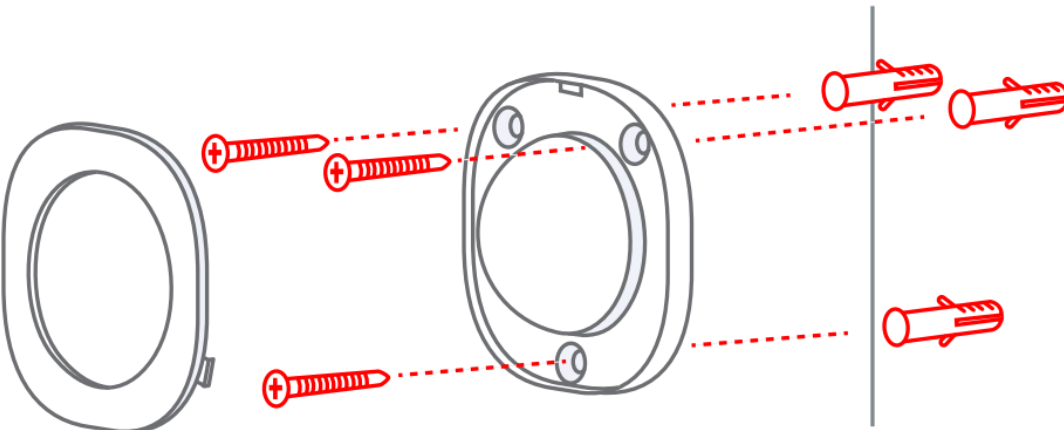


4. Attach the camera to the mount using its back-side base.

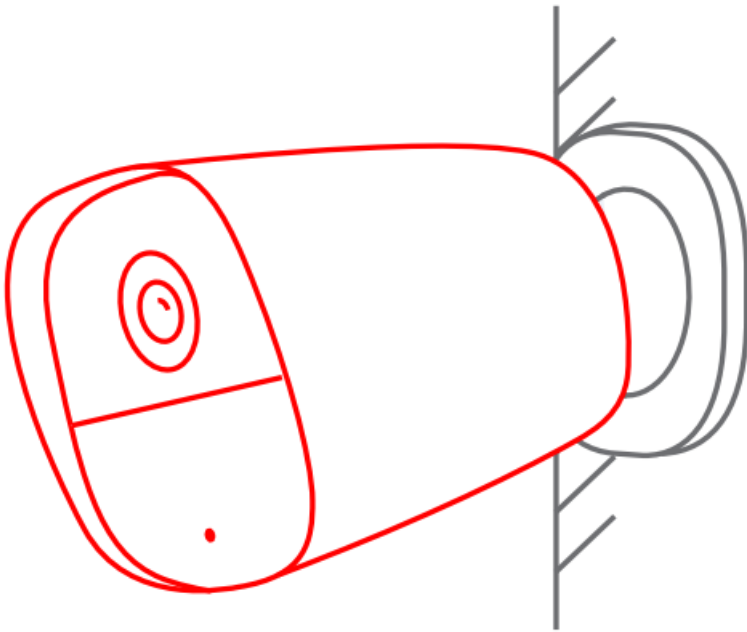


## APP FUNCTIONS

Customize the homepage: Swipe up and tap EDIT on the top of the floating layer.  
Shown here is the Cameras-Only Mode. You can also use it with the Helio Pro Smart Security System for full protection of your home.

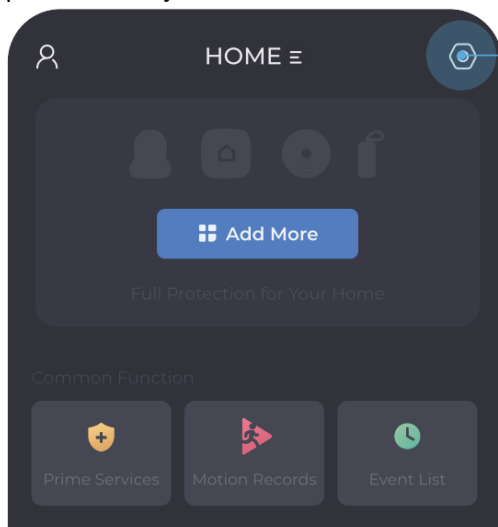

All of your devices  
can be found under  
Settings

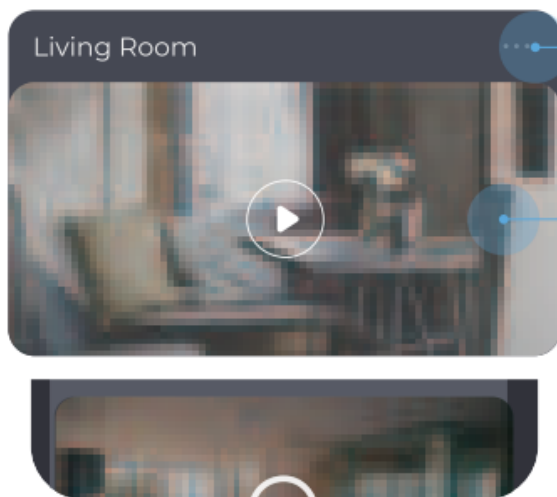








Camera Settings

Start Live View  
**\* Refer to page12**

## LIVE VIEW



-  Collapse/Expand secondary toolbars.
-  Tap to take a screenshot.
-  Sound on/off
-  Enable two-way audio
-  Switch the IR night vision/Color night vision.
-  Switch the HD/SD display of live streams.

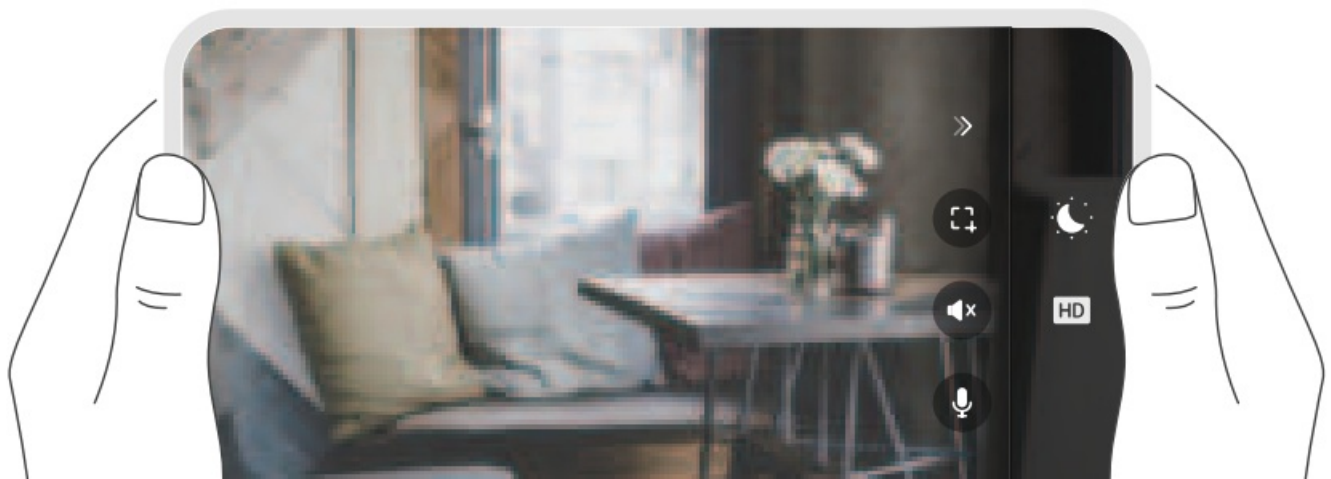

## HOW DOES MOTION DETECTION WORK?


### PIR Detection

It triggered by objects with a heat source such as humans, animals, cars, even hot/cold air. With AI detection, humans can identified.

The camera generates 15s of video per trigger, and can be re-triggered after a 10s cooldown.

### Records & Notifications

Consecutive triggers only generate one App push to avoid frequent disturbances.

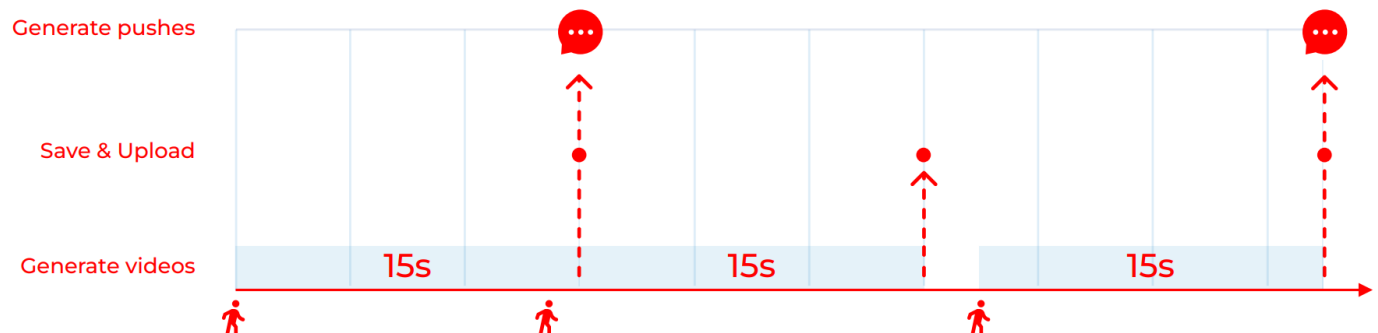

## HOW TO EXTEND THE BATTERY LIFE?

### Set a reasonable motion detection time

To reduce the power consumption caused by the Camera being woken up frequently.

- Camera Settings-Motion Detection-Detection Conditions

### Set the appropriate detection accuracy

If the detection accuracy is set to HIGH, the AI recognition process will increase power consumption.


- Camera Settings-Motion Detection-Detection Accuracy

### Reduce App usage time

The system waking up Camera each time the App is launched also increases power consumption.

According to experimental data, the Camera can provide approximately 6 months of standby time with less than 5 triggers per day.

## HOW TO RESET THE CAMERA?

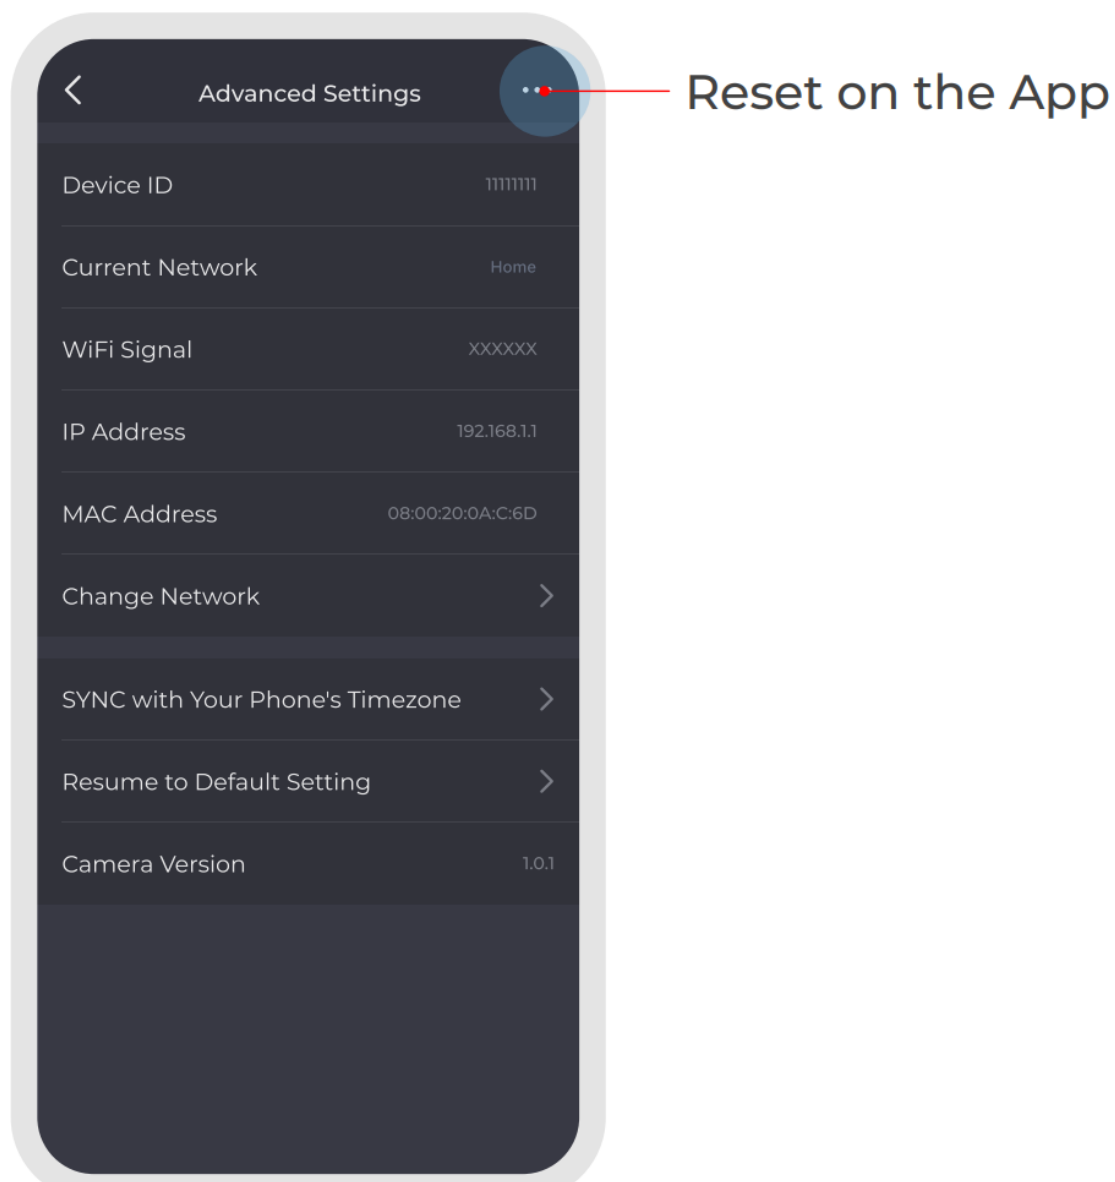

When the camera is **ONLINE**, tap here to reset.


After resetting, all data will be deleted and the camera will reboot, allowing you to add it as new.

When the camera is **OFFLINE**, tapping here will only delete it.

After deletion, the camera will be unbundled from the family.

However the hardware is not reset. To add it again, you need to reset on the camera as on the right.

### Reset on the Camera

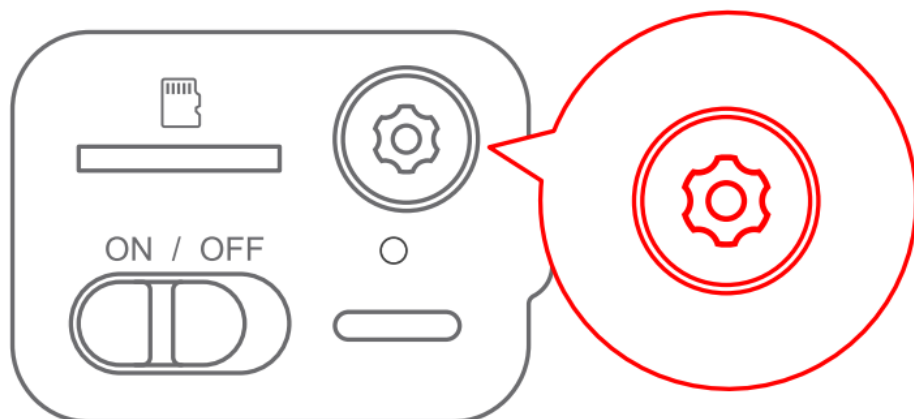

Open the cap at the bottom of the device and hold the **RESET BUTTON** for 5 seconds until you hear a beep. After resetting, all data will be deleted and the camera will reboot, allowing you to add it as new.

## FEATURES

- **AI Smart Detection**



You can customize detection accuracy to filter invalid alarms such as vehicles, animals, trees, rain snow, etc.

- **1080P Full HD**



Video resolution 1920×1080, frame rate 15fps, wide-angle view, capture bigger picture, HD restore scene environment.

- **IR-Cut/Color Night**



At night with low light, the camera will use Color Night mode. When the light is very weak, it can switch to IR-Cut, the visible distance is 10 meters.

- **Wi-Fi Connection**



IEEE 802.11 b/g/n compliant WiFi standard, 2.4GHz frequency range, support WEP, wpa-psk and wpa2-psk encryption.


- **H.265 Encode**



The new generation of H.265 video coding technology can save video storage space and make view smoother under the same network conditions.

- **Real Two-way Audio**



In the App live monitoring view, you can click the button to start two-way audio. Click the  button again to exit.

- **Global Servers**



Global overseas servers ensure that users can easily watch real-time live broadcast or video playback anytime, anywhere on their mobile phones.

- **Military-grade encryption**



Military-grade encryption is used for live streaming and video storage, and only accounts with user rights can decrypt videos.

- **Solar Charging Support**



The product supports 5.5V MAX solar panels. In addition to the regular Type-C charging, it can also be charged by solar energy to extend the battery life.

- **Cloud Backup**



You can choose the Cloud Storage service in the App according to your own needs to avoid the loss of video files due to the theft or destruction.

- **IP65 Waterproof**



It can prevent dust particles from entering the product gap; It can prevent any direction of strong water spray, but can not be soaked in water.

- **Ultra-long Standby**



After fully charged, the battery is expected to last six months.

- View by 5 times per day

## **PERMISSIONS & PRIVACY**

**Notification** : Device information and system status messages can help you manage your device and protect your security.

**Critical Alert** : When your iPhone is in Silent or Do Not Disturb mode, you can still receive audible notifications of emergencies. **Reference**

**Photos (iOS) / Storage (Android)** : To access the album to add devices/families, or set avatar. To take screenshots or records of the monitoring screen.

**Camera :** To scan the QR code of devices/families, or set avatar.



I O S	Android
✓	✓
✓	
✓	✓
✓	✓

**Microphone (iOS) / Recording (Android) :** To enable dual-way talking feature of cameras.

**Location :** To configure devices via Bluetooth and Wi-Fi (For Android, Location access is required to using Bluetooth.)

#### Reference

**Bluetooth :** To configure devices via Bluetooth.

**Contacts :** To add SMS Contacts quickly.

I O S	Android
✓	✓
✓	
✓	✓
✓	✓

#### SPECIFICATIONS

VIDEO & AUDIO	
Image Sensor	1/2.9"
Resolution	Full HD 1920×1080
Video Bitrates	64Kbps ~ 8Mbps
Video Frame Rate	15fps @ 1080P
Encode	H.265
Day/Night control	IR-Cut/Color night
Focal Length	2.8mm
Max Aperture	f2.2
Field of View	135°
Audio	Real Two-Way audio

DETECTION & ALARM	
AI Smart Detection	PIR detection + Human detection
PIR Detecting Angle	120°
PIR Detecting Distance	8~10m
IR Distance	10m
Audio Alert	Built-in Siren, 85db
Other Alerts	Instant image/video push notifications
Recording	15s video record when triggered
Storage	Local Storage and Cloud Storage

WIRELESS CONNECTION	
WIFI	2.4 GHz
WIFI Standard	IEEE 802.11 b/g/n
WIFI Security	WEP/WPA-PSK/WPA2-PSK
Bluetooth	BLE 5.0
POWER SUPPLY	
Battery	5200 mAh rechargeable battery
Power Input	5V 2A USB Type-C
Solar	Supported (5.5V MAX)

<b>STORAGE</b>	
Micro SD Card	Supported, up to 128GB
Cloud Storage	* Supported (Optional)
<b>OPERATING ENVIRONMENT</b>	
Operating Temperature	-10 ~ 55 (14 ~ 131 )
IP Code	IP65
<b>DIMENSION &amp; WEIGHT</b>	
Dimension	<b>Camera:</b> 65.5×67.5×102.7mm <b>Magnetic Mount:</b> 64×64×22.8mm
Weight	Camera: 246.4g Magnetic Mount: 50.4g

## FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

**Warning:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

This device may not cause harmful interference, and This device must accept any interference received, including interference that may cause undesired operation.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## FCC RADIATION EXPOSURE STATEMENT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

**FCC ID:** 2A4SP-DBC01

## NOTIFICATIONS





The individual parameters, digital description and design in the manual may vary as the device versions are updated.

Please observe the working rules of electrical equipment. Users are not allowed to dismantle the device or replace any part of it. Opening or dismantling the device may cause electric shock.

This device can minimize most of the risks, but it is not guaranteed to prevent burglary, robbery, theft or other types of emergencies. Users should use it reasonably and properly to protect the safety of life or property.

Motion detection: the device uses AI image recognition and heat source induction to improve the accuracy of motion detection and filter invalid alarms as much as possible. Users need to choose the appropriate motion detection accuracy according to the monitoring site. This device can only detect intrusion in the designated scope and barrier free area, please install it in the position as far as possible.


Network failure, electrical system component failure and other problems may affect the operation of the device.



Made in China

---

## Documents / Resources

	<a href="#">sikkerthjem DBC01 Wireless Security Camera</a> [pdf] Instruction Manual DBC01 Wireless Security Camera, DBC01, Wireless Security Camera, Security Camera, Camera
---	---

## References

- [User Manual](#)