



SIRUI E30B Bi Color Soft LED Panel User Manual


[Home](#) » [SIRUI](#) » SIRUI E30B Bi Color Soft LED Panel User Manual 

Contents

- [1 SIRUI E30B Bi Color Soft LED Panel](#)
- [2 Foreword](#)
- [3 Features](#)
- [4 What's in the Box](#)
- [5 Names of Parts](#)
- [6 Power Management](#)
- [7 Operation](#)
- [8 Installation](#)
- [9 Specifications](#)
- [10 Maintenance](#)
- [11 FCC STATEMENT](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)

SIRUI

SIRUI E30B Bi Color Soft LED Panel

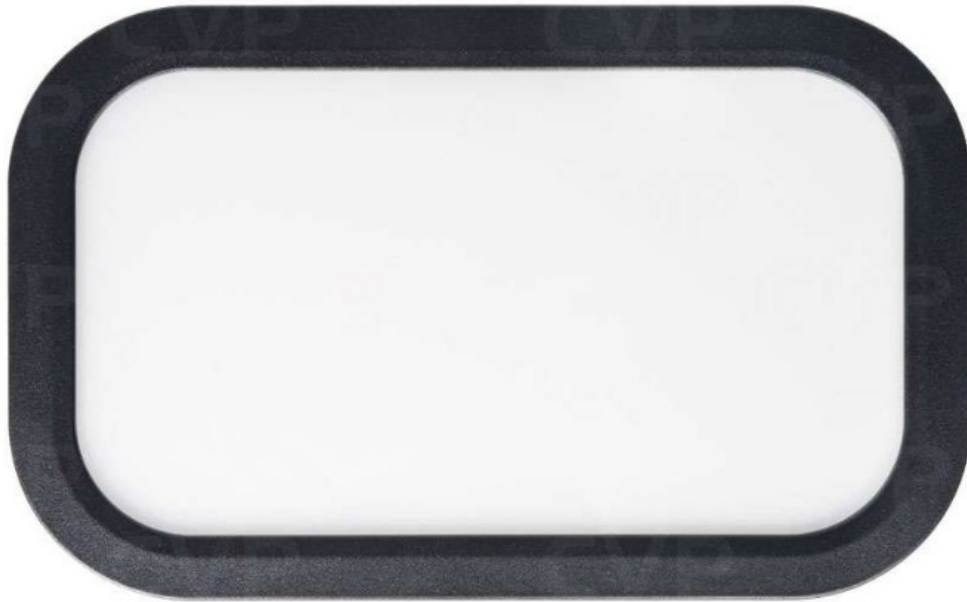


Foreword

This Bi-color LED Light E30B is a slim multi-purpose continuous light. The use of side-view SMD LEDs makes the lights given out more soft and even. Featuring a compact body and supporting both battery and adapter power supplies, this light is suitable for various shooting scenarios, e.g. live, portrait shooting, video recording, etc.

Features

1. Compact and lightweight, easy to be held in hand.
2. Freely switch between the LED bi-color mode and the light effect mode.
3. The use of side-view SMD LEDs makes sure the lights given out are bright without being too harsh.
4. Support group control and APP control.


What's in the Box



Light Body *1



Adapter *1



Pouch*1




Warranty Card*1



Handle*1

Names of Parts

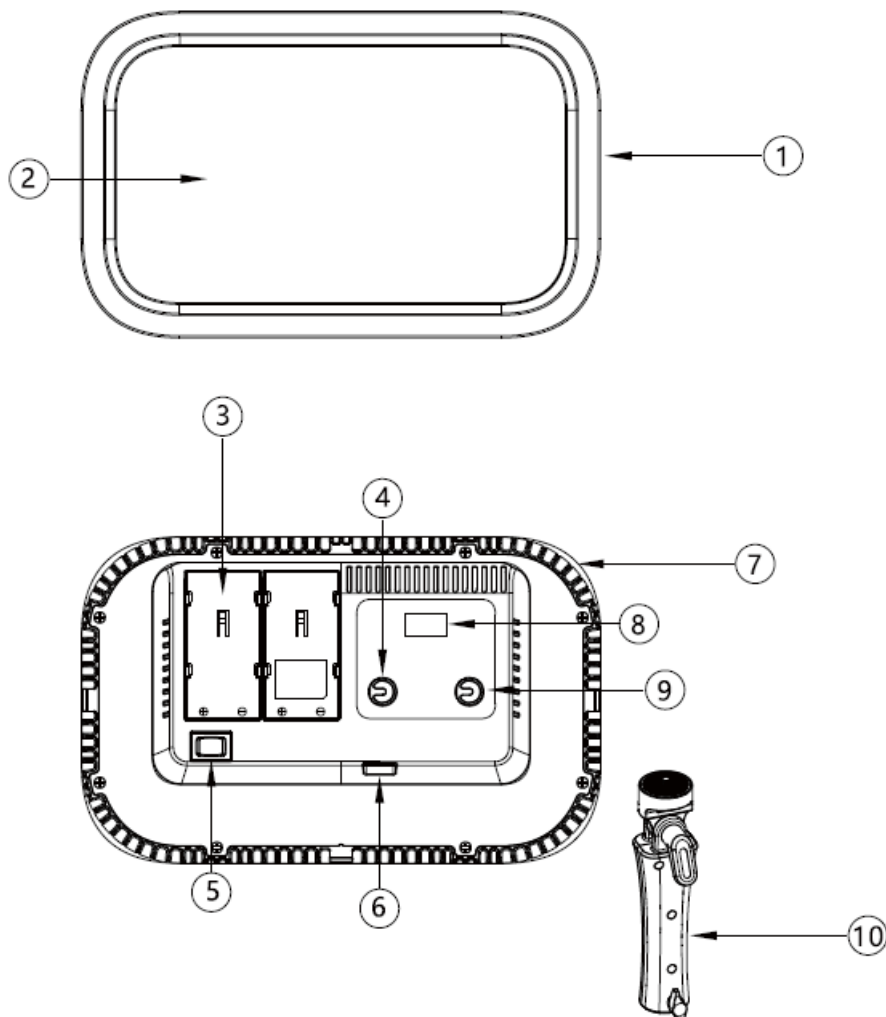

1	Frame		6	DC Power Socket
2	Light Board		7	Thermovent
3	Battery Compartment		8	Display
4	SET Dial		9	DIM Dial
5	Power Switch		10	Handle

Power Management

Adapter Power Supply

- **Input:** 100-240V-50/60 Hz, 1.5A, output: 16.8V 3A


External Battery Power Supply

- Install two NP-F970 batteries into the battery compartment. (The battery case is unable to charge the batteries. When powered by the battery, make sure there are at least two batteries in the case.)

Operation


Power On/Off

- When powered by the battery, hit “T” to turn on the light, press the button in the middle to turn off the light.
- When powered by the adapter, hit “II” to turn on the light, press the button in the middle to turn off the light.



1. Mode Selection: Hit the SET dial to switch between the CCT mode and FXx special effect mode.


CCT Mode

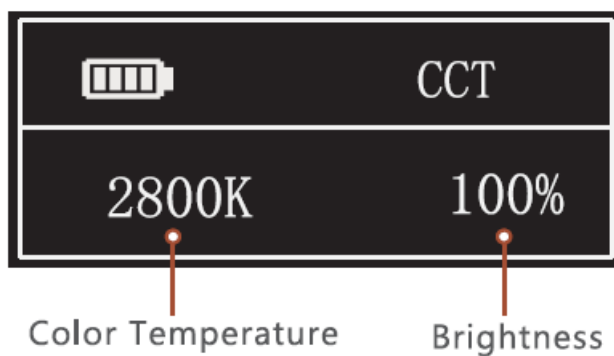

1. Color temperature adjustment: turn the SET dial to adjust the color temperature from 2800K to 7000K.

- Brightness adjustment: turn the DIM dial to adjust the brightness from 0% to 100%.

Special Effects Mode

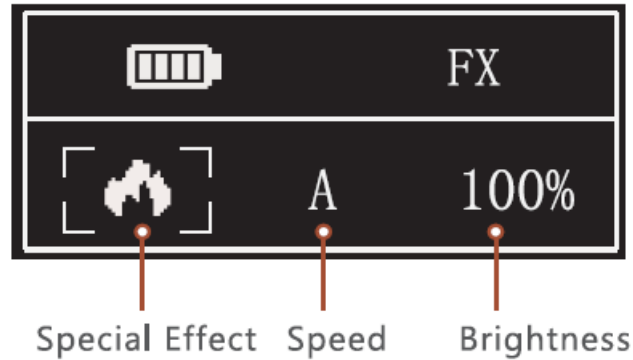

- Turn the SET dial to select a special effect. Hit the DIM dial to adjust the speed (A, B, C). Turn the DIM dial to adjust the brightness.
- Brightness adjustment: turn the DIM dial to adjust the brightness from 0% to 100%.

There are 12 situational special effects for your choice

No.	Display	Situation	DisplayA	DisplayB	DisplayC
1		Lightning	Discontinuous	Frequent	Sustainable
2		Flash	Flash	Press Conference	Paparazzi
3		Broken Bulb	Discontinuous	Frequent	Sustainable
4		TV	Slow	Medium	Quick
5		Candle	Discontinuous	Frequent	Sustainable
6		Fire	Firewood	Campfire	Fire Hazard
7		Firework	Brief	Continuous	Show
8		Blast	Discontinuous	Frequent	Sustainable
9		RGB Cycle	Slow	Medium	Quick
10		Impulse	Slow	Medium	Quick
11		Welding	Discontinuous	Frequent	Sustainable
12		SOS	Slow	Medium	Quick

APP Control

- Press and hold the SET dial to turn on Bluetooth. (Press and hold the SET dial again to turn off Bluetooth.)
- Scan the QR code to download the "SIRUI Light" App.
- Turn on Bluetooth, enter the "SIRUI Light" App. Select "E30B LED Light" from the device list.


Scan the QR code to download the App



- For detailed steps, please refer to the APP instruction manual.

Installation

1. Mount the LED light on a stand via the bottom/lateral 1/4" screw hole.

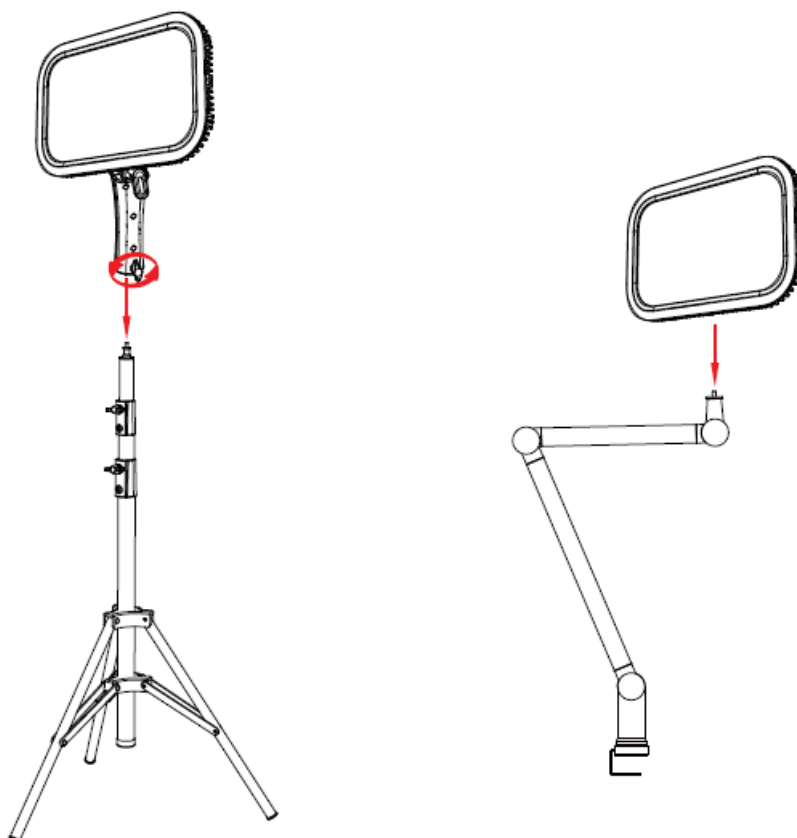

Specifications

Model	E30B
Sin	264*164*36mm
Weight	about 880g
Power	about 25W
Color Tamperat 11H Rllnga	2B001C- 7000K
Speclal Effect	12
100% Illumlnance (LUX)	750 lux at 1m
TLCI	98 on average
CRI	96 on average
Working Tempreture	-10°C—4S°C
Control Method	APP Control
Wireless Bluetooth Control Diatance	15m

- Product design and specifications are subject to change without notice.

Warning

1. Always keep this product dry. Do not put it in high-temperature or in damp conditions.
2. Do not touch the product with wet hands. As this product doesn't have waterproof capability, please take measures of waterproof in rainy or damp environment.
3. Use of unauthorized power adapter may cause damage to the product and void the warranty.

Maintenance

1. If there is something wrong with the light when it is working, please turn it off first.
2. It is normal that the light gets a bit hot when it is working.
3. Maintenance must be performed by the authorized maintenance department which can provide original accessories.
4. This product, except for consumables, supports a one-year warranty.
5. Unauthorized service will void the warranty.
6. If the product had failures or was wetted, do not use it until it is repaired by professionals.
7. Changes made to the specifications or designs may not be reflected in this manual.

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference.

2. this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

Documents / Resources

	<p>SIRUI E30B Bi Color Soft LED Panel [pdf] User Manual</p> <p>E30B, 2AMTD-E30B, 2AMTDE30B, Bi Color Soft LED Panel, E30B Bi Color Soft LED Panel</p>
---	---