


SKYDANCE V1-N Mini Size Rf2.4g Wireless 75w Push-dim LED Controller User Manual

[Home](#) » [SKYDANCE](#) » SKYDANCE V1-N Mini Size Rf2.4g Wireless 75w Push-dim LED Controller User Manual 

SKYDANCE

Size Rf2 4g Wireless 75w Push-dim LED Controller
User Manual

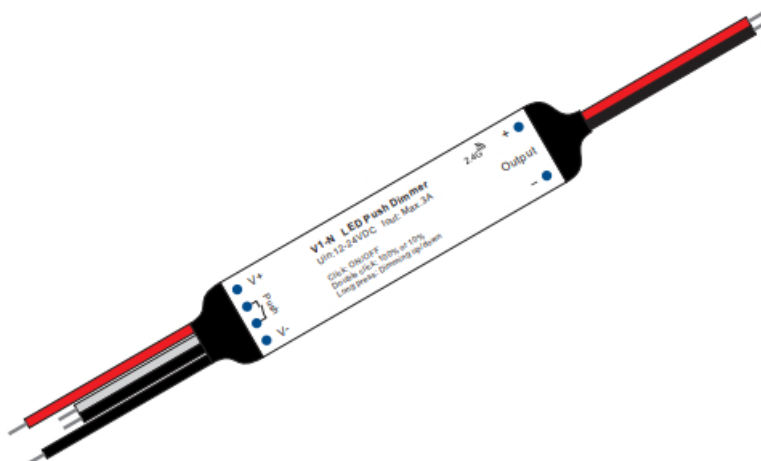

Contents

[1 RF Push Single Color LED Mini Controller](#)

[2 Features](#)

[3 Technical Parameters](#)

[4 Wiring Diagram](#)

[5 Match Remote Control](#)

[6 Malfunctions analysis & troubleshooting](#)

[7 Documents / Resources](#)

[8 Related Posts](#)

RF Push Single Color LED Mini Controller

Model No.: V1-N

1 channel constant voltage/Push-Dim/Max 75W/Step-less dimming/Wireless remote control

Features

- 1 channel constant voltage single color LED mini RF controller.
- 3A per channel, output connect with 5 meters single color LED strip, max output power 75W.
- Connect with push switch to achieve on/off and 0-100% dimming function.
- Match with RF 2.4G single zone or multiple zone dimming remote control optionally.
- One RF controller accept up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any ash.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.


Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	12-24VDC	Input signal	RF 2.4GHz	EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Output voltage	12-24VDC	Control distance	30m(Banierfree space)		
Output power	Max. 75W	Dimming gray scale	409612^121 levels	Safety standard(LVD)	EN 62368-1:2020 +A11:202C
Output type	Constant voltage	Dimming range	0 -100%	RadioEquipment(RED)	ETSI EN 300 328 V2.2.2
Environment 1		Dimming curve	Logarithmic	Certification	CE,EMC,LVD,RED
Operation temperature	To: -30°C – +55°C	PWM Frequency	500Hz (default)	Package L ala	
Case temperature (Max.)	To: +85°C	Warranty	5 years	Size	190x H 130mm
4			4.	Gross weight a	0.013kg

Dimension



Wiring Diagram

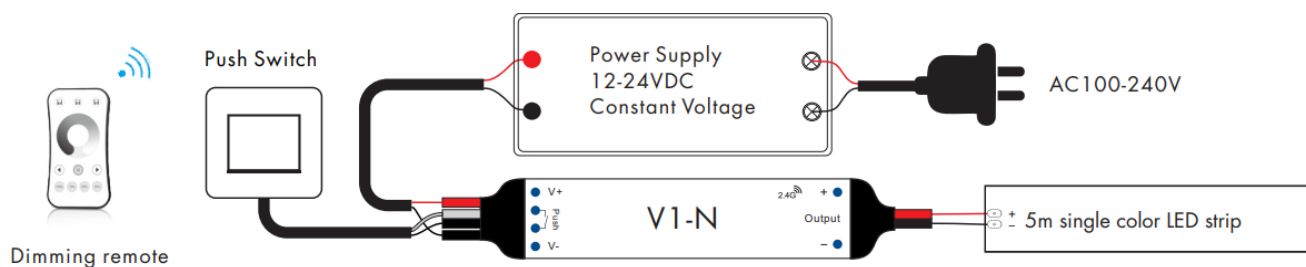

Push Dim function:

Click	ON/OFF
Double Click	Turn on at 100% or 10% (night light) and vice-versa
Long press(>1s) from OFF	Dimming UP/DOWN
Long press(>1s) from ON	Dimming UP/DOWN

Match Remote Control

Match:

Switch off the power, then switch on power.

Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.


Delete:

Switch off the power, then switch on power.

Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

Another way to match:

The receiver is power on for five consecutive times, the LED strip light start blinking slowly for 10s, Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) on the remote. The light blinks 3 times means match is successful.

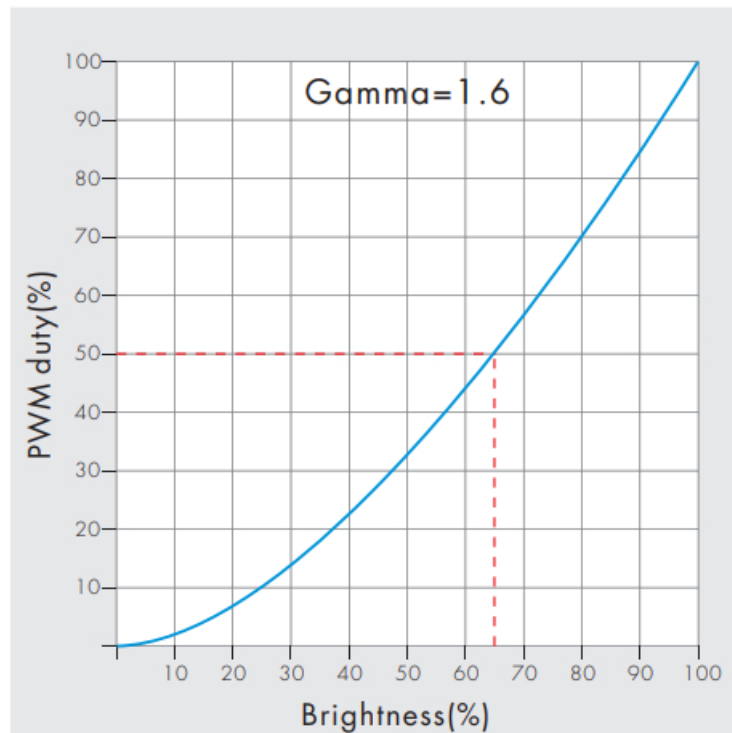Dimming Curve**Malfunctions analysis & troubleshooting**

Malfunctions	Causes	Troubleshooting
No light	1. No power. 2. Wrong connection or insecure.	1. Check the power. 2. Check the connection.
Malfunctions No light	1. The battery has no power. 2. Beyond controllable distance. 3. The controller did not match the remote.	1. Replace battery. 2. Reduce remote distance. 3. Re-match the remote.

Installation Precautions

1. The products shall not be stacked, the distance should be $\geq 20\text{cm}$, so as not to affect lifespan of the products due to poor heat dissipation.
2. The product shall not be installed close to the switching power supply with an interval of $\geq 20\text{cm}$ to avoid the radiation interference of the switching power supply.
3. The installation height shall be $\geq 1\text{m}$ from the oor to avoid shortening the remote control distance due to too

weak reception signal.

4. The products are not allowed to be close to or covered by metal objects, with an interval of $\geq 20\text{cm}$ to avoid signal attenuation and shorten the remote control distance.
5. Avoid installation at the corner of the wall or the corner of the beam, with an interval of $\geq 20\text{cm}$ to avoid signal interference.

SKYDANCE

Documents / Resources

	<p>SKYDANCE V1-N Mini Size Rf2.4g Wireless 75w Push-dim LED Controller [pdf] User Manual</p> <p>V1-N, Mini Size Rf2.4g Wireless 75w Push-dim LED Controller, Wireless 75w Push-dim LED Controller, Mini Size Rf2.4g LED Controller, LED Controller, Controller</p>
---	--

[Manuals+](#).