


# SKYDANCE WB5 Bluetooth and RF 5 In 1 LED Controller Owner's Manual

[Home](#) » [SKYDANCE](#) » SKYDANCE WB5 Bluetooth and RF 5 In 1 LED Controller Owner's Manual

# SKYDANCE WB5 Bluetooth and RF 5 In 1 LED Controller Owner's Manual

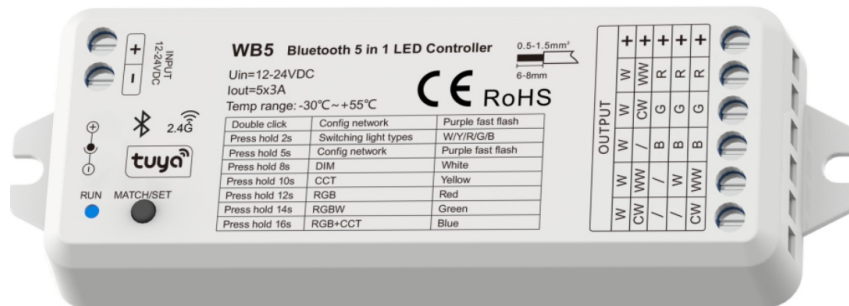

## Contents

- 1 Features
- 2 Technical Parameters
- 3 System wiring
- 4 Mechanical Structures and Installations
- 5 Wiring Diagram
- 6 Tuya APP network connection
- 7 Tuya APP interface
- 8 WB5 match remote control (Optional)
- 9 WB5 work as Bluetooth-RF converter to match RF LED controller or dimming driver
- 10 RGB dynamic mode list
- 11 Documents / Resources
  - 11.1 References
- 12 Related Posts

## Features

- 5 in 1 function, used for control RGB, RGBW, RGB+CCT, color temperature or single color LED strip.
- DC power socket input and 5 channel constant voltage output.

- Tuya APP cloud control, support on/off, RGB color, color temperature and brightness adjust, delay turn on/off light, timer run, scene edit and music play function.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- Match with RF 2.4G remote control optional.
- User need set light type by press key before Tuya APP network connection and match RF remote of the same light type.
- Each WB5 controller can also work as Bluetooth-RF converter, then use Tuya APP to control one or more RF LED controller or RF LED dimming driver synchronously.
- Light on/off fade time 3s delectable.

## **Technical Parameters**

Input and Output	
Input voltage	12-24VDC
Input current	15.5A
Output voltage	5 x (12-24)VDC
Output current	5CH, 3A/CH
Output power	5 x (36-72)W
Output type	Constant voltage
Environment	
Operation temperature	Ta: -30 O C ~ +55O C
Case temperature (Max.)	Tc: +85 O C
Dimming data	
Input signal	Tuya APP+RF 2.4GHz
Control distance	30m(Barrier-free space)
Dimming gray scale	4096 (2 <sup>12</sup> ) levels
Dimming range	0 -100%
Dimming curve	Logarithmic
PWM frequency	1000Hz (default)
Package	
Size	L120 x W43 x H35mm
Gross weight	0.055kg
Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard(LVD)	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certication	CE,EMC,LVD,RED
Warranty and Protection	
Warranty	5 years
Protectio	Reverse polarity Over-heat Short circuit

## System wiring




- For RGBW

### RGBW remote



Press and hold match/set key for 14s, until the RUN LED indicator turn green, then release, the controller will become RGBW type, then do smart cong by tuya APP, or short press match key to match with RGBW RF remote.

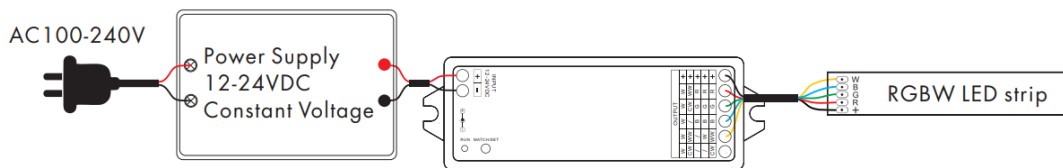


- For RGB

### RGB remote



Press and hold match/set key for 12s, until the RUN LED indicator turn red, then release, the controller will become RGB type, then do smart cong by tuya APP, or short press match key to match with RGB RF remote.

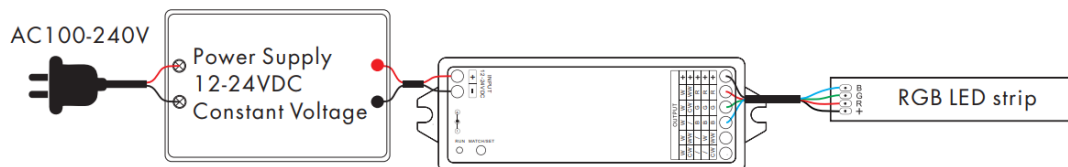


- For dual color CCT

### CCT remote



Press and hold match/set key for 10s, until the RUN LED indicator turn yellow, then release, the controller will become CCT type, then do smart cong by tuya APP, or short press match key to match with CCT RF remote.

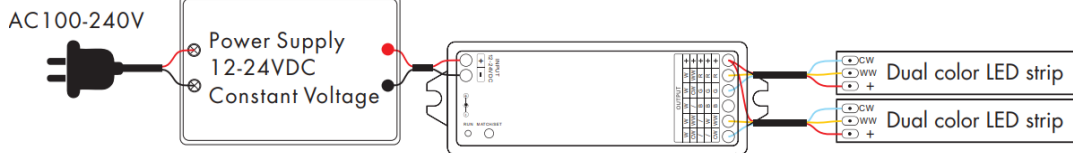


### • For single color

Dimming remote



Press and hold match/set key for 8s, until the RUN LED indicator turn white, then release, the controller will become DIM type, then do smart cong by tuya APP, or short press match key to match with dimming RF remote.

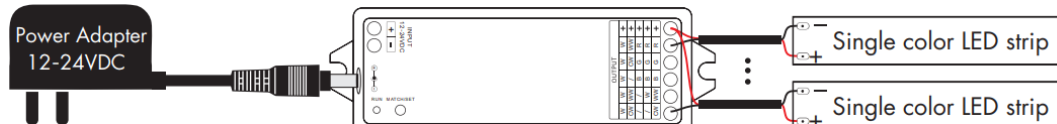

### Note:

1. User can connect constant voltage power supply or power adapter as power input.
2. Press and hold Match/Set key for 2s, switch 5 kinds light type in sequence.
3. For RGB+CCT or CCT light type, continuous power on and off will change 3 levels color temperature (WW, NW and CW) in sequence.
4. Switch off the power, then switch on power, repeat again. Immediately short press match key 3 times, the light on/off time will change between 3s and 0.5s.

### Tuya APP network connection

Press and hold Match/Set key for 2s:

Switch 5 kinds light type in sequence, notice this operation does not automatically clear previous network connection.

Press and hold Match/Set key for 5s, or push twice Match/Set key fastly, or when press and hold Match/Set key for 8-16s to set 5 kinds light type:


Clear previous network connection, enter config mode, the purple LED indicator fast flash, the output LED will flash 10 times.

Repeat power on and off for 5 consecutive times, also clear previous network connection, enter config mode, the output LED will flash 10 times.

If Tuya APP network connection succeed, the RUN LED indicator will stop flash purple, and turn corresponding light type color (**White**: DIM, Yellow: CCT, Red: RGB, Green: RGBW, Blue: RGB+CCT). and in Tuya APP, you can find BT-RGB+CCT device (or other DIM, CCT, RGB or RGBW).

## Tuya APP interface

### White interface

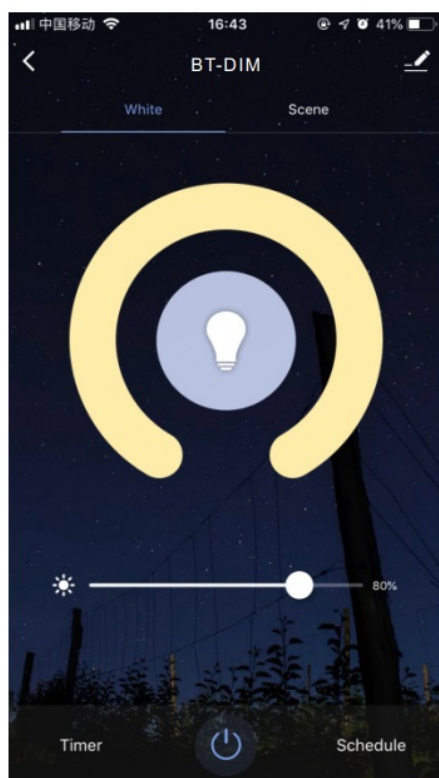

#### For DIM type:

Touch brightness slide to adjust brightness.


#### For RGB type:

Touch brightness slide, get RGB mixed white firstly, then to adjust white brightness.

#### For RGBW type:

Touch brightness slide, adjust white channel brightness.

### Color temperature interface

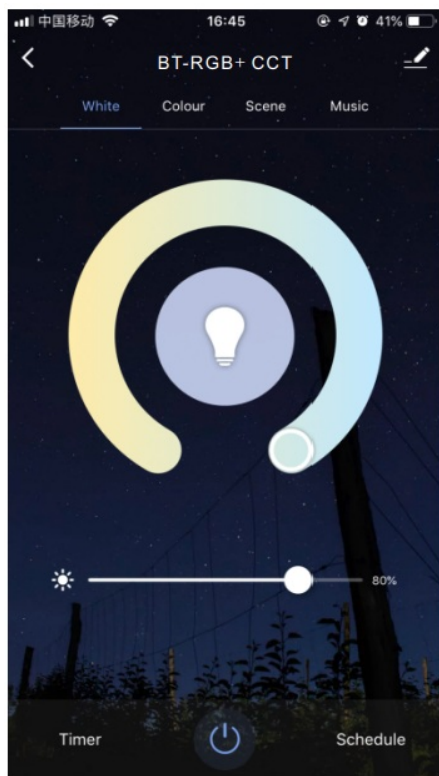

### For CCT type:

Touch color wheel to adjust color temperature.  
Touch brightness slide to adjust brightness.


For RGB+CCT type:

Touch color wheel to adjust color temperature,

RGB will turn off automatically.  
Touch brightness slide to adjust white brightness.

### Colour interface



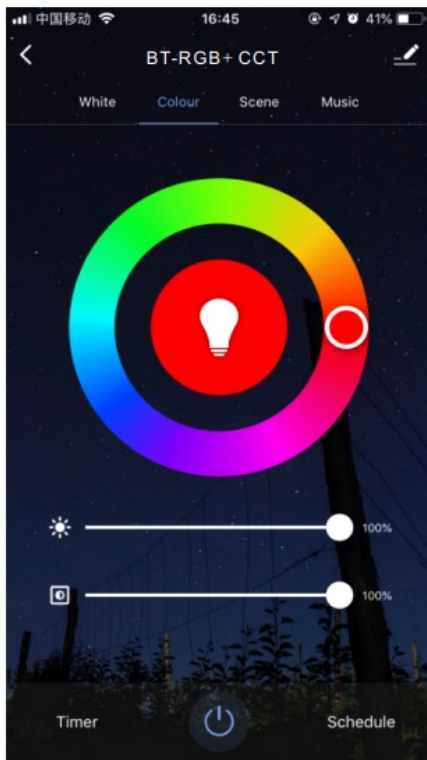

### For RGB or RGBW type:

Touch color wheel to adjust static RGB color.  
Touch brightness slide to adjust color brightness.  
Touch saturation slide to adjust color saturation,  
namely gradient from the current color to white(RGB mixed).

### For RGB+CCT type:

Touch color wheel to adjust static RGB color, WW/CW will turn off automatically.  
Touch brightness slide to adjust color brightness.  
Touch saturation slide to adjust color saturation,  
namely gradient from the current color to white (RGB mixed)


### Scene interface



The 1-4 scene is static color for all light type. the inner color of these scene can be editable.

The 5-8 scene is dynamic mode for RGB, RGBW, RGB+CCT type, such as green fade in and fade out, RGB jump, 6 color jump, 6 color smooth.

### Music, Timer, Schedule

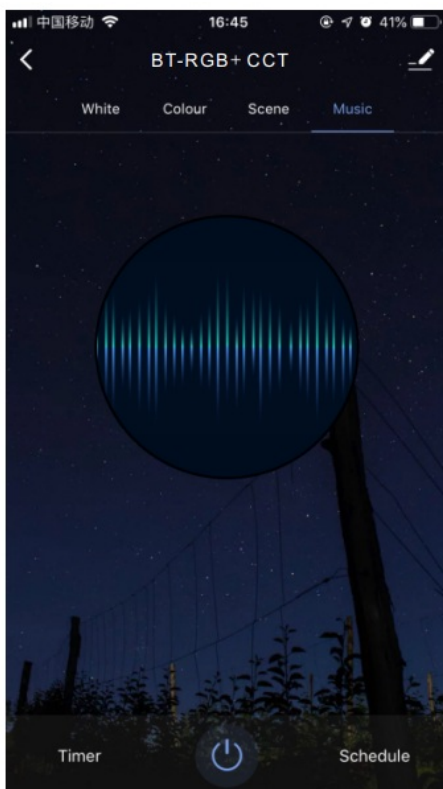

The music play can use smart phone music player or micro-phone as music signal input.

The Timer key can turn on or turn off light in the next 24 hours.

The Schedule key can add multiple timers to turn on or turn off light according to different time periods.

## **WB5 match remote control (Optional)**

End user can choose the suitable match/delete ways. Two options are offered for selection:

### **Use the controller's Match key**

#### **Match:**

Short press match key of WB5, immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote.

The LED indicator fast flash a few times means match is successful.

#### **Delete:**

Press and hold match key of WB5 for 20s,

The LED indicator fast flash a few times means all matched remotes were deleted.

### **Use Power Restart**

#### **Match:**

Switch off the power of WB5, then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.

#### **Delete:**

Switch off the power of WB5, then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

## **WB5 work as Bluetooth-RF converter to match RF LED controller or dimming driver**

End user can choose the suitable match/delete ways. Two options are offered for selection:

### **Use the controller's Match key**

#### **Match:**

Short press match key of the controller, immediately press on/off key on the Tuya APP.

The LED indicator fast flash a few times means match is successful.

#### **Delete:**

Press and hold match key of the controller for 5s,

The LED indicator fast flash a few times means match was deleted.

### **Use Power Restart**

#### **Match:**

Switch off the power of the controller, then switch on power, repeat again.  
Immediately short press on/off key 3 times on the Tuya APP.

The light blinks 3 times means match is successful.

#### **Delete:**

Switch off the power of the controller, then switch on power, repeat again.  
Immediately short press on/off key 5 times on the Tuya APP.

The light blinks 5 times means match was deleted.

### **RGB dynamic mode list**

#### **For RGB/RGBW:**

<b>No.</b>	<b>Name</b>
1	RGB jump
2	RGB smooth
3	6 color jump
4	6 color smooth
5	Yellow cyan purple smooth
6	RGB fade in and out
7	Red fade in and out
8	Green fade in and out
9	Blue fade in and out
10	White fade in and out

#### **For RGB+CCT:**

No.	Name
1	RGB jump
2	RGB smooth
3	6 color jump
4	6 color smooth
5	Color temperature smooth
6	RGB fade in and out
7	Red fade in and out
8	Green fade in and out
9	Blue fade in and out
10	White fade in and out

### **FCC Warning**

#### **Labeling requirements.**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### **Information to user.**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### **Information to the user.**

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### **FCC RF Radiation Exposure Statement:**


1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

2. This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

---

## Documents / Resources

	<p><a href="#">SKYDANCE WB5 Bluetooth and RF 5 In 1 LED Controller</a> [pdf] Owner's Manual 2BDBM-WB5, 2BDBMWB5, WB5, WB5 Bluetooth and RF 5 In 1 LED Controller, Bluetooth and RF 5 In 1 LED Controller, RF 5 In 1 LED Controller, LED Controller, Controller</p>
---	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.