



# Smart Door Locks SDL-K12 Smart KeyBox with App User Guide

[Home](#) » [Smart Door Locks](#) » Smart Door Locks SDL-K12 Smart KeyBox with App User Guide 

## Contents

- [1 Smart Door Locks SDL-K12 Smart KeyBox with App](#)
- [2 Install Battery](#)
- [3 Download Mobile App](#)
- [4 Mechanical Instructions](#)
  - [4.1 Password & Factory Mode](#)
- [5 Password Length](#)
- [6 Bluetooth broadcasting & re-connecting:](#)
- [7 App Instructions](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)


**SMART**Doorlock

**Smart Door Locks SDL-K12 Smart KeyBox with App**




## Install Battery

Remove the (4) screws on the battery cover

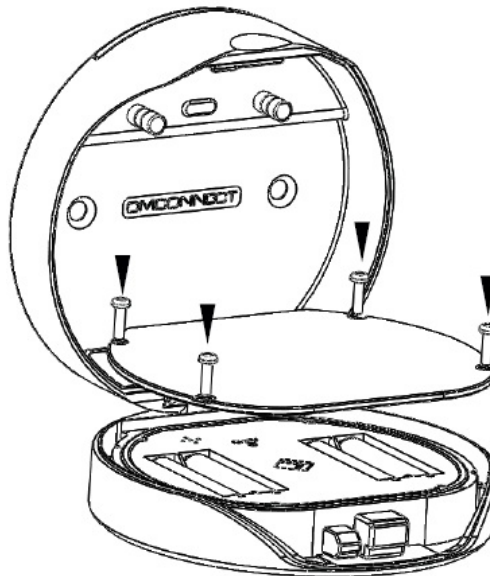

Put 4 AAA batteries into the battery dock

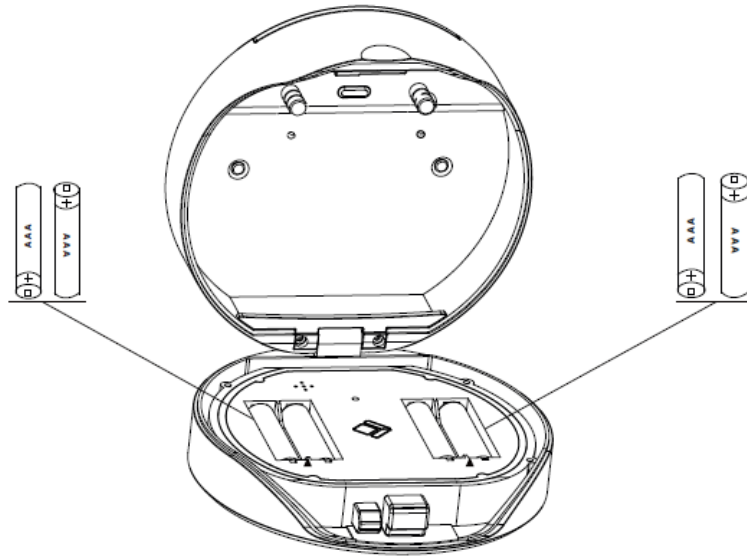

## Download Mobile App




Scan QR Code below and download the App and turn on your mobile Bluetooth




## Add Device


Go to App Home page, click Add Device or click “+” on the upper right.




Press +9+ and enter Admin password +, when the light slowly blinks in blue the KeyBox is ready to pair

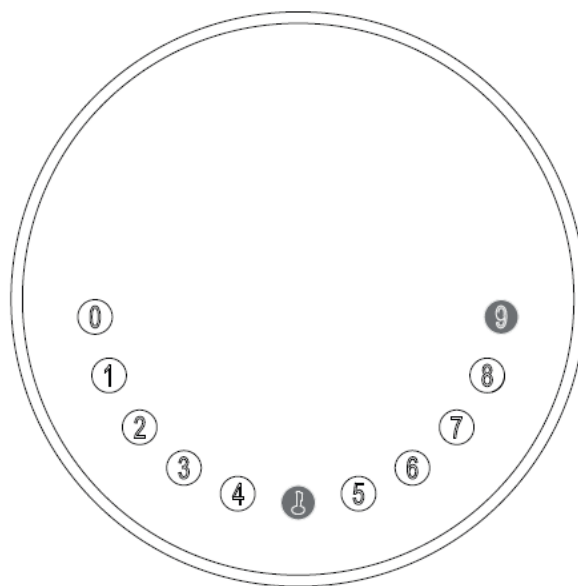


You will see the detected device and click “Go to add”.

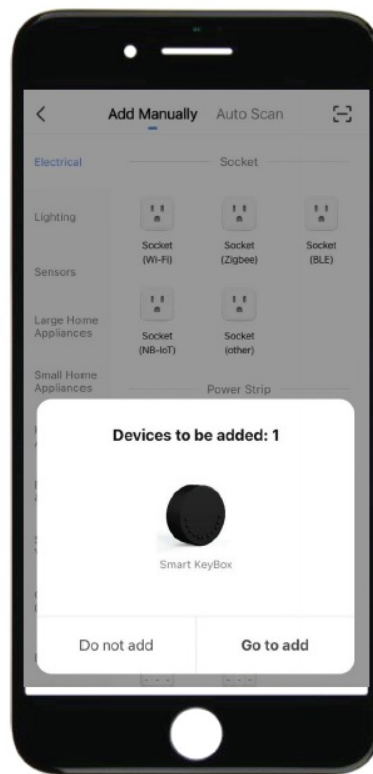


Connecting, you need to wait for few seconds to let it finish

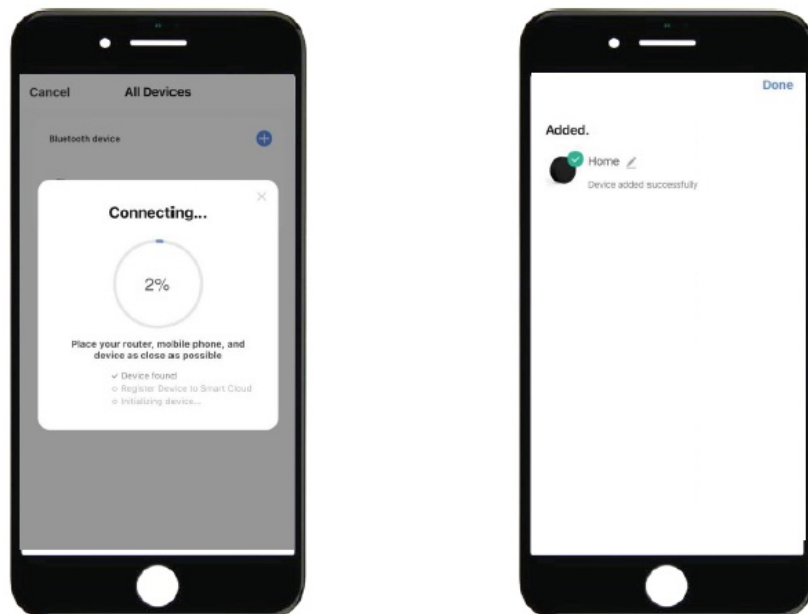


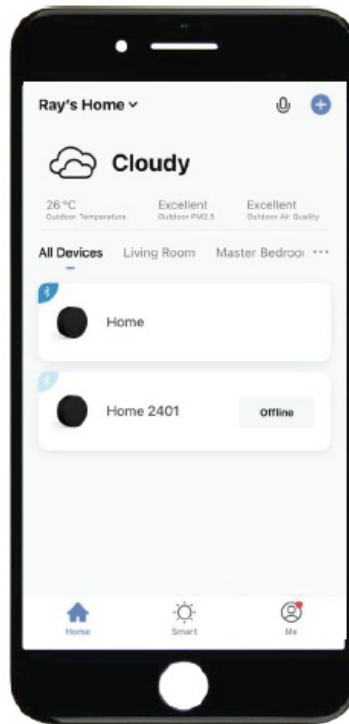


Device added



## Change Admin Password-Initial Admin Password:123456

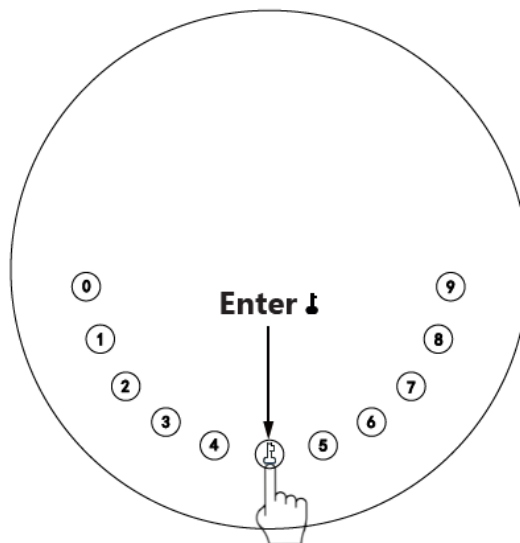Press  and hold for 3 beeps



Right after the 3 beeps please key in Initial Admin Password +  +new admin password+  +new admin password 



## Mechanical Instructions





### Password & Factory Mode

### Password Length



Password must be 6 digits (no more no less)





## Add User Password

Press  + 0 +  until the blue light blinks




- Enter admin password + 
- Enter new user password + 
- Enter new user password again and press 
- When the  (Enter button) blinks in green, user password has been set.

## Delete User Password

Press  + 2 +  until the blue light blinks

- Enter admin password and press 
- Enter the user password you wish to delete and press 
- Enter the user password again and press 
- When the (Enter button) blinks in green the password has been deleted. 

## Delete All User Password

- Press  + 00000 +  until the blue light blinks
- Enter admin password and press 
- When the (Enter button) blinks in green all passwords have been deleted

## Virtual digits-Anti Peeping

Add any digits before and after the correct password the KeyBox unlock as always

## System Lockdown

KeyBox will Lockdown for 5 minutes if entering wrong password continuously 5 times

## Reset Factory Mode


Press and hold the reset button for 5 seconds and with a long beep

### **Bluetooth broadcasting & re-connecting:**

Press any key to activate the Bluetooth, App&Device will get reconnected each other.  
Bluetooth broadcasting will turn to sleep mode if no operations within 1 minute.


### **App Instructions**

- You will see all devices and rooms on the home page.
- Tap the Device to start operating.
- Tap “Me” at the bottom to manage your home

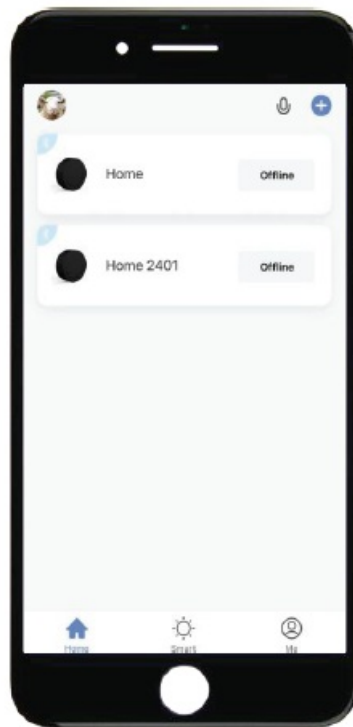


- Touch the lock sign to unlock and lock.
- Tap “Bell” sign to check the alarm records.
- Tap “Member Management to add or delete members.
- Tap “opening record” to check opening logs.
- Tap “Intelligent Linkage” to turn on and off go home mode.
- Tap “Set” to manage passwords




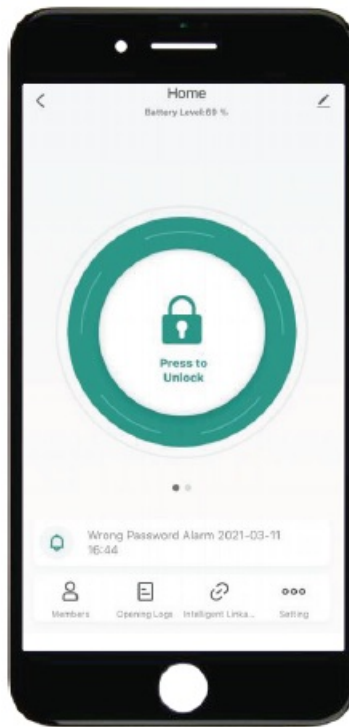


- Tap “Get dynamic code” to get a code.
- Tap “copy code” and send it to friend or family.
- Tap “Pen” sign to edit your personal information

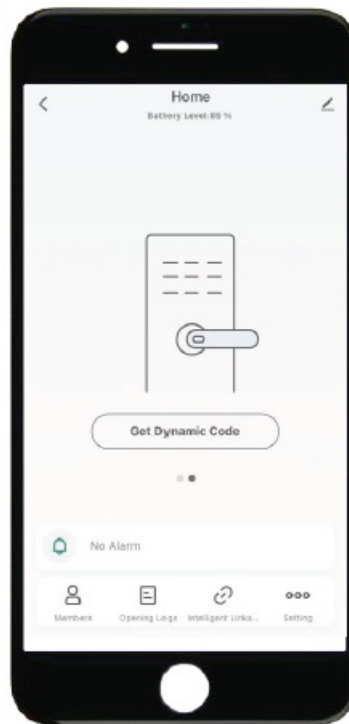


- Go to “Members” to add family or other members

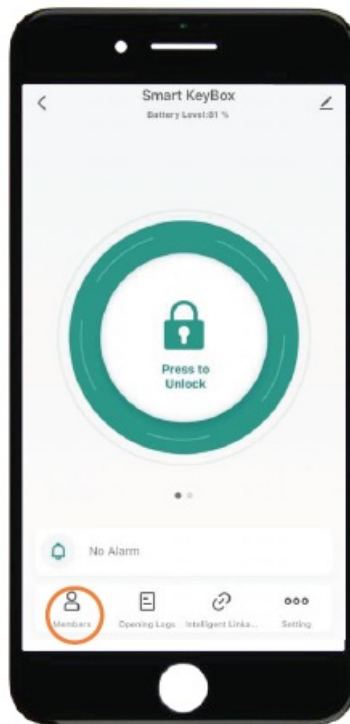


- Tap “+” to add family member or other members

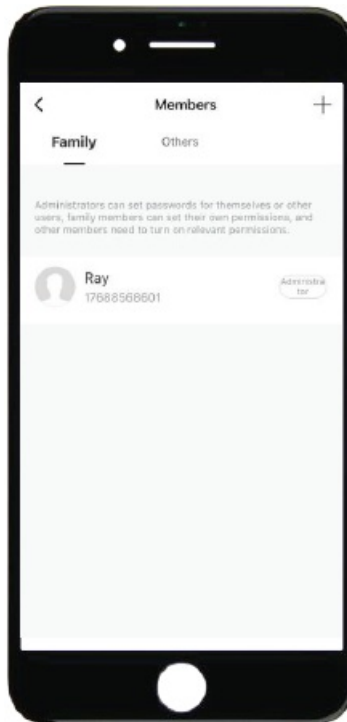


- Tap “ Add it now” under Family to add family members

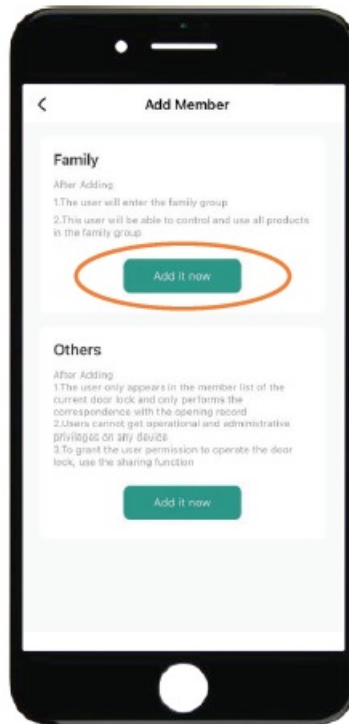


- Owner need to complete the Home information before adding any family member if required
- The member need to be registered to the App before adding as a family member

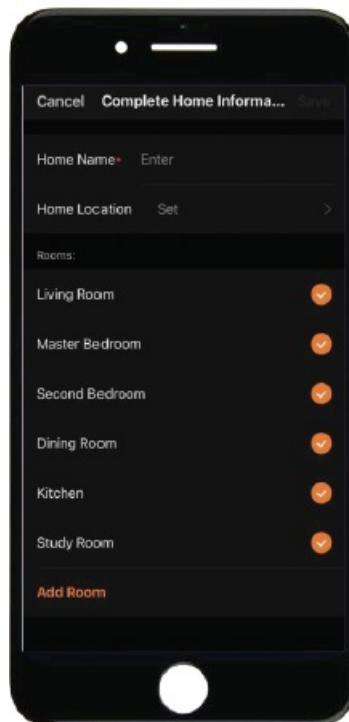


- Fill up member information and set the role of the member
- Tap “Save” to complete and the member will be able to operate the device on his App

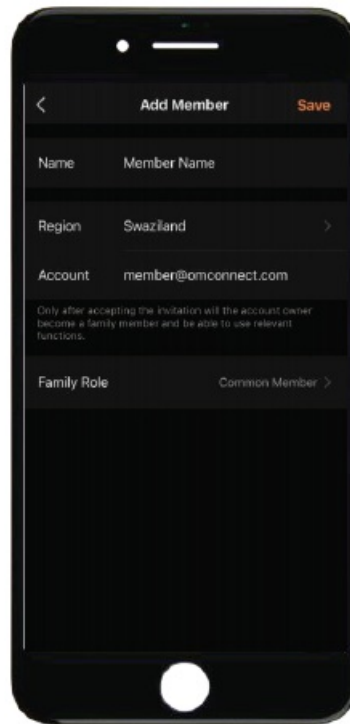


- Go to “Opening Logs” to check the unlocking history
- With this feature you will be able to find out when and who unlocked the KeyBox

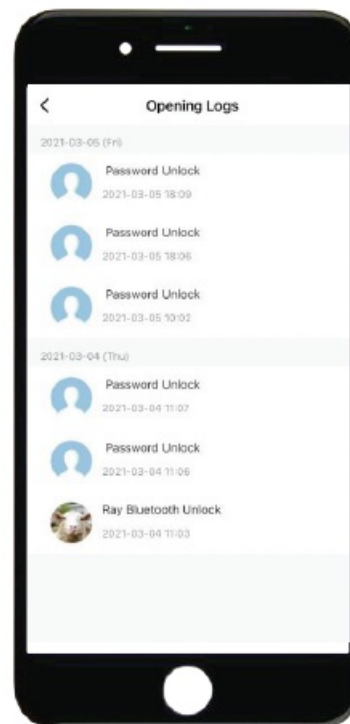


- Go to “Intelligent Linkage” to set more smart functions
- Tap the green bar to turn on “Family go home”function.
- Tap the orange bar to turn on “Door lock alarm”function
- You will get notification if user unlocked with Bluetooth
- Go to “me” homepage and got to message center to check the records.

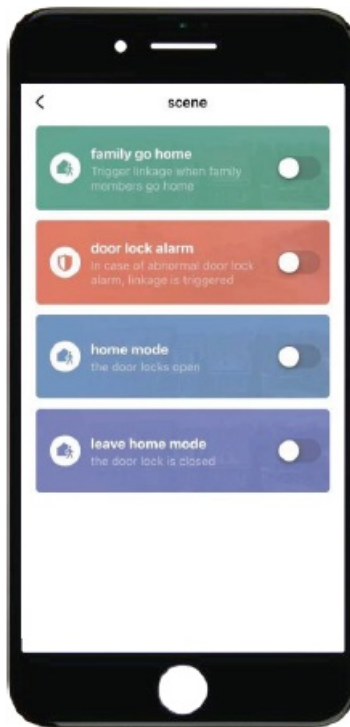


- Tap “password management” to add or remove codes.
- Tap “Temporary code” to manage online and offline codes

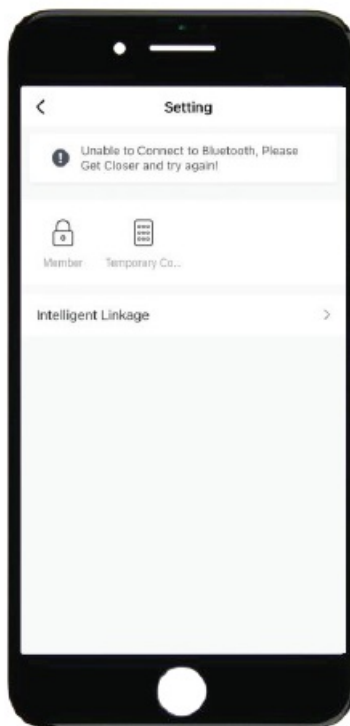

- Tap “one-time code” under Online Code to set an online one time code.
- Tap “periodic Code” under Online Code to set a online code which will be available in a period of time.
- Tap “One-Time Code” under Offline Code to generate a one time offline code which will be a 10 digits code and use it when the device is offline.
- Tap “Offline Temporary Code” under Offline Code to generate an offline code (10 digits) which will be available in a period of time, and use when the device is offline or Bluetooth disconnected with device.
- Tap “Clear Code” to generate a code (10 digits) which is able to clear Codes that need to be invalid or clear all codes.
- Please note if the code less than 10 digits you need to regenerate a new code, the code must be 10 digits

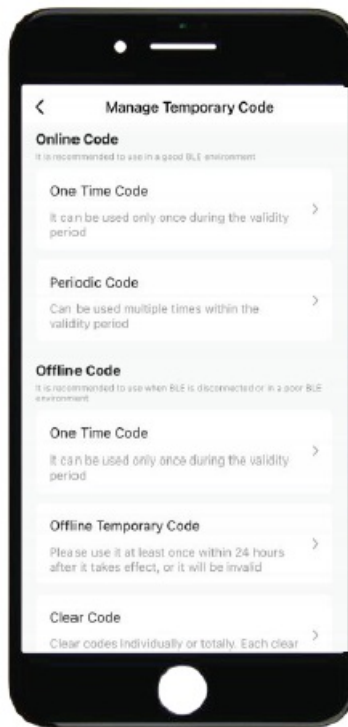

## Documents / Resources

 <p><b>Quick Start</b> <b>Step 1: Insert Battery</b> → Remove the battery cover. → Put 4 AAA batteries into the battery slot.</p>	<p><a href="#">Smart Door Locks SDL-K12 Smart KeyBox with App</a> [pdf] User Guide SDL-K12 Smart KeyBox with App, SDL-K12, Smart KeyBox with App, Smart KeyBox, Smart KeyBox App</p>
---	--