

[Manuals.plus](#) /

> [Maxcio](#) /

> Maxcio RF Remote Control for WiFi Shutter Switch Relay User Manual

Maxcio QS-WIFI-SC02-RF

Maxcio RF Remote Control for WiFi Shutter Switch Relay User Manual

Model: QS-WIFI-SC02-RF

INTRODUCTION

This manual provides detailed instructions for the proper setup, operation, and maintenance of your Maxcio RF Remote Control for WiFi Shutter Switch Relays. Please read this manual thoroughly before use to ensure optimal performance and safety.

Compatibility Note:

This RF remote control is exclusively designed for the MAXCIO RF WiFi shutter relay. It is not compatible with other brands of switches or other Maxcio shutter switches.

SETUP

1. Battery Installation

The remote control contains a CR2430 button cell battery. Before first use, remove the plastic insulating film to activate the battery.

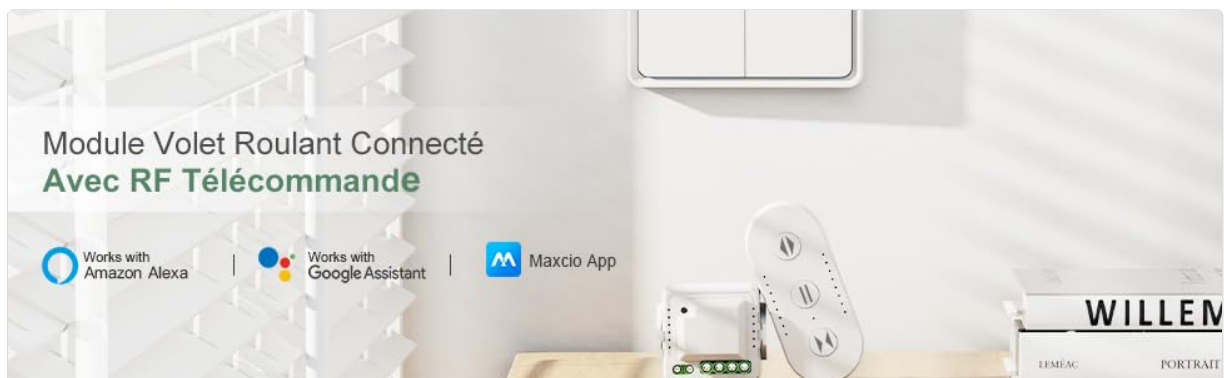


Image: Remove the plastic insulating film from the battery before using the remote control.

Important:

For effective reception of RF remote commands, ensure the side of the battery with the small white square is facing outwards during installation.

2. Pairing Instructions

To pair the remote control with your Maxcio RF WiFi shutter module:

1. Ensure the Maxcio RF WiFi shutter module is powered on and ready for pairing.
2. Press and hold the **Up** button on the remote control for 5 seconds.
3. The indicator light on the curtain module will flash twice upon successful pairing.

OPERATING THE REMOTE CONTROL

General Operation

Once the RF remote control is successfully paired with the curtain module, you can control the shutter even if the module is not connected to Wi-Fi.

- Press the **Up** button to open the shutter.
- Press the **Middle** button to stop the shutter.
- Press the **Down** button to close the shutter.

Pairing Limits

- One remote control can be paired with multiple curtain modules.
- A single curtain module can only be paired with a maximum of 3 remote controls.

MAINTENANCE

Battery Replacement

When the remote control's performance degrades or it stops responding, the CR2430 button cell battery may need replacement.

1. Carefully open the remote control's battery compartment.
2. Remove the old CR2430 battery.
3. Insert a new CR2430 battery, ensuring the positive (+) side (the side with the small white square) is facing outwards.
4. Close the battery compartment securely.

Disposal Warning:

Dispose of used batteries according to local regulations. Keep button cell batteries out of reach of children.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Remote control not responding.	Battery is dead or incorrectly installed.	Replace the CR2430 battery, ensuring correct polarity. Remove insulating film if it's a new battery.
Remote control not pairing with the module.	Incorrect pairing procedure or module is already paired with maximum remotes.	Ensure you press and hold the 'Up' button for 5 seconds. Verify the module is not already paired with 3 remotes. Refer to the module's manual for unpairing existing remotes if necessary.
Limited range or intermittent control.	Low battery or interference.	Replace the battery. Ensure there are no significant obstructions between the remote and the module.

SPECIFICATIONS

- **Brand:** Maxcio
- **Model Number:** QS-WIFI-SC02-RF
- **Product Weight:** 30 g
- **Dimensions:** 75mm x 32mm x 16mm
- **Battery Type:** CR2430 Button Cell (included)
- **Style:** Remote Control

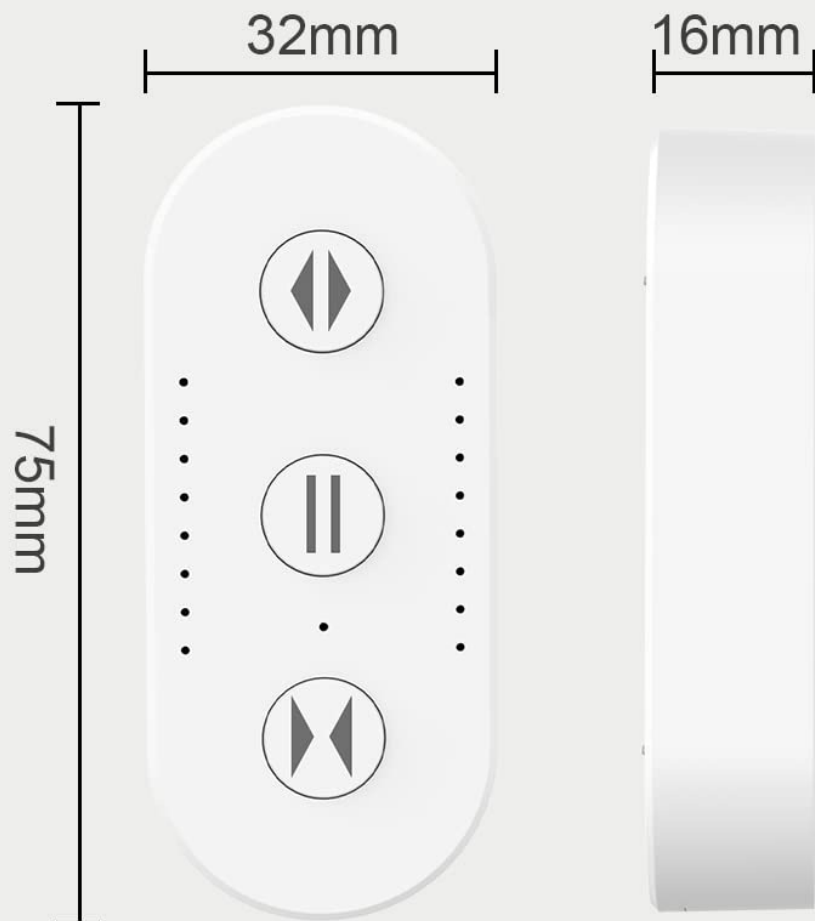


Image: Dimensions of the Maxcio RF Remote Control.

WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation provided with your Maxcio RF WiFi Shutter Switch Relay module or visit the official Maxcio website. Keep your purchase receipt for warranty claims.

