



solis WiFi Stick Datalogger Installation Guide

[Home](#) » [solis](#) » solis WiFi Stick Datalogger Installation Guide 



**WiFi Stick Datalogger
Quick Installation Manual
Version: 3.6**



- 1 WiFi stick
- 1 WiFi Antenna
- 1 Quick Installation Manual

Contents

- [1 Install](#)
- [2 LED and Button](#)
- [3 WiFi Configuration](#)
- [4 Create the Solis Cloud Account](#)
- [5 Create Plant](#)
- [6 FCC Certification](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Install

1.1 Install the datalogger

Connect the datalogger to the corresponding 4-pin COM port of the inverter. A Solis 5K inverter is used here as an example. Please follow the instructions below:



Install the datalogger:

1. Install the antenna to the datalogger.
2. Match the joint, and then insert the datalogger to the inverter COM port.
3. Rotate the black ring in clockwise.



2




3

NOTE

Only rotate the black ring at the connection end, not rotate the silver cover.

1.2 Install with multiple inverters

If you need to collect data from multiple inverters, please follow the inverter user manual to establish a communication connection with the inverter using the RS485 communication cable in a “daisy chain” manner.

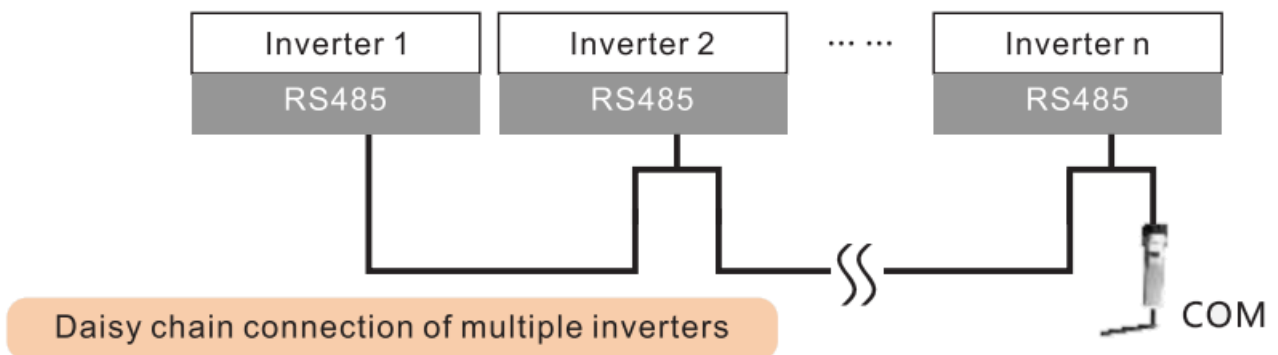




After the datalogger is installed on the inverter, if the inverter is powered on, you need to set the inverter slave address, the default slave address of the inverter is 01, and each inverter on the communication circuit needs to be assigned with different slave address (like 01,02,03,04...).

NOTE

The device must be installed away from the strong magnetic field produced by large electrical appliances such as microwave oven, refrigerator, telephone, metal walls, etc. Otherwise, the communication quality may be affected. It may also be affected by lightning storm.

LED and Button

LED Lights Status:

LED indicators	Description	LED Status	Meanings
 Internet Indicators T i (NET)	Shows the connection status between the datalogger and the server .	Flashing	Trying to connect with server
		ON	Successfully connected
		OFF	Abnormal connection
 Inverter COM Indicators (COM)	Shows the connection status between datalogger and the inverter.	Flashing	Trying to connect with inverter
		ON	Successfully connected
		OFF	Abnormal connection
 Power Indicator •(PWR)	Shows the power supply status of the datalogger.	ON	Datalogger is powered up normally
		OFF	Datalogger is powered up abnormally

Button Instruction:

The [RESEM button on the back is used for connection. • Short press will send the data immediately. •Long press for 5 seconds will enter into config mode for connection router. -Long press for 10 seconds will reset the connection. The three constantly ON LED lights indicate the datalogger is working normally.


WiFi Configuration

Step 1: Use you phone to scan the QR code to download and register the Solis Cloud APP. Or directly download from APP Store or Google Play Store by searching “Solis Cloud”.



Solis Cloud


Step 2: If it is anew datalogger, please configure it first, then click the “WiFi Configuration”.

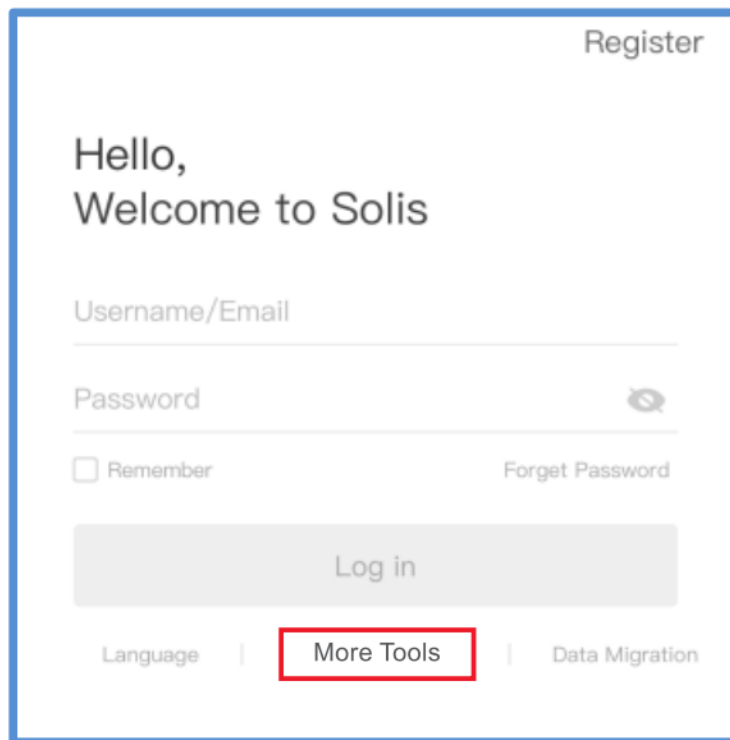

Register

Hello,
Welcome to Solis

Username/Email


Password 





☐ Remember [Forget Password](#)

Log in

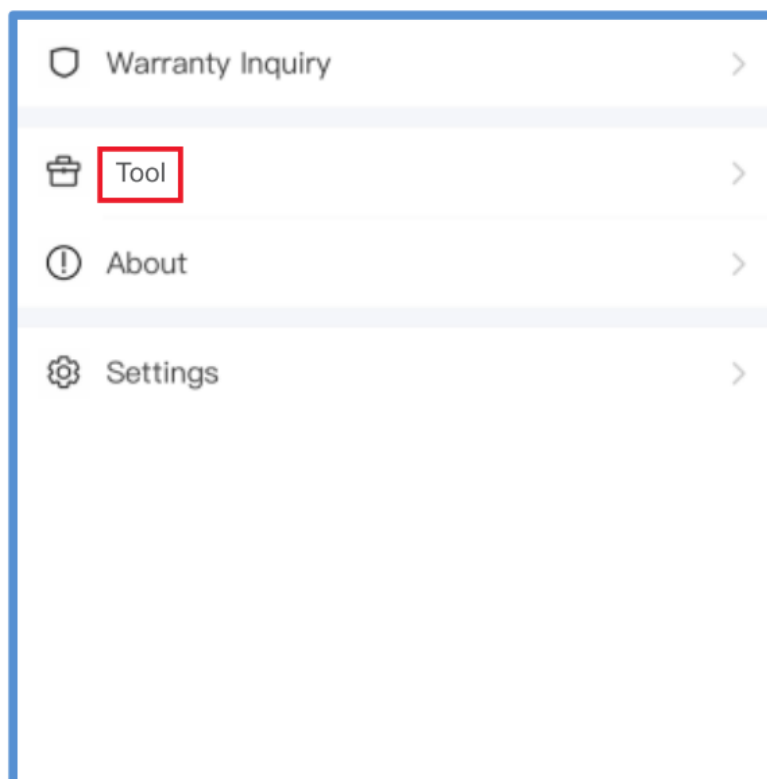Language | **More Tools** | Data Migration


Unlogged account, click on "More Tools" and select "WiFi Configuration"




-  Warranty Inquiry >
-  **Tool** >
-  About >
-  Settings >

If you have logged in, please click "Tool" to enter "WiFi Configuration"

Step 3 : Manually input datalogger SN or Scan the SN on the datalogger.

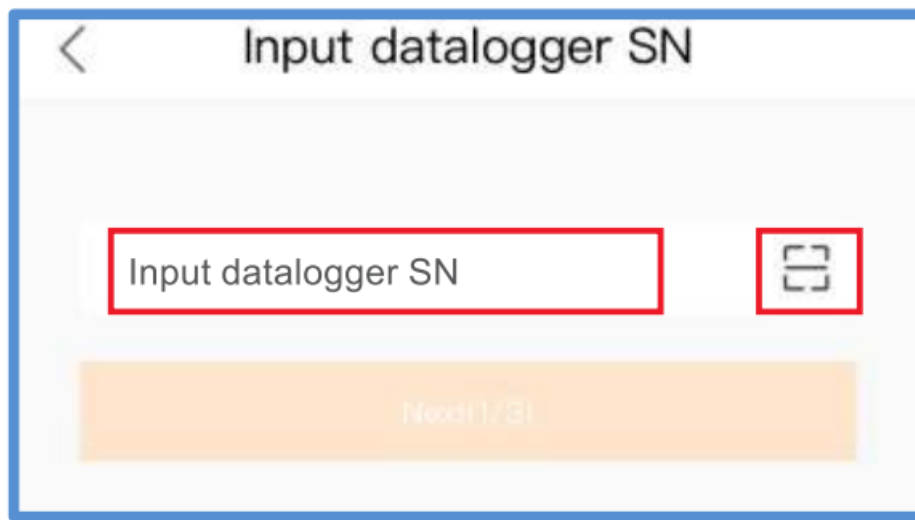

Step 4: Choose the configuration method, recommended click “Browser Configuration”.

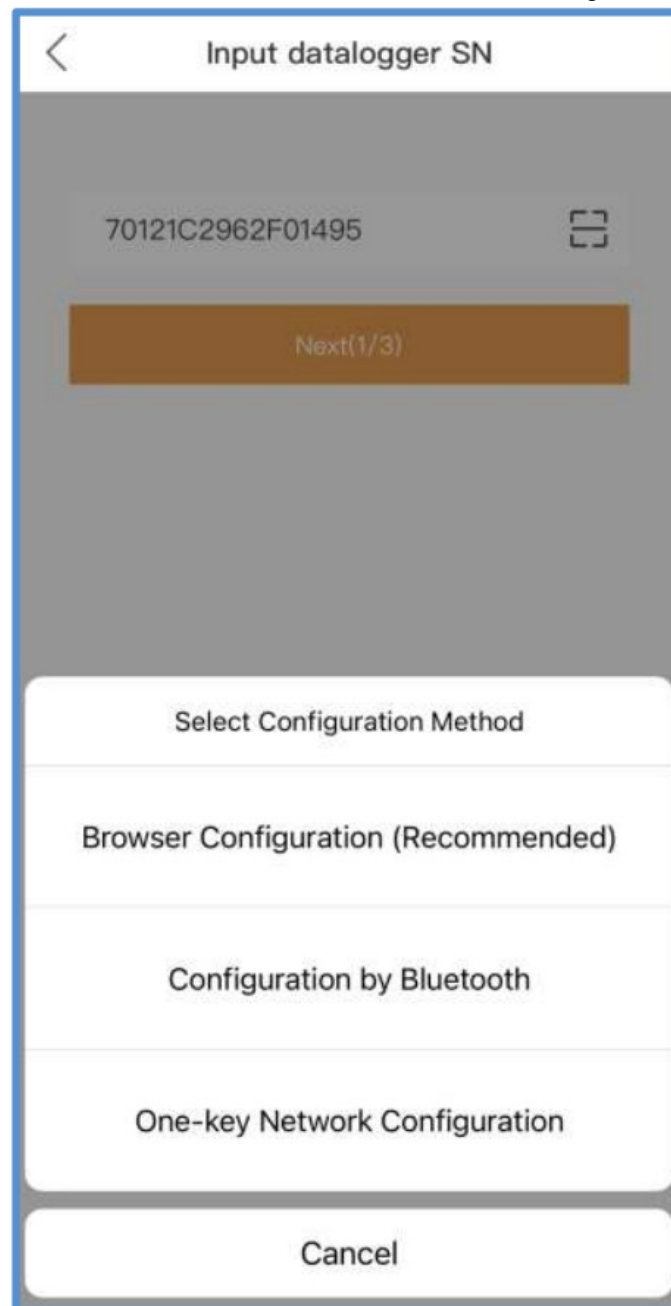

Step 5 : Long press the “Reset” button for 5 seconds until the yellow and green LEDs are quickly flashing. Then click the “I’m sure i t is flashing”.



Configuration Tip




Please turn on the configuration mode of the datalogger

Plug the datalogger into the inverter and wait for the indicator light of the datalogger to be stable. That means, the red light on the datalogger keeps on, and the green light flashes every second, as shown in the figure above. Then you can start connecting to the WiFi signal of the logger, click to ["view the tutorial"](#):


- (1) Make sure that the green light of the datalogger flashes at intervals. If the WiFi signal is not found, try re-plug the datalogger;
- (2) If the WiFi signal still can not be found, please long-press the datalogger for over 10 seconds to restore to the default setting, wait for the indicator light of the datalogger to be stable, and click to [view the tutorial](#);
- (3) If the datalogger is connected to the network, but the network needs to be changed, please follow the method 2
- (4) If the network is not found after multiple attempts of the above methods, please replace the datalogger.

[I'm sure it is flashing](#)

Step 6 : Connect to the datalogger network Solis.

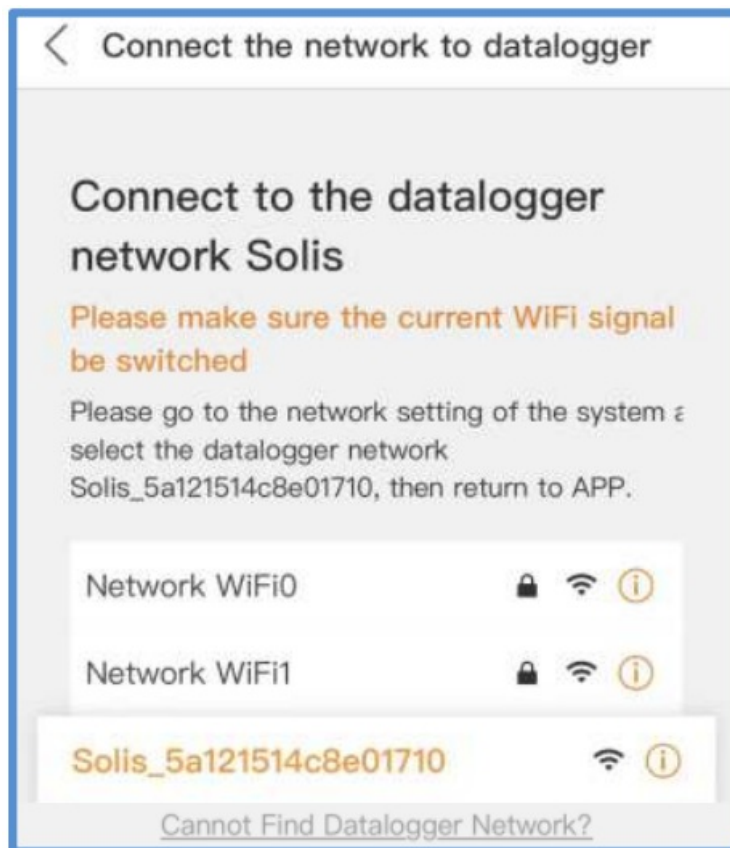

Step 7 : The wireless device(mobile phone or laptop) connects to the datalogger hotspot(Solis_serial number). The default password is 123456789.

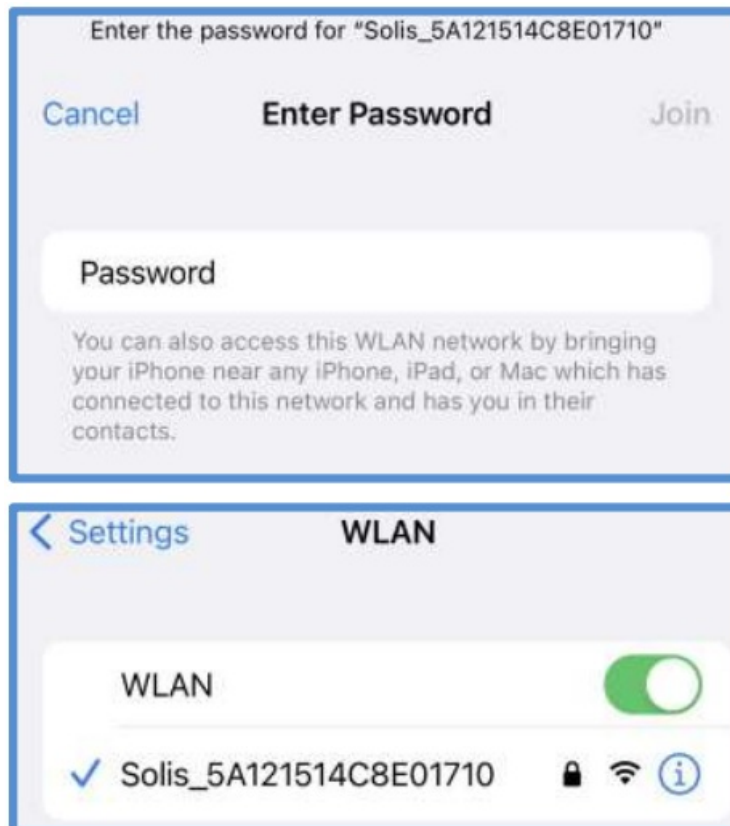


After that, return to APP.

Step 8 : Click “s”, make sure the phone is connected to router WiFi and switch back to the page to fill in the WiFi password, then move to next step.

< Connect to route [view the tutorial](#)

Connect to route


Click to connect router 

Input router's password

Next(2/3)

Step 9 : Configuration Complete.

Configuration Complete



Configuration Complete

OK(3/3)


The setting is succeeded, the logger will try to connect to the corresponding WIFI source.
Note:

1. It takes about 1 minute for the datalogger to connect to the Internet. If the green indicator light on the logger is always on, it means that the logger is rightly connected to the Internet.
2. If the green indicator light of the logger keeps flashing after 1 minute, please try reset it again.

For more help or other questions, please check the installation manual or contact the local distributor for help.


Create the Solis Cloud Account

Step 1: Click the "Register".

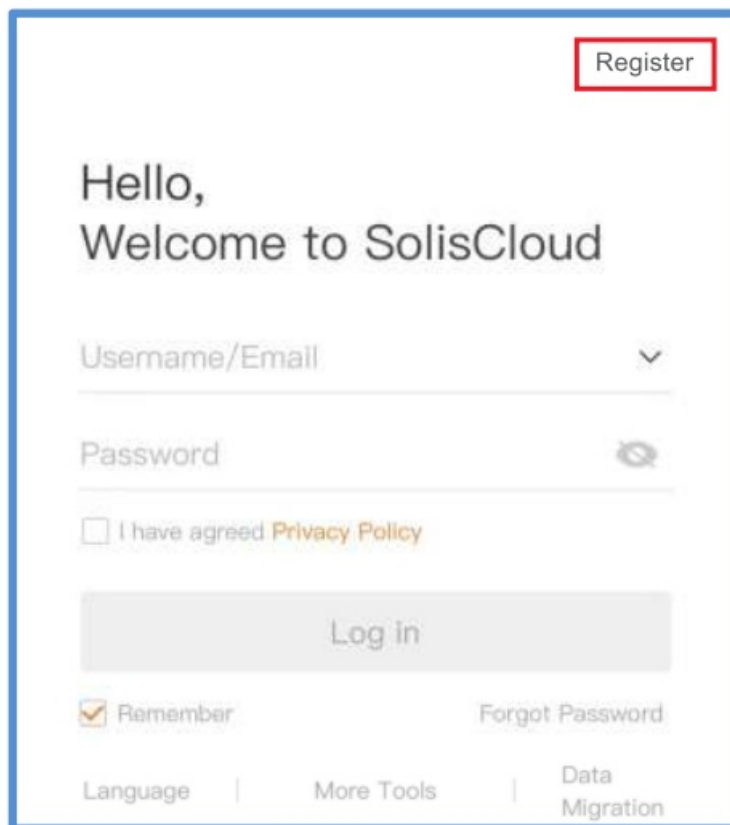

The image shows the SolisCloud login and registration interface. At the top right, there is a red-bordered button labeled "Register". Below it, the text "Hello, Welcome to SolisCloud" is displayed. The form includes two input fields: "Username/Email" with a dropdown arrow and "Password" with an eye icon for toggling visibility. Below these fields is a checkbox labeled "I have agreed Privacy Policy". A grey "Log in" button is positioned below the checkbox. At the bottom left, there is a checked checkbox labeled "Remember". At the bottom right, there is a link labeled "Forgot Password". The footer contains three links: "Language", "More Tools", and "Data Migration".

Step2: Select Owner or Organization for email address registration.

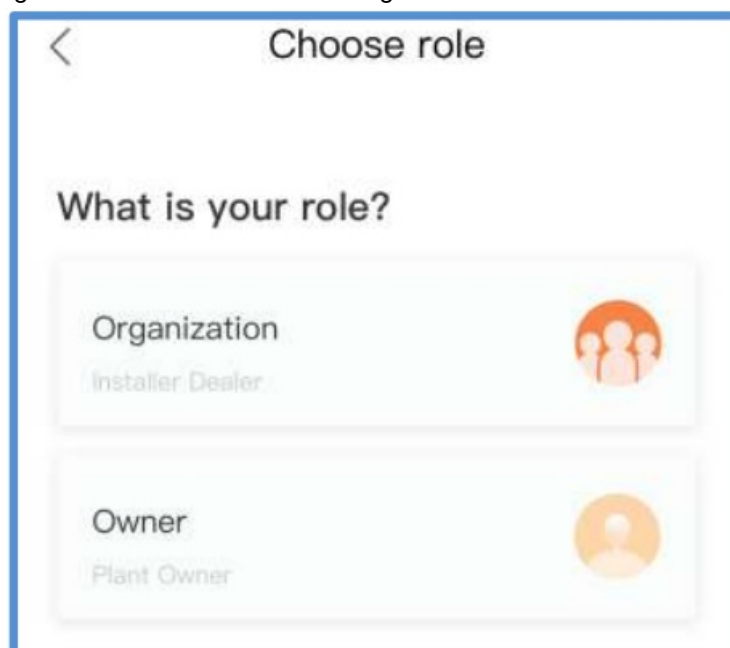

The image shows the "Choose role" screen. At the top, there is a back arrow and the title "Choose role". Below the title, the question "What is your role?" is displayed. There are two selectable options: "Organization" with the subtext "Installer Dealer" and an icon of three people, and "Owner" with the subtext "Plant Owner" and an icon of a single person. Both options are highlighted with a light blue background.

Step3: Enter the email to get the verification code, then enter your account and password, last click the "Register".

Owner

* Registration Method

input email

input verification code

Send

* User Name

input 2 to 60 English letters, not pure n...

* Password

input 6 to 32 letters, symbols and...

* Time Zone

(UTC+08:00) PRC

>

☐ * I have agreed [Privacy Policy](#)

Register

Owner Register

Organization

Note: If your organization has registered an account in SofisCloud, you do not need to register again. Please contact the administrator to add you as a sub-organization or member in organization management.

* Organization (Company) Name

Input 2 to 60 characters

* Registration Method

Input email

Input verification code

Send

* User Name

Input 2 to 60 English letters, not pure n...

* Password

Input 6 to 32 letters, symbols and...

* Organization Code

541248

* Time Zone

(UTC+08:00) PRC

>


☐ * I have agreed [Privacy Policy](#)

Register

Organization Register

Create Plant

Step1: Enter the main page of Solis Cloud APP, click "+" at the top right corner and select "Add plant".

* Currency	USD >
* Earning per kWh(USD/kWh)	Input Earning per kWh
Organization Code	EF1E1F >
Set Owner ? >	
Add Guest ? ⊕	
Installer Email	Input installer email
Installer Phone	Input installer Phone
Module	Input number of modules
Grid Connection Type ?	Entire Energy Exported >
Plant Contact Phone	Input phone
Plant Picture	
	
More Settings ?	
Azimuth	0°
Inclination	30°
Remark 1	Input remark
Remark 2	Input remark
Remark 3	Input remark

Step 3: Confirm the plant information.
Click "Create plant".

Create Plant

Done

Plant Name

text

Plant Type

Residential

Area

Location

Address

Ningbo Zhejiang

Time Zone

(UTC-05:00) US/
East-Indiana

Currency

USD

Earning per
kWh(USD/kWh)

0.390

Organization
Code

EF1E1F

Grid Connection
Type

Entire Energy Exported

Azimuth

0°


Inclination

30°

Cancel

Create Plant

Step 4: Click “View plant ” to enter the plant homepage , then add the datalogger.

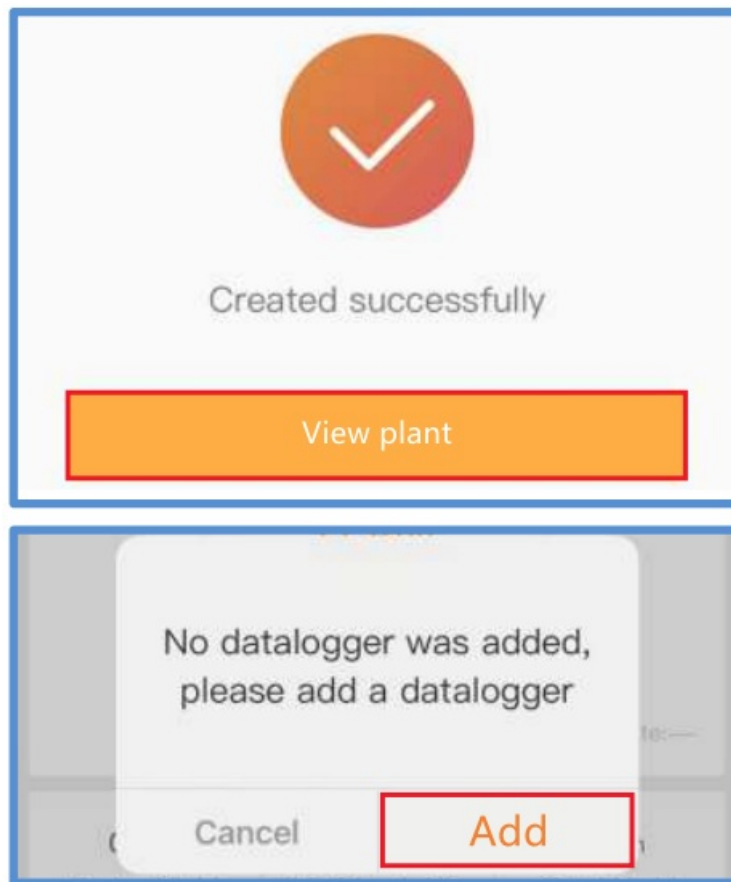


Step 5: Scan the datalogger SN QR code or manually input it.



Note: Scan the datalogger SN, NOT the inverter SN.



Step 6: Plant creation succeeds. Click “Continue to bind” to check the monitoring data. If the plant has multiple dataloggers, please click “View Plant”.

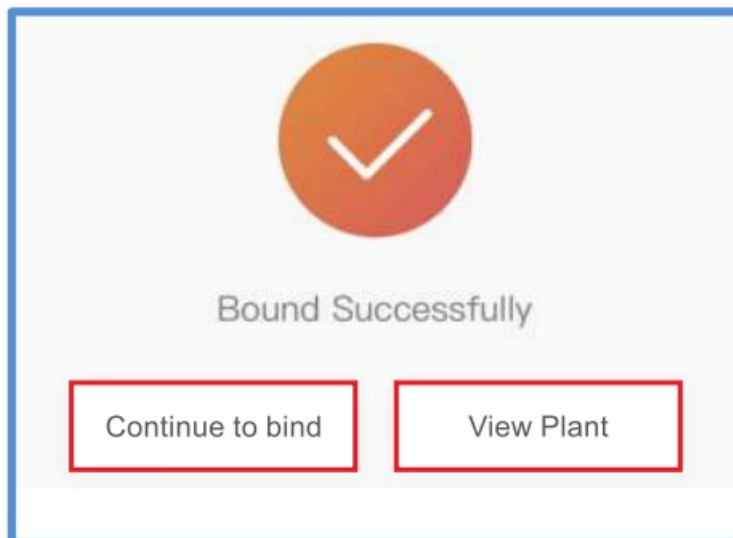

FCC Certification

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Contact

Please contact us if you have any technical problems in terms of the product. Please provide the following information as well:

Inverter SN

Datalogger SN

Problem Description

Ginlong Technologies Co., Ltd.
No. 57 Jintong Road, Binhai Industrial Park,
Xiangshan, Ningbo, Zhejiang, 315712, P.R.China.



Tel: +86 (0)574 6578 1806

Fax: +86 (0)574 6578 1606

Email : info@ginlong.com

Web : www.ginlong.com

Documents / Resources

	<p>solis WiFi Stick Datalogger [pdf] Installation Guide WiFi Stick Datalogger, WiFi Datalogger, Stick Datalogger, Datalogger, S3-WiFi-ST V3, S3-WiFi-ST V6, S3-WiFi-ST</p>
	<p>solis WiFi Stick Datalogger [pdf] Installation Guide WiFi Stick Datalogger, WiFi Stick, Stick Datalogger, Datalogger</p>

Manuals+.