



# SONBEST ST1200B 10-Channel Network Interface Temperature Acquisition Module User Manual

[Home](#) » [SONBEST](#) » SONBEST ST1200B 10-Channel Network Interface Temperature Acquisition Module User Manual 

## Contents

- 1 SON BEST ST1200B 10-Channel Network Interface Temperature Acquisition Module
- 2 Technical Parameters
- 3 Product Size
- 4 How to wiring?
- 5 Application solution
- 6 How to use?
- 7 Communication Protocol
- 8 Read Data (Function id 0x03)
- 9 Data Address Table
- 10 read and modify device address
- 11 Change device address
- 12 Read and Modify Baud Rate
- 13 Change the baud rate
- 14 Read Correction Value
- 15 Change correction value
- 16 Disclaimer
- 17 Contact Us
- 18 Documents / Resources
  - 18.1 References
- 19 Related Posts

SONBEST

## SON BEST ST1200B 10-Channel Network Interface Temperature Acquisition Module




ST1200B using the standard TCP/IP Network Interface,easy access to PLC DCS and other instruments or systems for monitoring temperaturex=100@10 state quantities.The internal use of high-precision sensing core and related devices to ensure high reliability and excellent long-term

stability,can be customized RS232,RS485,CAN,4-20mA,DC0~5V\10V,ZIGBEE,Lora,WIFI,GPRS and other output methods.

### Technical Parameters

Technical parameter	Parameter value
Brand	SONBEST
Temperature measuring range	-50°C~120°C
Temperature measuring accuracy	±0.5°C @25°C
Support sensors	1000
Channels	10
Max Sensors of channel	100
Support sensor	sensor of DS18B20
Communication Interface	TCP/IP
Power	DC9~24V 1A
Running temperature	-40~80°C
Working humidity	5%RH~90%RH

## Product Size

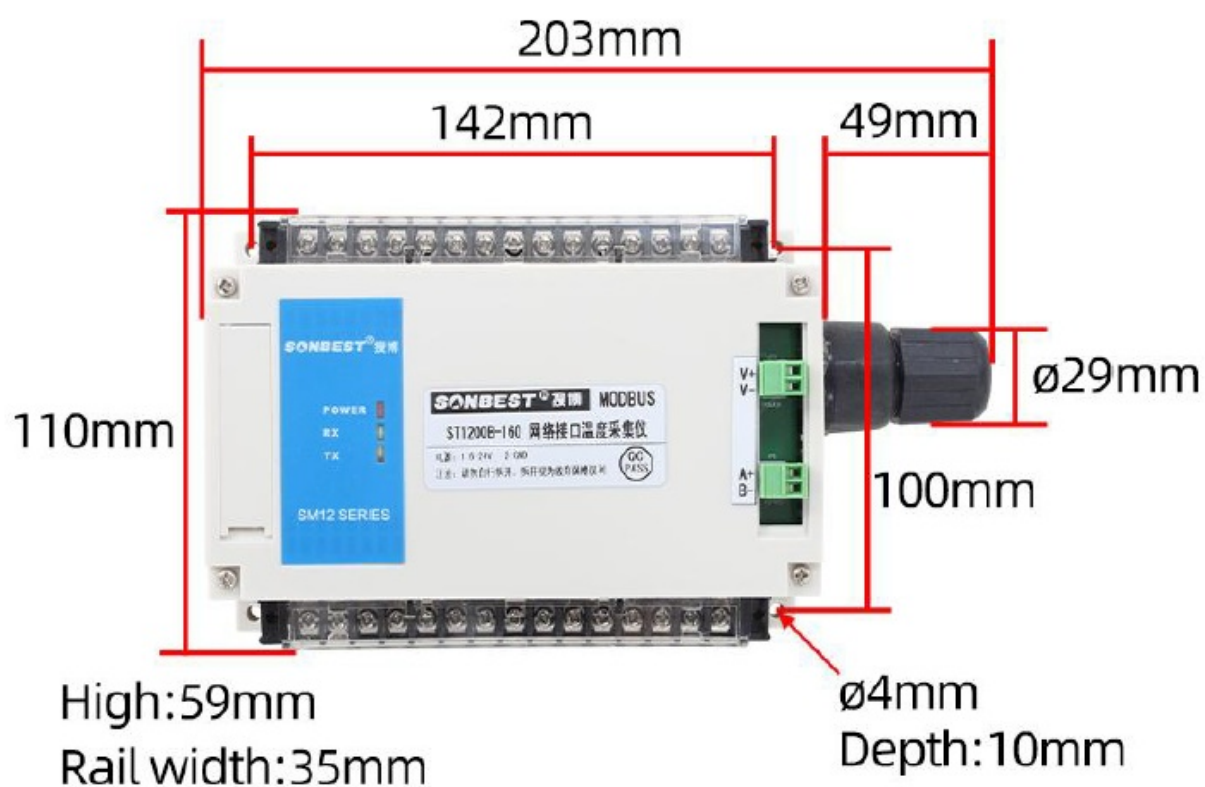

## How to wiring?

### WIRING

V+	PWR+	VCC	Sensor PWR+
V-	PWR-	DQ1	Channel 1 signal line
A+	RS485 A+	.....	
B-	RS485 B-	DQ10	Channel 10 signal line
		GND	Sensor PWR-

※Note: When wiring, connect the positive and negative poles of the power supply first, and then connect the signal wire

## Application solution

### Single module application scheme


Acquisition module

RS485 Converter

Can be equipped  
with up to 1000M line

Up to 10 channels can be connected,  
length up to 500M


Computer

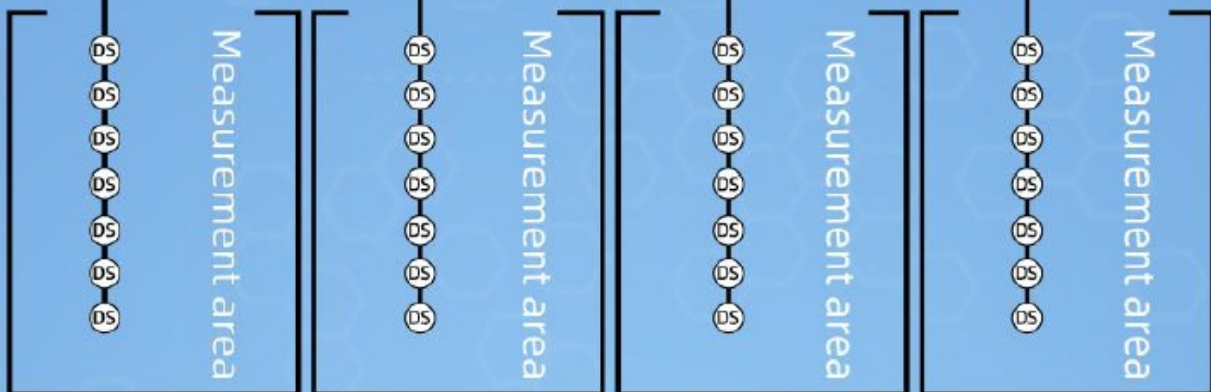

DS :Indicates that the DS18B20 probe can be connected to  
each channel ≤ 100 probes



## ■ Multi-module application scheme

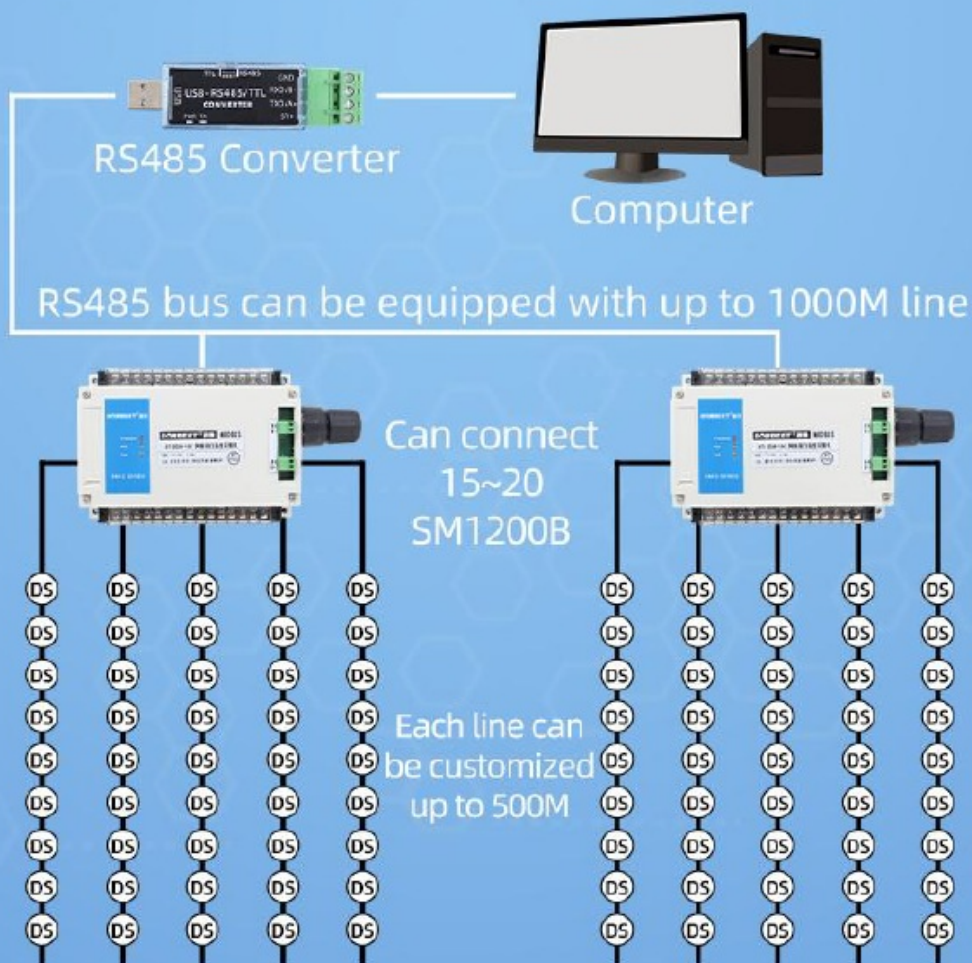

**DS** :Indicates that the DS18B20 probe can be connected to each channel  $\leq 100$  probes

## How to use?



## Communication Protocol

The product uses RS485 MODBUS-RTU standard protocol format, all operation or reply commands are hexadecimal data. The default device address is 1 when the device is shipped, the default baud rate is 9600, 8, n, 1

### Read Data (Function id 0x03)

Inquiry frame (hexadecimal), sending example: Query 1# device 1 data, the host computer sends the command: 01 03 00 00 03 E8 45 74

Device ID	Function id	Start Address	Data Length	CRC16
01	03	00 00	03 E8	45 74

For the correct query frame, the device will respond with data: 01 03 C8 00 79 00 7A 00 7B 00 7C 00 7D 00 7E 00 7F 00 80 00 81 00 82 00 83 00 84 00 85 00 86 00 87 00 88 00 89 00 8A 00 8B 00 8C 00 8D 00 8E 00 8F 00 90 00 91 00 92 00 93 00 94 00 95 00 96 00 97 00 98 00 99 00 9A 00 9B 00 9C 00 9D 00 9E 00 9F 00 A0 00 A1 00 A2 00 A3 00 A4 00 A5 00 A6 00 A7 00 A8 00 A9 00 AA 00 AB 00 AC 00 AD 00 AE 00 AF 00 B0 00 B1 00 B2 00 B3 00 B4 00 B5 00 B6 00 B7 00 B8 00 B9 00 BA 00 BB 00 BC 00 BD 00 BE 00 BF 00 C0 00 C1 00 C2 00 C3 00 C4 00 C5 00 C6 00 C7 00 C8 00 C9 00 CA 00 CB 00 CC 00 CD 00 CE 00 CF 00 D0 00 D1 00 D2 00 D3 00 D4 00 D5 00 D6 00 D7 00 D8 00 D9 00 DA 00 DB 00 DC 5E F6 , the response format is parsed as follows:

[illegible]

Data Description: The data in the command is hexadecimal. Take data 1 as an example. 00 79 is converted to a decimal value of 121. If the data magnification is 100, the actual value is  $121/100=1.21$ . Others and so on.

### Data Address Table

Address	Start Address	Description	Data type	Value range
40258	01 01	1CH1# Temperature deposit	Read only	0~65535
40259	01 02	1CH2# Temperature deposit	Read only	0~65535
.....	.....	1Omit)	...	...
40358	01 64	1CH100# Temperature deposit	Read only	0~65535
40514	02 01	2CH1# Temperature deposit	Read only	0~65535
40515	02 02	2CH2# Temperature deposit	Read only	0~65535
.....	.....	2Omit)	...	...

40614	02 64	2CH100 Temperature deposit	Read only	0~65535
---	---	Omit)	---	---
42562	03 01	10CH1# Temperature deposit	Read only	0~65535
42563	03 02	10CH2# Temperature deposit	Read only	0~65535
.....	.....	10Omit)	...	...
42662	03 64	10CH100# Temperature deposit	Read only	0~65535

40101	00 64	model code	read/write	0~65535
40102	00 65	total points	read/write	1~20
40103	00 66	Device ID	read/write	1~249
40104	00 67	baud rate	read/write	0~6
40105	00 68	mode	read/write	1~4
40106	00 69	protocol	read/write	1~10

## read and modify device address

### 1. Read or query device address

If you don't know the current device address and there is only one device on the bus, you can use the command FA 03 00 64 00 02 90 5F Query device address.

Device ID	Function id	Start Address	Data Length	CRC16
FA	03	00 64	00 02	90 5F

FA is 250 for the general address. When you don't know the address, you can use 250 to get the real device address, 00 64 is the device model register.

For the correct query command, the device will respond, for example the response data is: 01 03 02 07 12 3A 79, the format of which is as shown in the following table:



Device ID	Function id	Start Address	Model Code	CRC16
01	03	02	55 3C 00 01	3A 79

Response should be in the data, the first byte 01 indicates that the real address of the current device is, 55 3C converted to decimal 20182 indicates that the current device main model is 21820, the last two bytes 00 01 Indicates that the device has a status quantity.

## Change device address

For example, if the current device address is 1, we want to change to 02, the command is:01 06 00 66 00 02 E8 14

Device ID	Function id	Start Address	Destination	CRC16
01	06	00 66	00 02	E8 14

After the change is successful, the device will return information: 02 06 00 66 00 02 E8 27 , its format is parsed as shown in the following table:

Device ID	Function id	Start Address	Destination	CRC16
01	06	00 66	00 02	E8 27

Response should be in the data, after the modification is successful, the first byte is the new device address. After the general device address is changed, it will take effect immediately. At this time, the user needs to change the query command of the software at the same time.

## Read and Modify Baud Rate

### 1. Read baud rate

The device default factory baud rate is 9600. If you need to change it, you can change it according to the following table and the corresponding communication protocol. For example, read the current device's baud rate ID, the command is:01 03 00 67 00 01 35 D5 , its format is parsed as follows.

Device ID	Function id	Start Address	Data Length	CRC16
01	03	00 67	00 01	35 D5

Read the baud rate encoding of the current device. Baud rate encoding: 1 is 2400; 2 is 4800; 3 is 9600; 4 is 19200; 5 is 38400; 6 is 115200.

For the correct query command, the device will respond, for example the response data is: 01 03 02 00 03 F8 45, the format of which is as shown in the following table:

Device ID	Function id	Data Length	Rate ID	CRC16
01	03	02	00 03	F8 45

coded according to baud rate, 03 is 9600, ie the current device has a baud rate of 9600.

## Change the baud rate

For example, changing the baud rate from 9600 to 38400, ie changing the code from 3 to 5, the command is: 01 06 00 67 00 05 F8 1601 03 00 66 00 01 64 15 .

Device ID	Function id	Start Address	Target Baud Rate	CRC16
01	03	00 66	00 01	64 15

Change the baud rate from 9600 to 38400, changing the code from 3 to 5. The new baud rate will take effect immediately, at which point the device will lose its response and the baud rate of the device should be queried accordingly. Modified.

## Read Correction Value

### 1. Read Correction Value

When there is an error between the data and the reference standard, we can reduce the display error by adjusting the correction value. The correction difference can be modified to be plus or minus 1000, that is, the value range is 0-1000 or 64535 -65535. For example, when the display value is too small, we can correct it by adding 100. The command is: 01 03 00 6B 00 01 F5 D6 . In the command 100 is hex 0x64 If you need to reduce, you can set a negative value, such as -100, corresponding to the hexadecimal value of FF 9C, which is calculated as 100-65535=65435, and then converted to hexadecimal to 0x FF 9C. The correction value starts from 00 6B. We take the first parameter as an example. The correction value is read and modified in the same way for multiple parameters.

Device ID	Function id	Start Address	Data Length	CRC16
01	03	00 6B	00 01	F5 D6

For the correct query command, the device will respond, for example the response data is: 01 03 02 00 64 B9 AF, the format of which is as shown in the following table:

Device ID	Function id	Data Length	Data value	CRC16
01	03	02	00 64	B9 AF

In the response data, the first byte 01 indicates the real address of the current device, and 00 6B is the first state quantity correction value register. If the device has multiple parameters, other parameters operate in this way. The same, the general temperature, humidity have this parameter, the light generally does not have this item.

## Change correction value

For example, the current state quantity is too small, we want to add 1 to its true value, and the current value plus 100 correction operation command is:01 06 00 6B 00 64 F9 FD

Device ID	Function id	Start Address	Destination	CRC16
01	06	00 6B	00 64	F9 F

After the operation is successful, the device will return information: 01 06 00 6B 00 64 F9 FD, the parameters take effect immediately after successful change.


## Disclaimer

This document provides all information about the product, does not grant any license to intellectual property, does not express or imply, and prohibits any other means of granting any intellectual property rights, such as the statement of sales terms and conditions of this product, other issues. No liability is assumed. Furthermore, our company makes no warranties, express or implied, regarding the sale and use of this product, including the suitability for the specific use of the product, the marketability or the infringement liability for any patent, copyright or other intellectual property rights, etc. Product specifications and product descriptions may be modified at any time without notice.

## Contact Us

- **Company:** Shanghai Sonbest Industrial Co., Ltd
- **Address:** Building 8, No. 215 North east road, Baoshan District, Shanghai, China **Web:**  
<http://www.sonbest.com>
- **Web:** <http://www.sonbus.com>
- **SKYPE:** soobuu
- **Email:** [sale@sonbest.com](mailto:sale@sonbest.com)
- **Tel:** 86-021-51083595 / 66862055 / 66862075 / 66861077

## Documents / Resources

	<p><a href="#">SONBEST ST1200B 10-Channel Network Interface Temperature Acquisition Module</a> [pdf] User Manual ST1200B, 10-Channel Network Interface Temperature Acquisition Module</p>
---	---

## References

- [Home-ä Šæµ.æœášá@žă šæœ%œé™ă...-ă](#)
- [Home-SONBEST -SONBUS.COM| THE SENSOR COMPANY](#)
- [Home-SONBEST -SONBUS.COM| THE SENSOR COMPANY](#)