


SpeedyBee
F405 V3 Flight
Controller Stack



SpeedyBee F405 V3 Flight Controller Stack User Manual

[Home](#) » [SpeedyBee](#) » SpeedyBee F405 V3 Flight Controller Stack User Manual 

Contents

- [1 SpeedyBee F405 V3 Flight Controller Stack](#)
- [2 Dimensions](#)
- [3 Specifications](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

SpeedyBee


SpeedyBee F405 V3 Flight Controller Stack



Specs Overview


Product Name	SpeedyBee F405 V4 BLS 55A 30x30 Stack
Flight Controller	SpeedyBee F405 V4 Flight Controller
ESC	SpeedyBee BLS 55A 4-in-1 ESC
Bluetooth	Supported. For FC & ESC parameter settings
Wireless FC Firmware Flashing	NOT Supported
Wireless Blackbox Dwonload & Analysis	NOT Supported
Power Input	3-6S LiPo
Mounting	30.5 x 30.5mm (4mm hole size)
Dimension	45.6mm(L) x 44mm(W) x 18.3mm(H)
Weight	34g

Dimensions

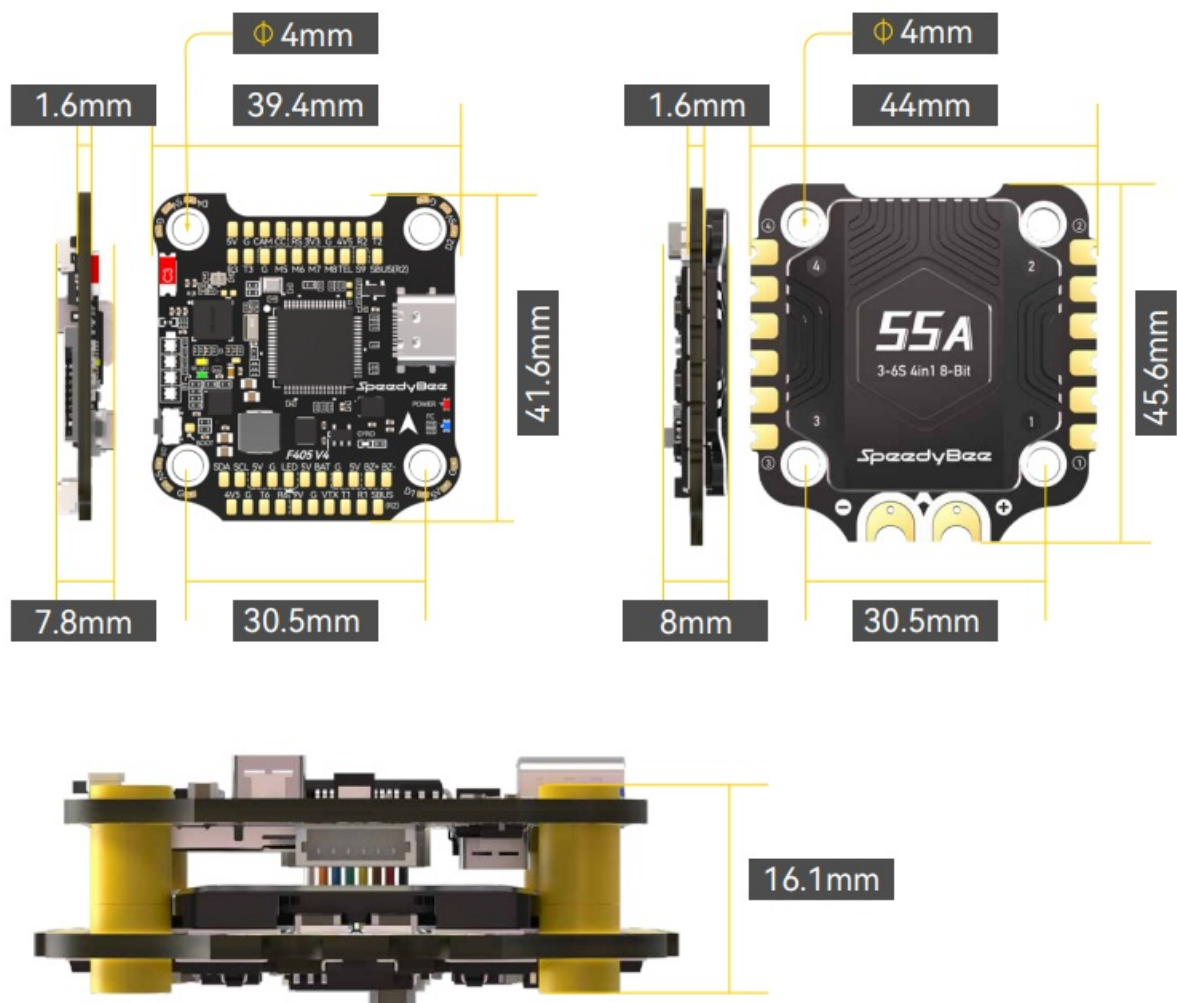

Important Tips for Installing the Flight Stack

Please ensure that the flight stack is installed in the standard manner, with the flight controller (FC) on top and the electronic speed controller (ESC) on the bottom. To change the gyroscope direction and motor sequence, use the "Settings." Any damage resulting from improper installation is not covered under our warranty.

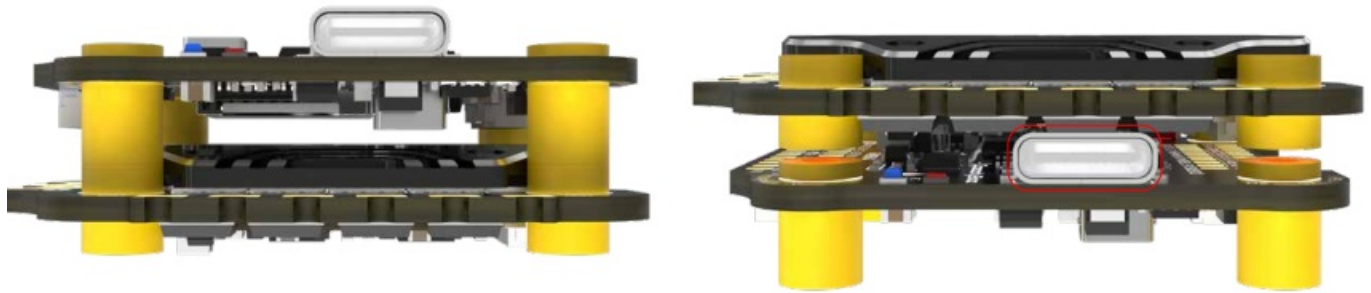

- Standard Installation Manner
- The installation method shown is ncorrect and may cause direct contact between FC and ESC.

Package

Option 1 – SpeedyBee F405 V4 55A 30×30 Stack




1. SpeedyBee F405 V4 Flight Controller x 1
2. SpeedyBee BLS 55A 4-in-1 ESC x 1
- 3.
4. 35V 1000uF Low ESR Capacitor x 1
5. M3 Nylon Nut x 5
6. M3 silicone O Ring x 5
7. M3*8mm Silicone Grommets(for FC) x 1
8. M3*8.1mm Silicone Grommets(for ESC) x 1
9. SH 1.0mm 25mm-length 8pin Cable(for FC-ESC connection) x 1 SH 1.0mm 75mm-length 8pin Cable* x 1

10. M3*30mm Inner-hexagon Screws x 5
11. DJI 6pin Cable(80mm) x 1
12. XT60 Power Cable(70mm) x 1


When the ESC tail faces the drone's front, use this cable for the flight controller and ESC; both ends plug interchangeably.

Option 2 – SpeedyBee F405 V4 Flight Controller

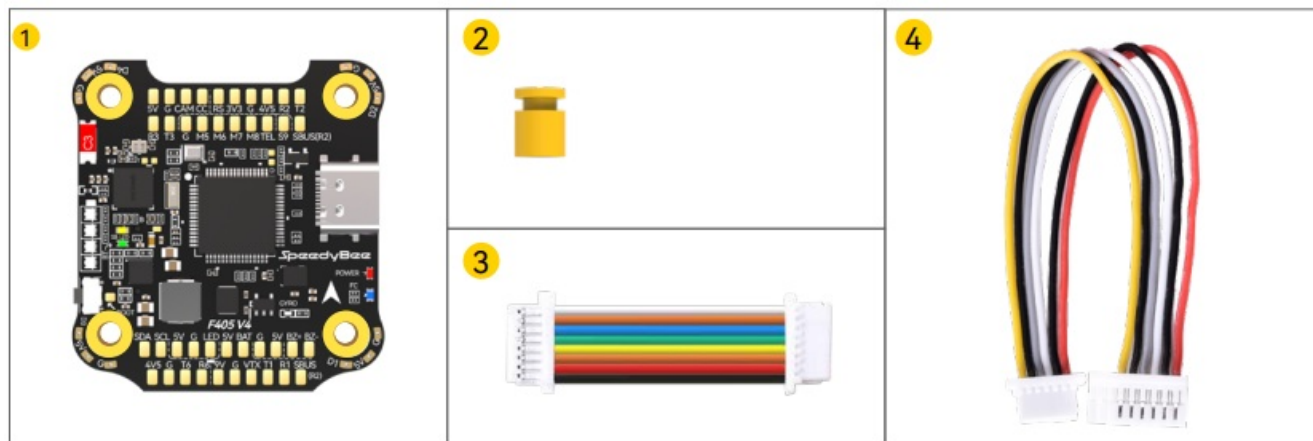

1. SpeedyBee F405 V4 Flight Controller x 1
2. M3*8mm Silicone Grommets(for FC) x 1
3. SH 1.0mm 25mm-length 8pin Cable(for FC-ESC connection) x 1
4. DJI 6pin Cable(80mm) x 1

Option 3 – SpeedyBee BLS 55A 4-in-1 ESC

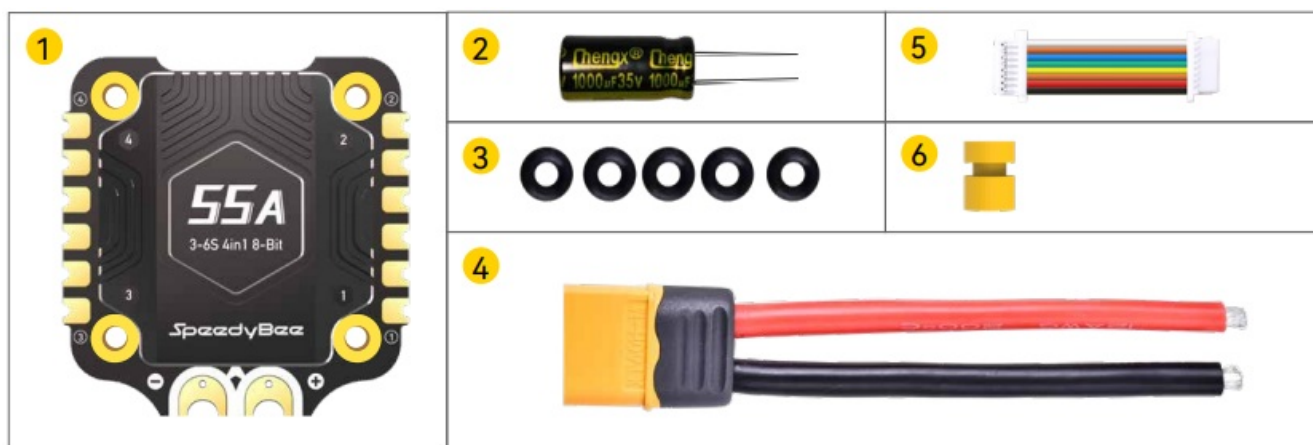


1. SpeedyBee BLS 55A 4-in-1 ESC x 1
2. 35V 1000uF Low ESR Capacitor x 1
3. M3 silicone O Ring x 5
4. XT60 Power Cable(70mm) x 1
5. SH 1.0mm 25mm-length 8pin Cable(for FC-ESC connection) x 1
6. M3*8.1mm Silicone Grommets(for ESC) x 1

FC & ESC Connection

Use the 8-pin cable in the package to connect the FC and the ESC. Or solder 8 wires directly to the 8 pads on each end.

Method 1 – Using 8-pin cable

Use any end of the 8-pin JST cable to connect the FC to the ESC.

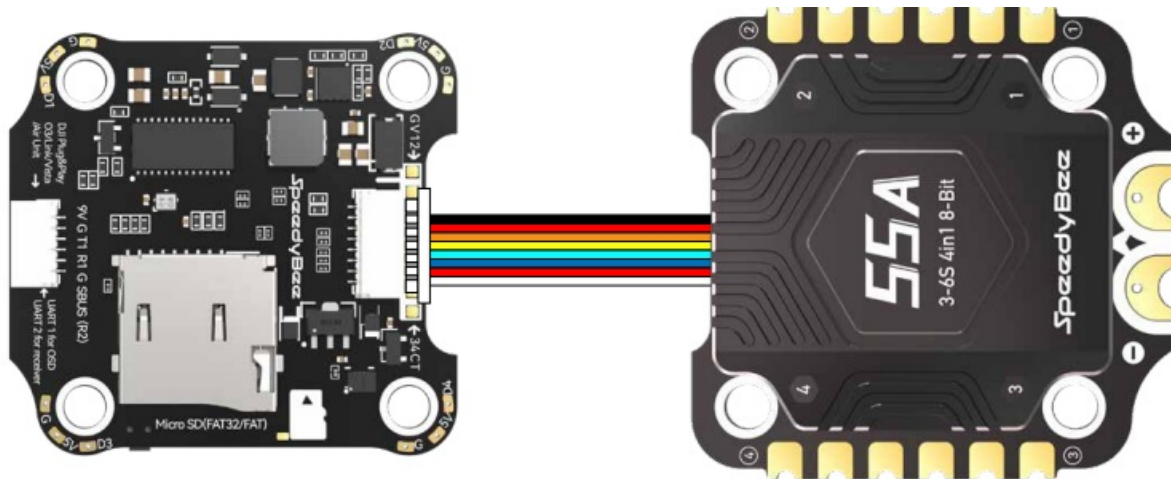


F405 V4 Flight Controller

BLS 55A 4-in-1 ESC

Method 2 – Direct soldering

Solder 8 wires to the 8 pads on each end referring to the pad definition below.


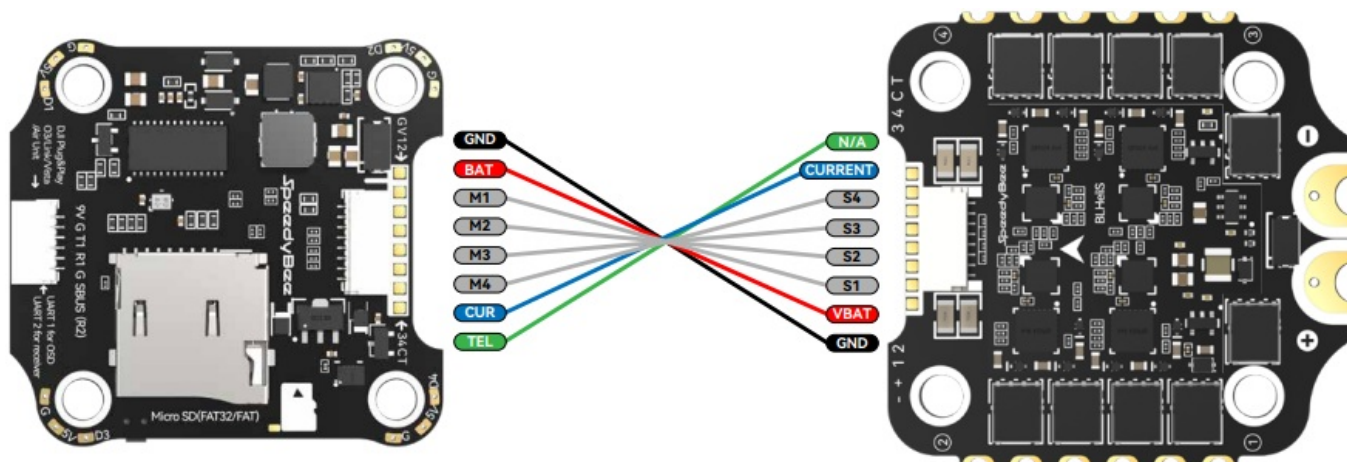


F405 V4 Flight Controller


BLS 55A 4-in-1 ESC

Part 2 – F405 V4 Flight Controller

Layout

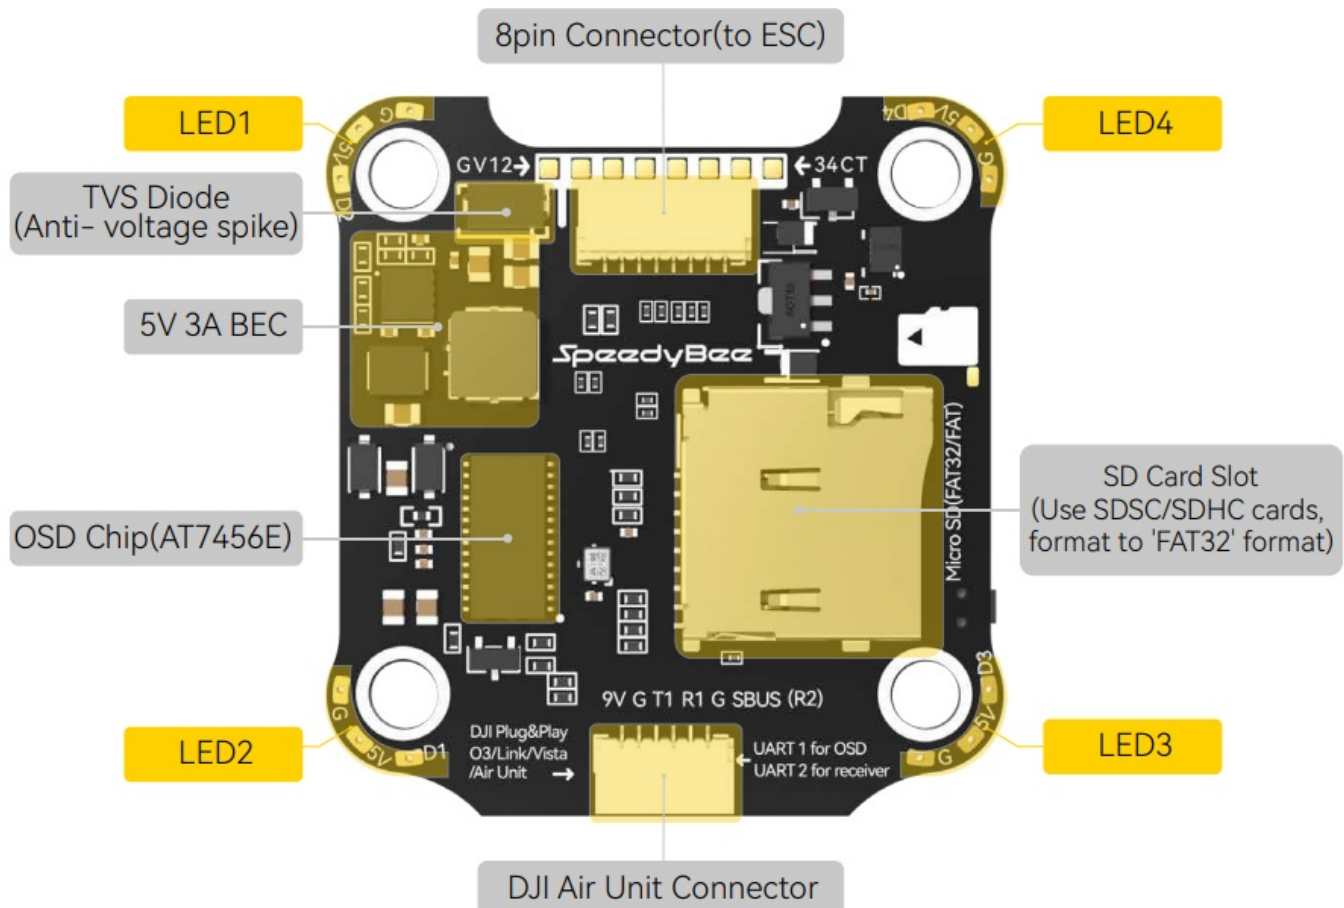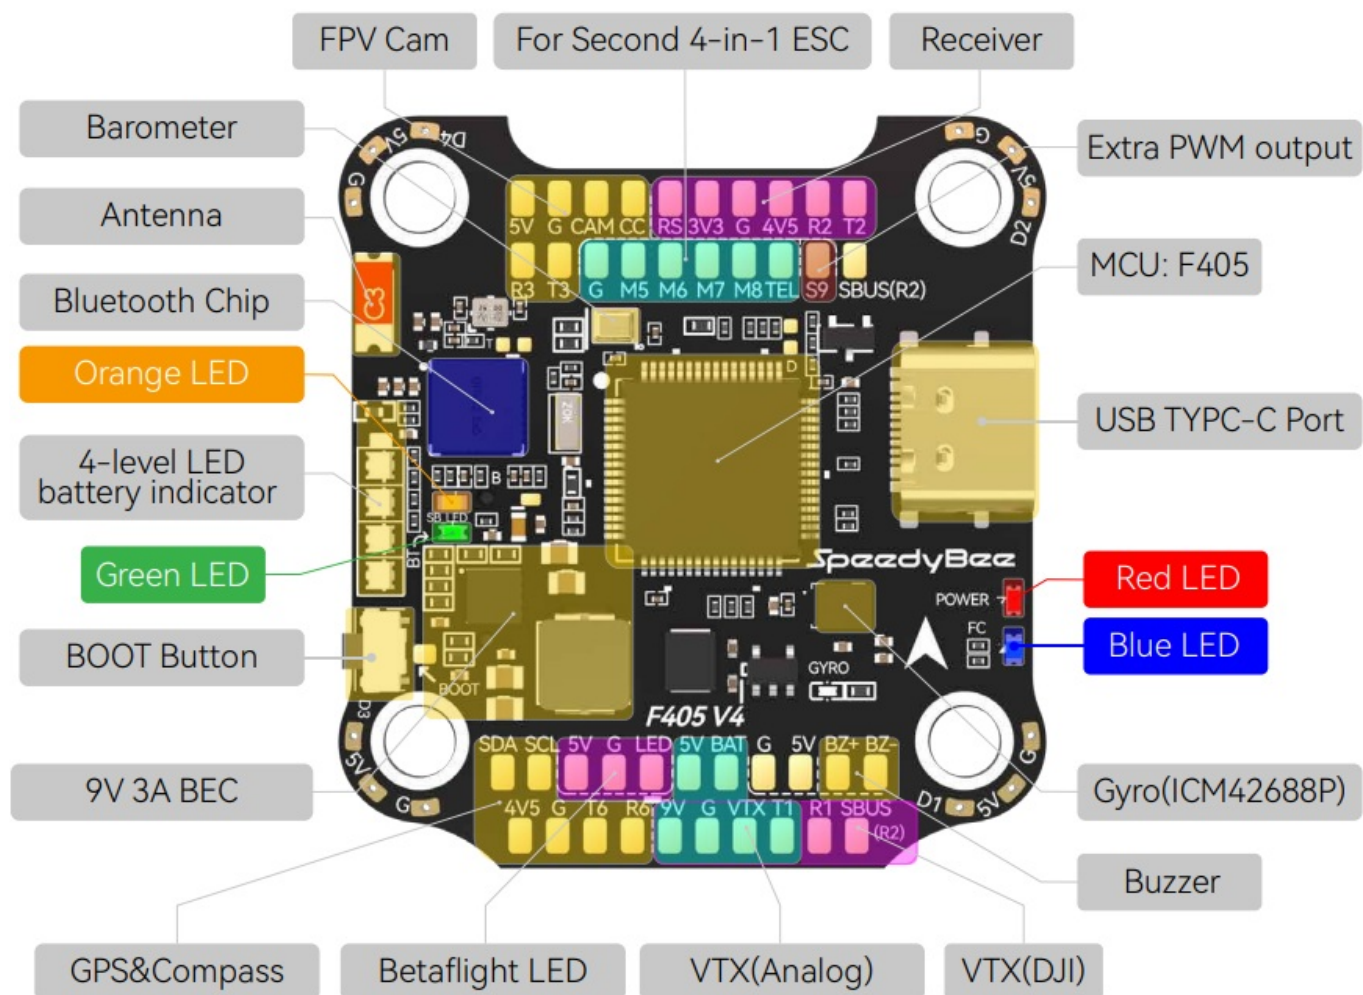

LED Indicator Definition

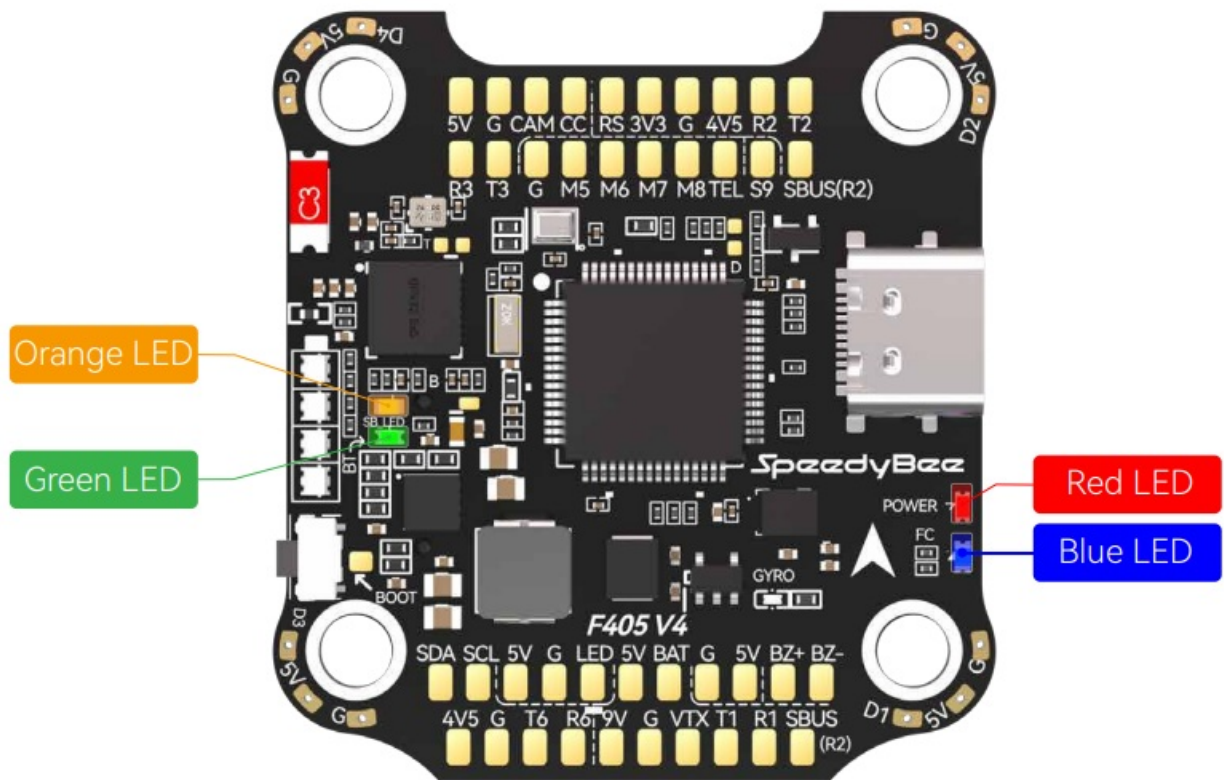



- RED LED – Power Indicator. Solid Red after powering up.
- GREEN LED – Bluetooth status light. Solid Green indicates Bluetooth is connected.
- BLUE LED – Flight controller status light which is controlled by the flight controller firmware.
- Orange LED – LED Control Mode Indicator. It indicates the 4 sets of LED strips connected to LED1-LED4 pads on the corners of the flight controller are controlled by Betaflight firmware(BF_LED mode) or the Bluetooth chip(SB_LED mode).
- Solid Orange indicates the 4 x LEDs are in SB_LED mode. In this mode, when the FC is powered on and in standby mode, press the BOOT button to cycle the display modes of the LEDs.
- OFF: indicates the 4 x LEDs are controlled by Betaflight firmware. Long press the button for 3 seconds to switch the control modes between BF_LED mode and SB_LED mode.
- **BOOT Button**
 - [A] Only if the flight controller gets bricked and can't power up, please follow these steps to re-flash firmware for it:

1. Insert a USB A to TYPE-C cable to your PC.
2. Press and hold the BOOT button, insert the USB cable into the flight controller, then release the BOOT button.
3. Open Betaflight/INAV configurator on the PC, go to the 'Firmware Flashing' page, choose the target 'SPEEDYBEEF405V4' and flash.


[B]. When the FC is powered on and in standby mode, the BOOT button can be used to control the LED strips connected to LED1-LED4 pads on the corners. Short-press the BOOT button to cycle the LED displaying mode. Long-press the BOOT button to switch between SpeedyBee-LED mode and BF-LED mode. Under BF-LED mode, all the LED1-LED4 strips will be controlled by the Betaflight firmware. The default mode is BF-LED mode.

FC's Peripheral Connection

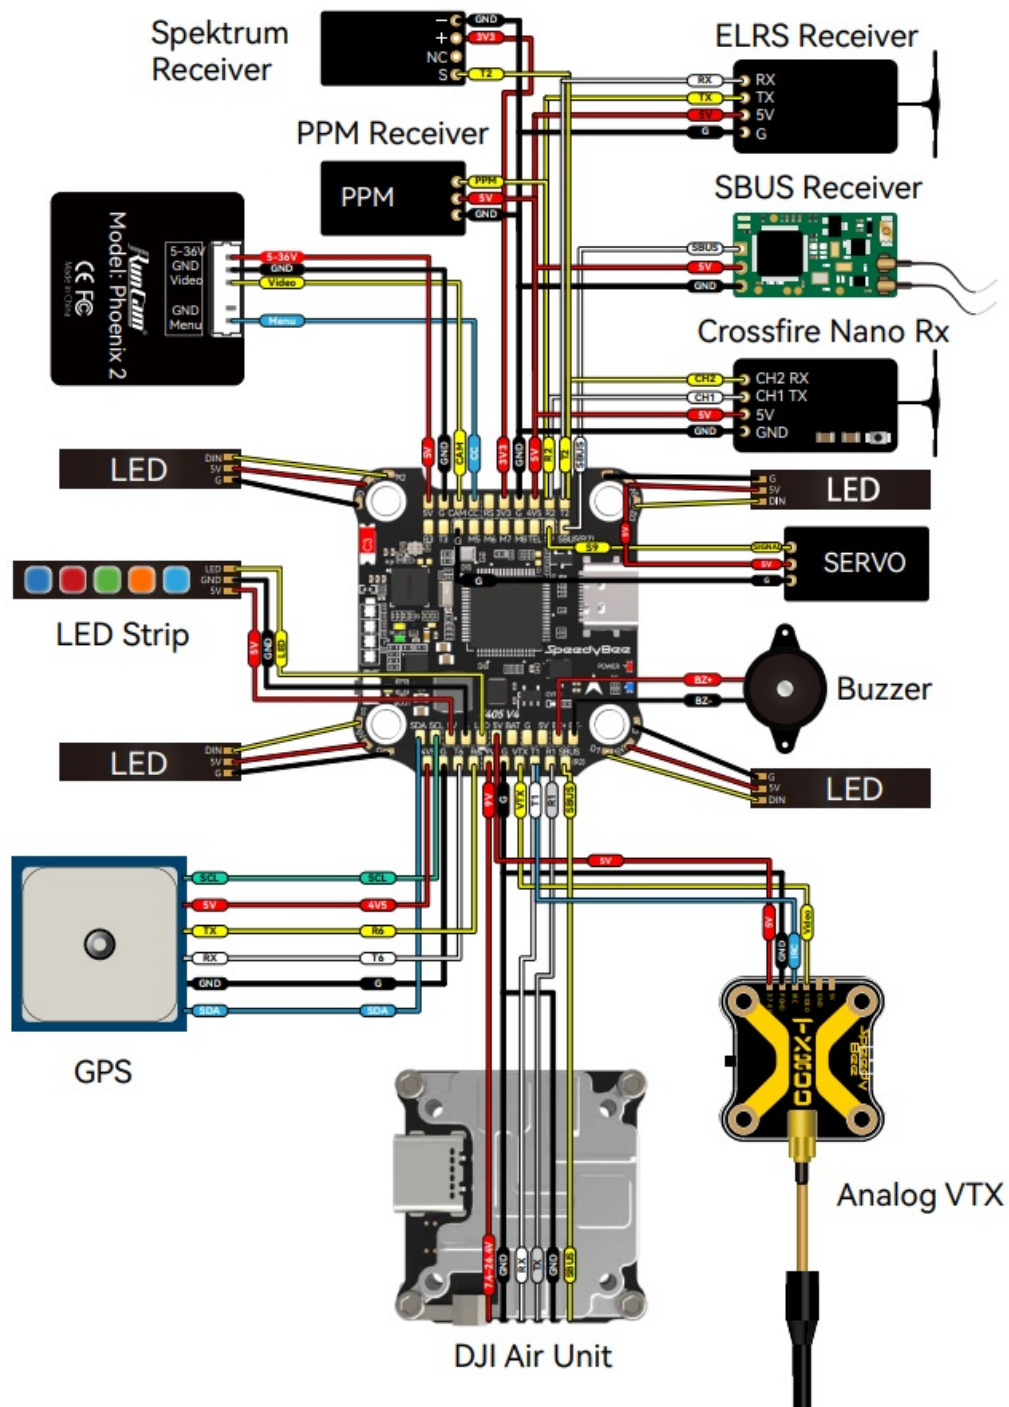

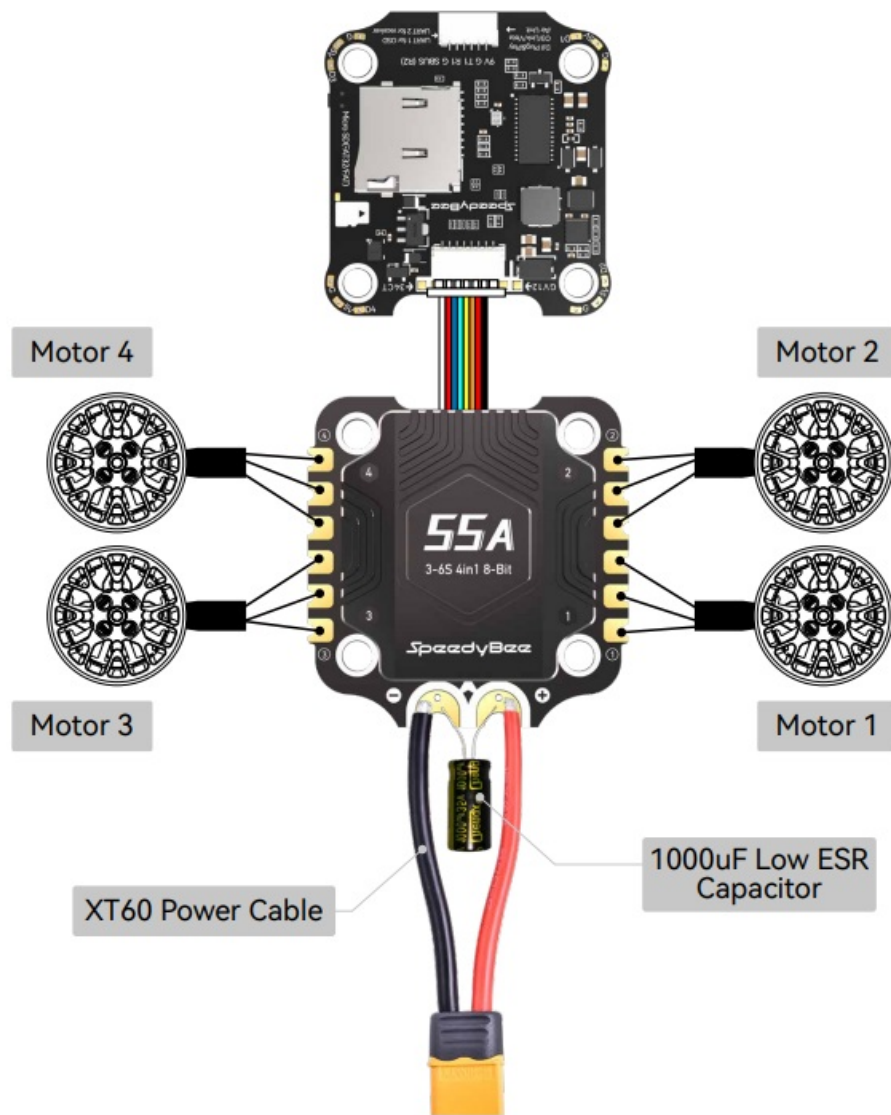

- Note1: In order to prevent the stack from being burnt out by voltage spikes on powering up, it is strongly recommended to use the Low ESR capacitor in the package.
- Note2: The FC and ESC can also connected via direct soldering. Soldering pads definition is as follows.

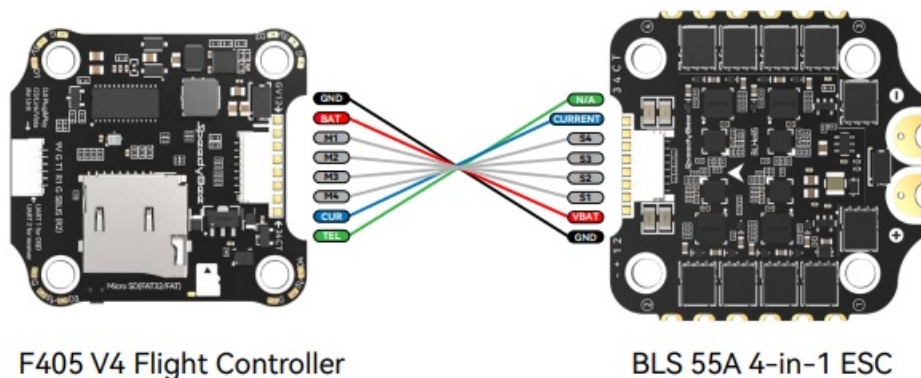


Cable Connection vs DJI O3 Air Unit

Use 6-pin cable comes with the O3 Air Unit




Cable Connection vs RunCam Link/Caddx Vista Air Unit

- Use 6-pin cable comes with the F405 V4 stack
- (See the accessory No.11 in the package section)

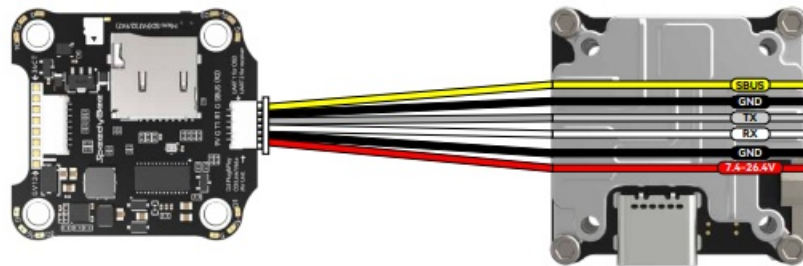

Cable Connection vs DJI Air Unit V1

- Use 6-pin cable comes with the F405 V4 stack
- (See the accessory No.11 in the package section)

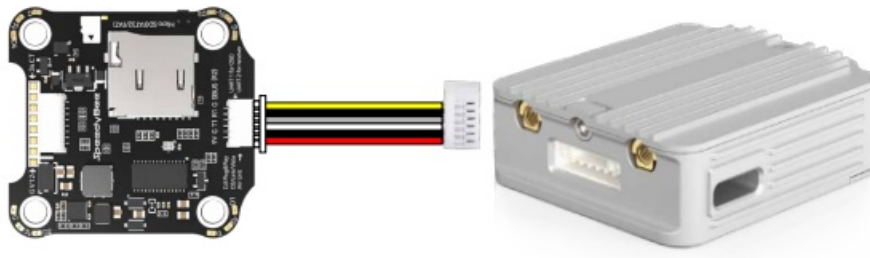


Importance notice for SBUS receiver

When using an SBUS receiver, the SBUS signal wire of the receiver must be connected to the SBUS pad on the front side of the flight controller (this pad internally uses UART2).


If you are also using the DJI Air Unit(O3/Link/Vista/Air Unit V1), you will need to disconnect the SBUS signal wire from the

Air Unit harness. Failure to do so will prevent the SBUS receiver from being properly recognized by the flight controller. You can use tweezers to pick out the SBUS wire from the 6-pin harness connector (or directly cut this wire) and insulate the exposed part of the wire carefully.

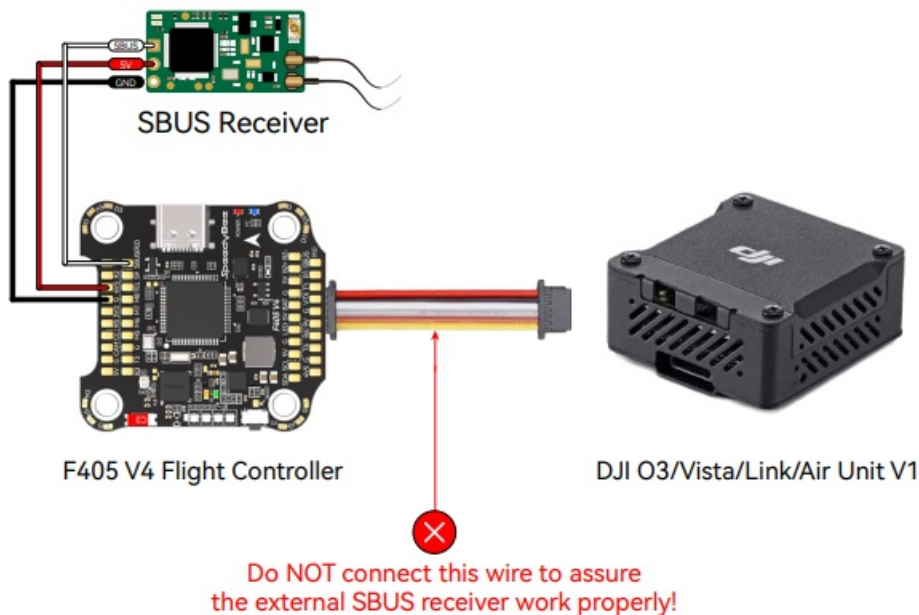

Importance notice for ELRS receiver

We recommend connecting the ELRS receiver's TX and RX to the T2 and R2 pads on the flight controller. However, when using the DJI Air Unit simultaneously, some ELRS receivers may not be recognized properly by the flight controller. If you encounter this issue, you need to disconnect the SBUS signal wire from the Air Unit harness. You can use tweezers to pick out the SBUS wire from the 6-pin harness connector (or directly cut this wire) and insulate the exposed part of the wire carefully.

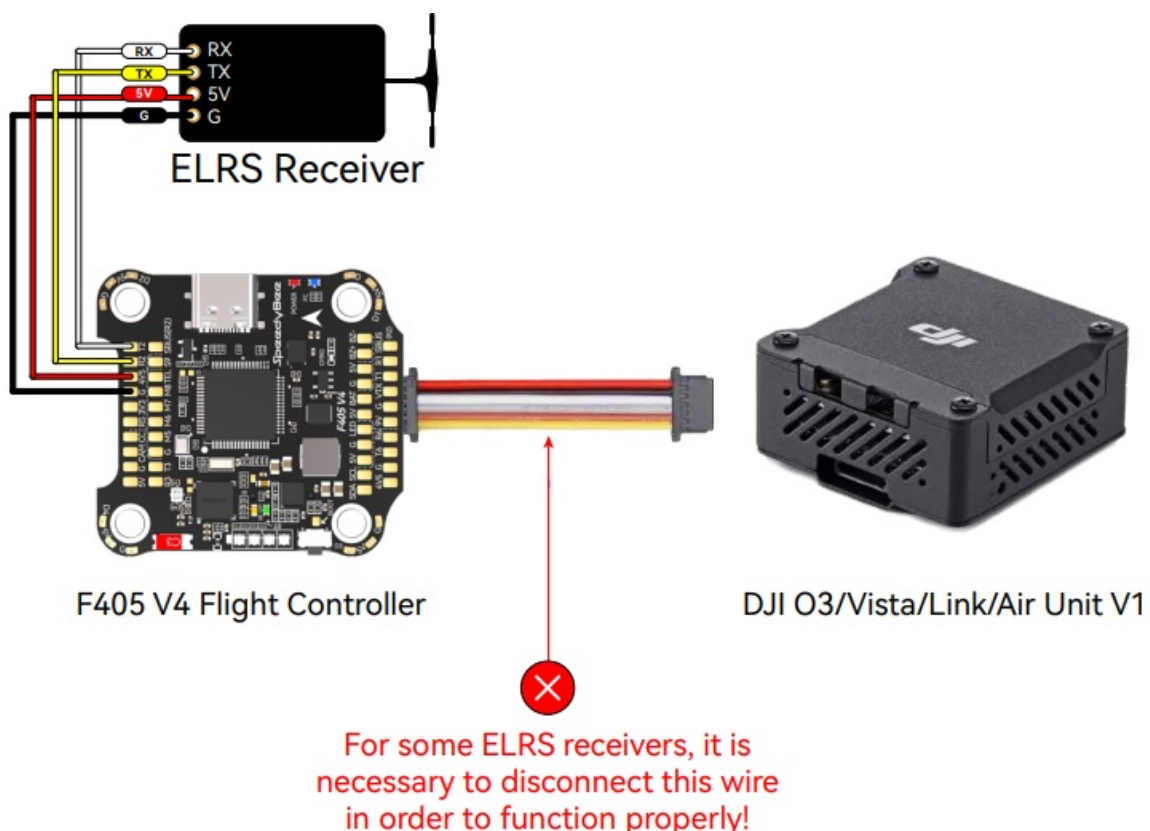


App & FC Configuration

Get the SpeedyBee App

Search 'SpeedyBee' on Google Play or App Store. Or download the Android .apk file on our website:
<https://www.speedybee.com/download>.


FC Configuration

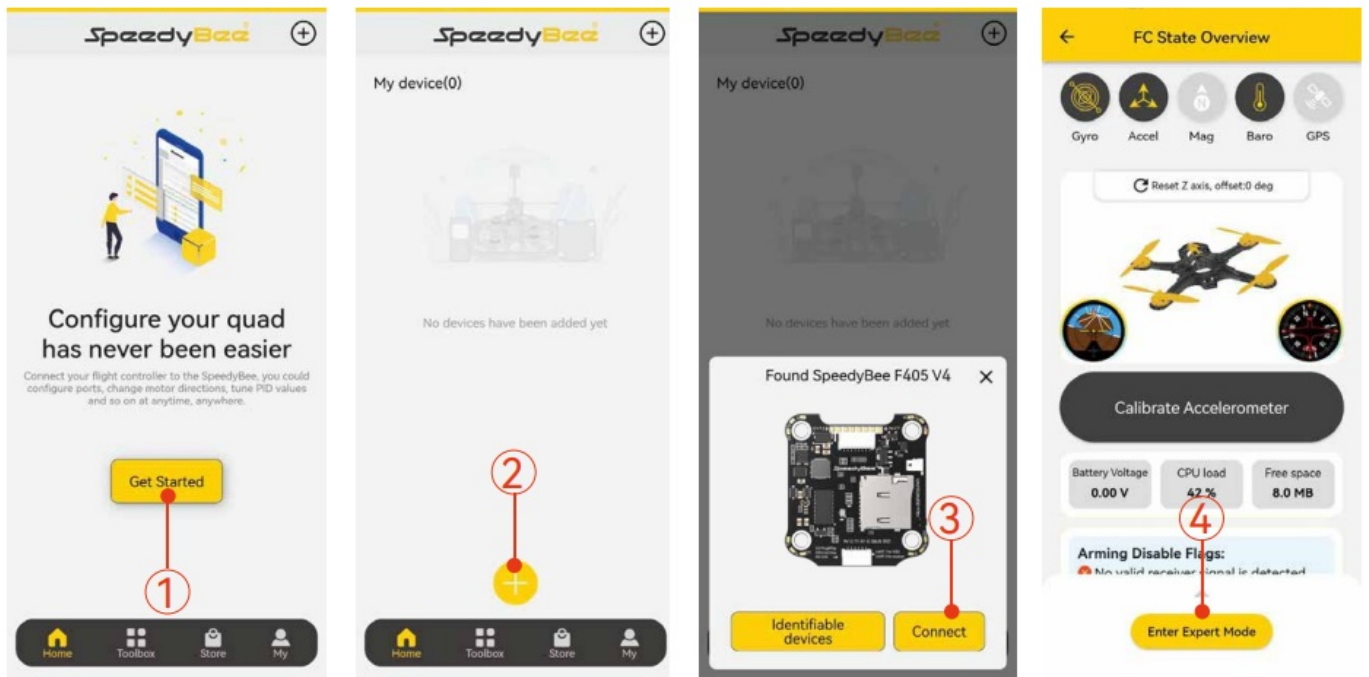

FC Firmware Update

SpeedyBee F405 V4 flight controller does not support wireless firmware flashing, so please flash firmware for it on your PC following the steps below:

1. Connect the flight controller to the PC with a USB cable
2. Open Betaflight/ INAV configurator on your PC. Take Betaflight configurator as an example, go to the 'Firmware Flashing' page, choose the target 'SPEEDYBEEF405V4' and flash.

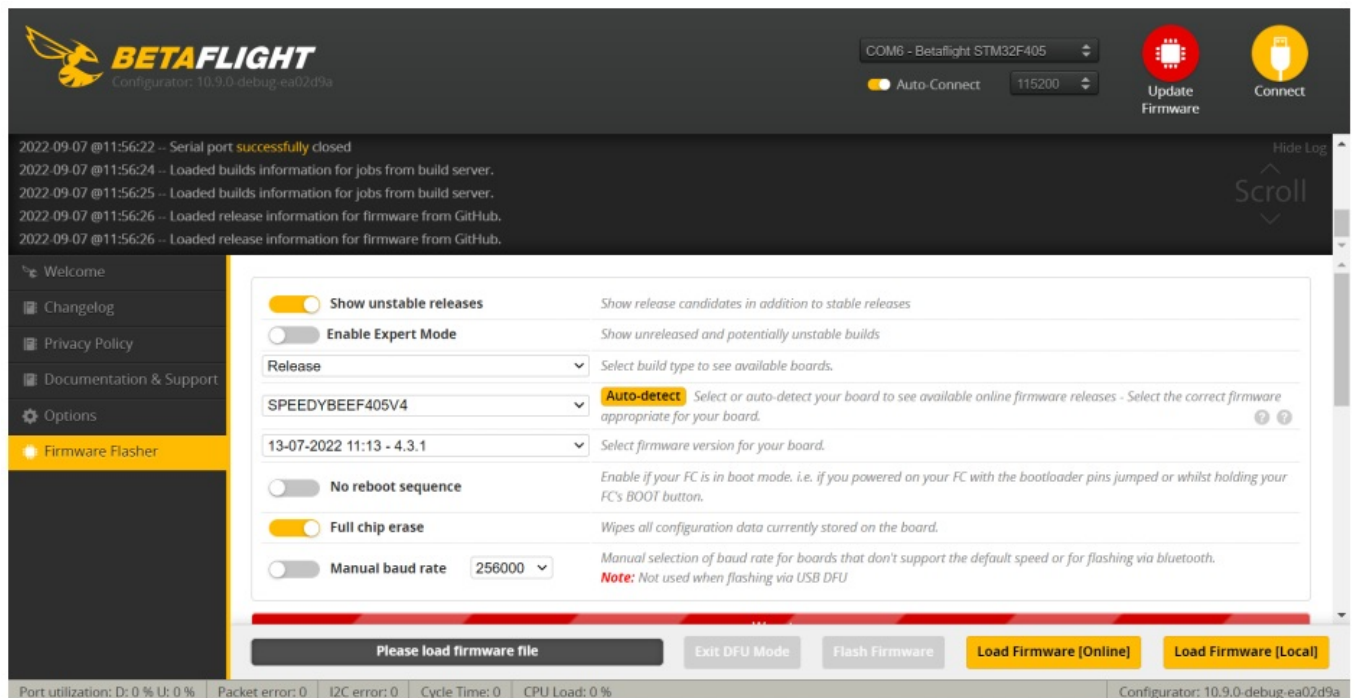


Specifications

Product Name	SpeedyBee F405 V4 30×30 Flight Controller
--------------	---


MCU	STM32F405
IMU(Gyro)	ICM42688P
USB Port Type	Type-C
Barometer	Built-in
OSD Chip	AT7456E chip
BLE Bluetooth	Supported. Used for Flight Controller configuration (MSP should be enabled with Baud rate 115200 on UART4)
WIFI	Not supported
DJI Air Unit Connection Way	Two ways supported: 6-pin connector or direct soldering.
6-pin DJI Air Unit Plug	Supported. Completely compatible with DJI O3/RunCam Link/Caddx Vista/DJI Air Unit V1, no wire is needed to be changed.
Blackbox microSD Card Slot	*Betaflight firmware requires the type of the microSD card to be either Standard (SDSC) or High capacity (SDHC) under 32GB, so extended capacity cards (SDXC) are not supported (Many high-speed U3 cards are SDXC). Also the microSD card MUST be formatted with the FAT16 or FAT32 (recommended) format. So, you could use any SD card less than 32GB, but the Betaflight can only recognize 4GB maximum. We suggest you use this 3rd party formatting tool and choose 'Overwrite format' then format your card. Also check out here for the recommended SD cards or buy the tested cards from our store.
Current Sensor Input	Supported. For SpeedyBee BLS 55A ESC, please set scale = 400 and Offset = 0.
Power Input	3S – 6S Lipo(Through G, BAT pins/pads from the 8-pin connector or 8-pads on the bottom side)
5V Output	9 groups of 5V output, four +5V pads and 1 BZ+ pad(used for Buzzer) on front side, and 4x LED 5V pads. The total current load is 3A.
9V Output	2 groups of 9V output, one +9V pad on front side and other included in a connector on bottom side. The total current load is 3A.
3.3V Output	Supported. Designed for 3.3V-input receivers. Up to 500mA current load.
4.5V Output	Supported. Designed for receiver and GPS module even when the FC is powered through the USB port. Up to 1A current load.
ESC Signal	M1 – M4 on bottom side and M5-M8 on front side.
UART	6 sets(UART1, UART2, UART3, UART4(Dedicated for Bluetooth connection)), UART5 (Dedicated for ESC telemetry),UART6
ESC Telemetry	UART R5(UART5)

I2C	Supported. SDA & SCL pads on front side. Used for magnetometer, sonar, etc.
Traditional Betaflight LED Pad	Supported. 5V, G and LED pads on bottom of the front side. Used for WS2812 LED controlled by Betaflight firmware.
Buzzer	BZ+ and BZ- pad used for 5V Buzzer
BOOT Button	Supported.
	[A]. Press and hold BOOT button and power the FC on at the same time will force the FC to enter DFU mode, this is for firmware flashing when the FC gets bricked.
	[B]. When the FC is powered on and in standby mode, the BOOT button can be used to controller the LED strips connected to LED1-LED4 connectors on the bottom side. By default, short-press the BOOT button to cycle the LED displaying mode. Long-press the BOOT button to switch between SpeedyBee-LED mode and BF-LED mode. Under BF-LED mode, all the LED1-LED4 strips will be controlled by Betaflight firmware.
RSSI Input	Supported. Named as RS on the front side.
Smart Port / F.Port	Not supported
Supported Flight Controller Firmware	BetaFlight(Default), INAV
Firmware Target Name	SPEEDYBEEF405V4
Mounting	30.5 x 30.5mm(4mm hole diameter)
Dimension	41.6(L) x 39.4(W) x 7.8(H)mm
Weight	10.5g


Part 3 – SpeedyBee BLS 55A 4-in-1 ESC

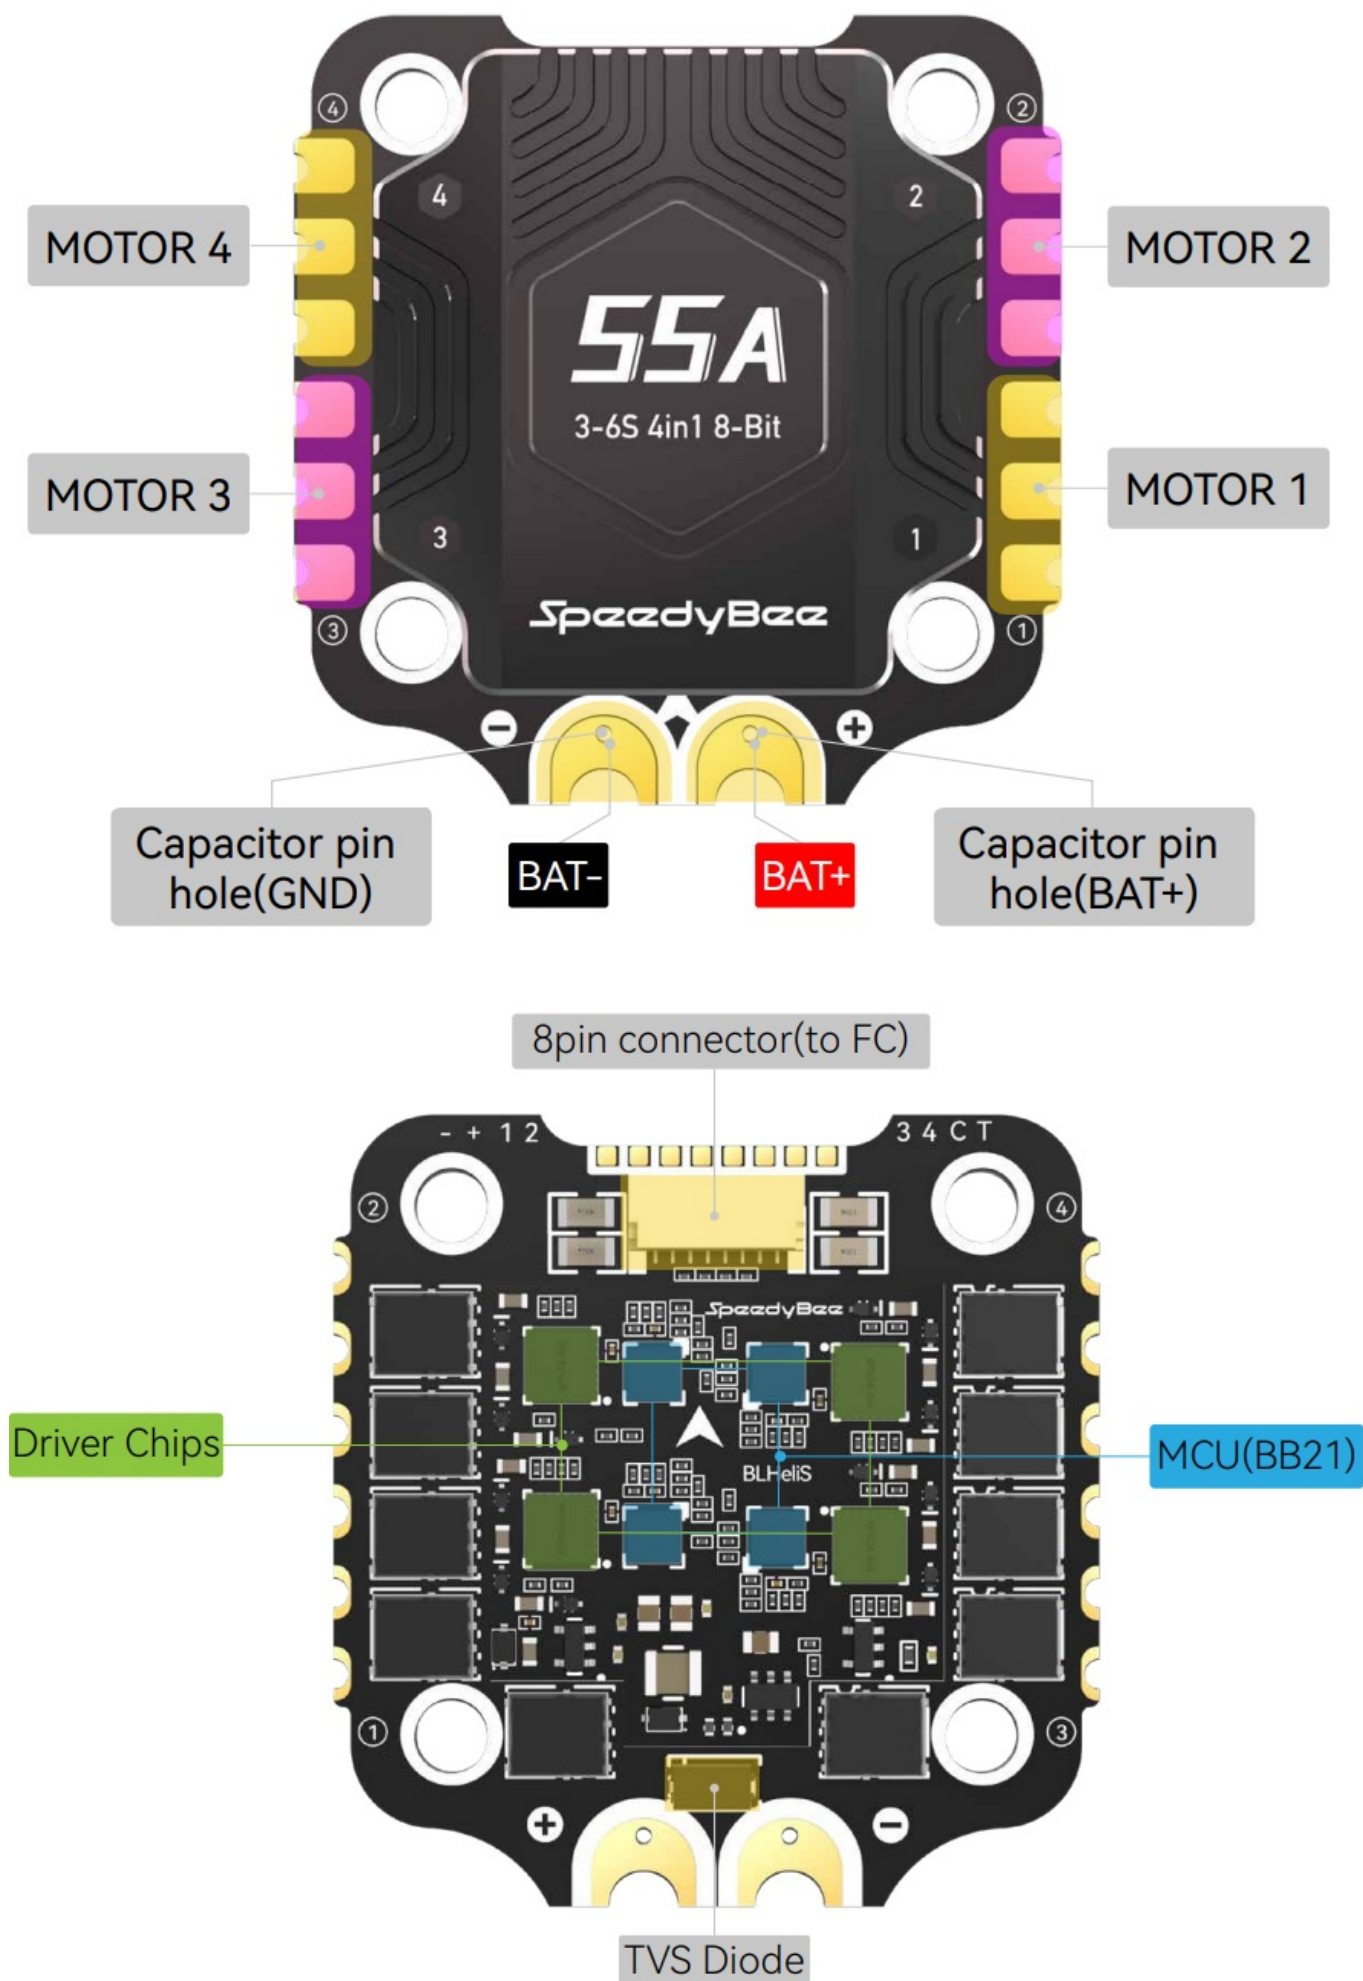


Connection with the flight controller & Motors

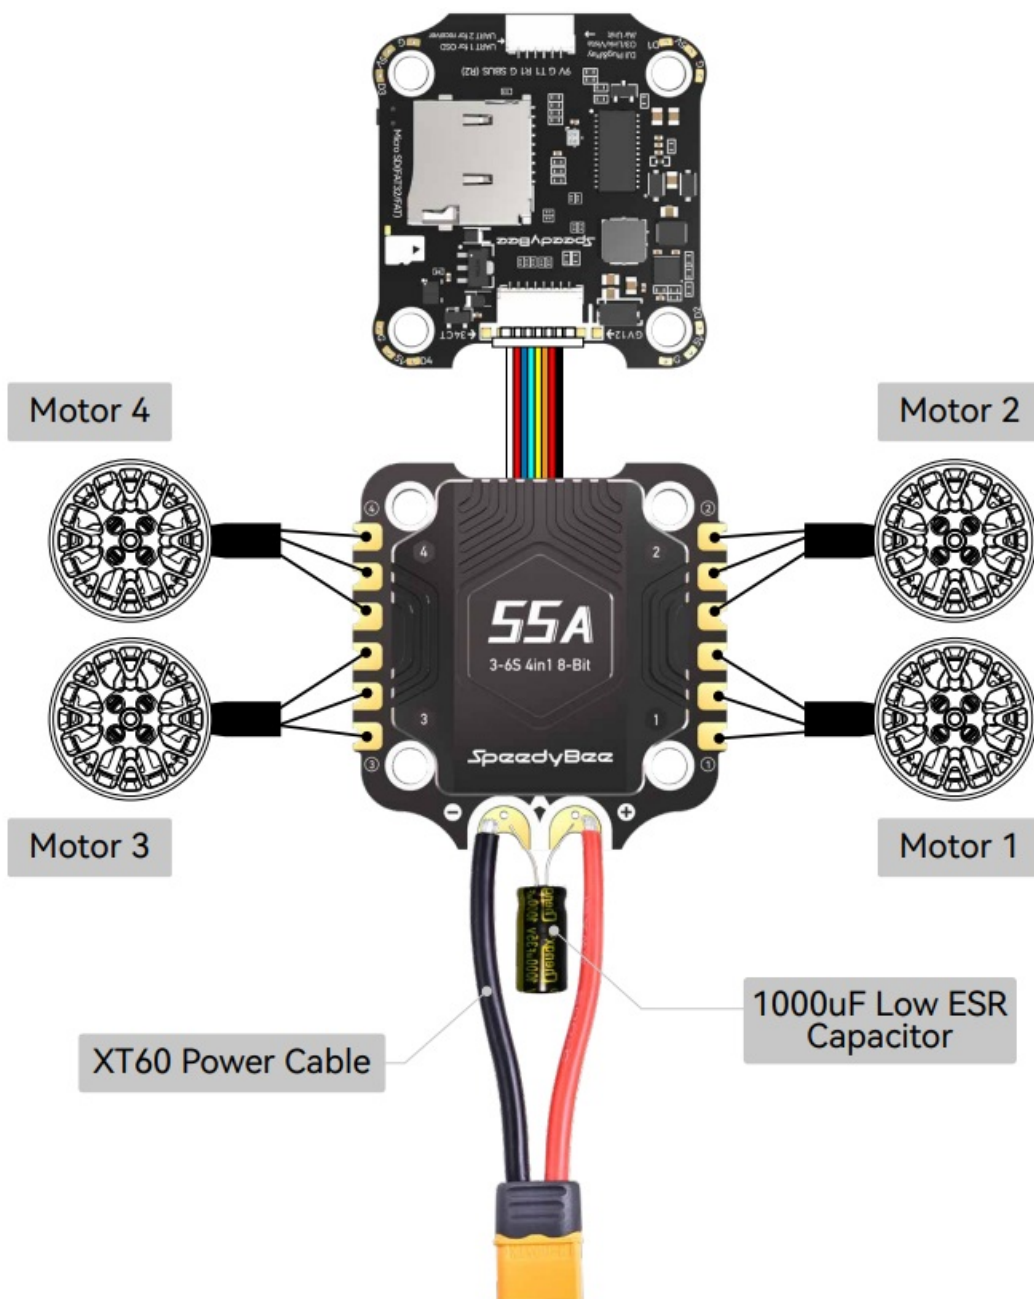

- Note1: In order to prevent the stack from being burnt out by voltage spikes on powering up, it is strongly recommended to use the Low ESR capacitor in the package.
- Note2: The FC and ESC can also connected via direct soldering. Soldering pads definition is as follows.

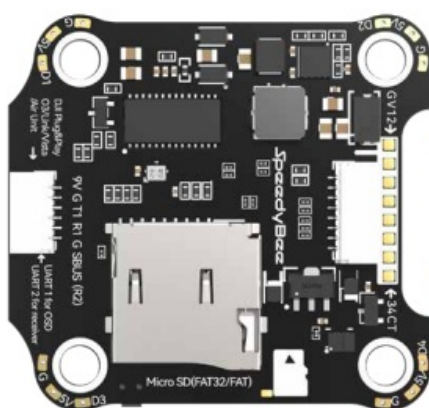


F405 V4 Flight Controller

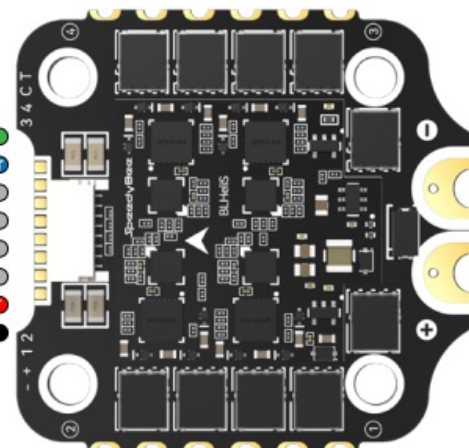

BLS 55A 4-in-1 ESC

ESC Configuration



- You could use the SpeedyBee APP to configure this ESC wirelessly for both BLHeli_S or Bluejay firmware.
Steps:

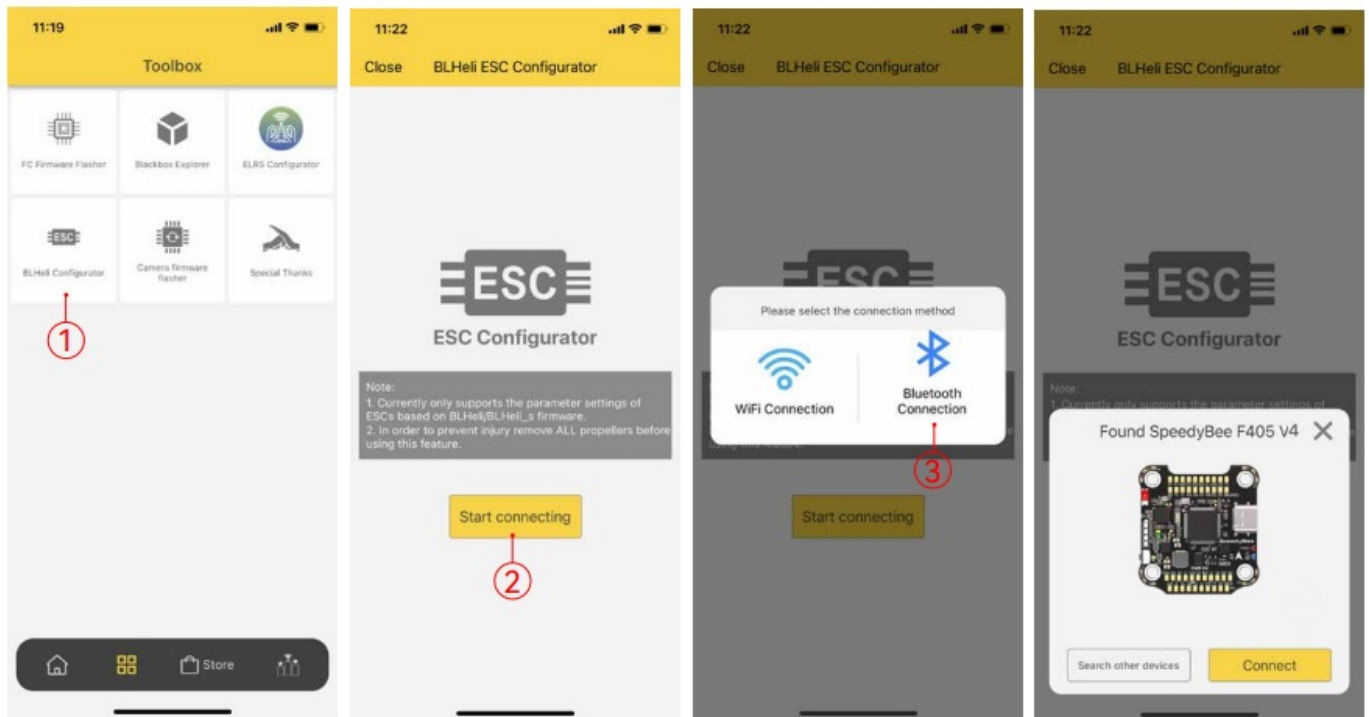


- You could also use PC configurators to configure this ESC. We recommend the ESC Configurator. Please use Google Chrome browser and visit: <http://www.esc-configurator.com>.

ESC Firmware Update

- This 8-bit 55A ESC can run BLHeliS or Bluejay firmware. It is loaded with BLHeliS firmware by default. You could also flash it to Bluejay firmware which can support RPM filtering and Bi-directional Dshot. Firmware flashing steps are as follows:?
- Remove all the propellers from your drone.
- Ensure that the flight controller is connected properly to the ESC, then power up the drone. This step ensures that the ESC starts up correctly.
- Connect the flight controller to the computer using a USB Type-C cable.
- Open the Chrome browser and visit the following website: <https://www.esc-configurator.com/>
- Follow the firmware flashing steps as shown in the screenshots below. Important note: On the 6th interface, the "ESC" type must be selected as "J-H-40".

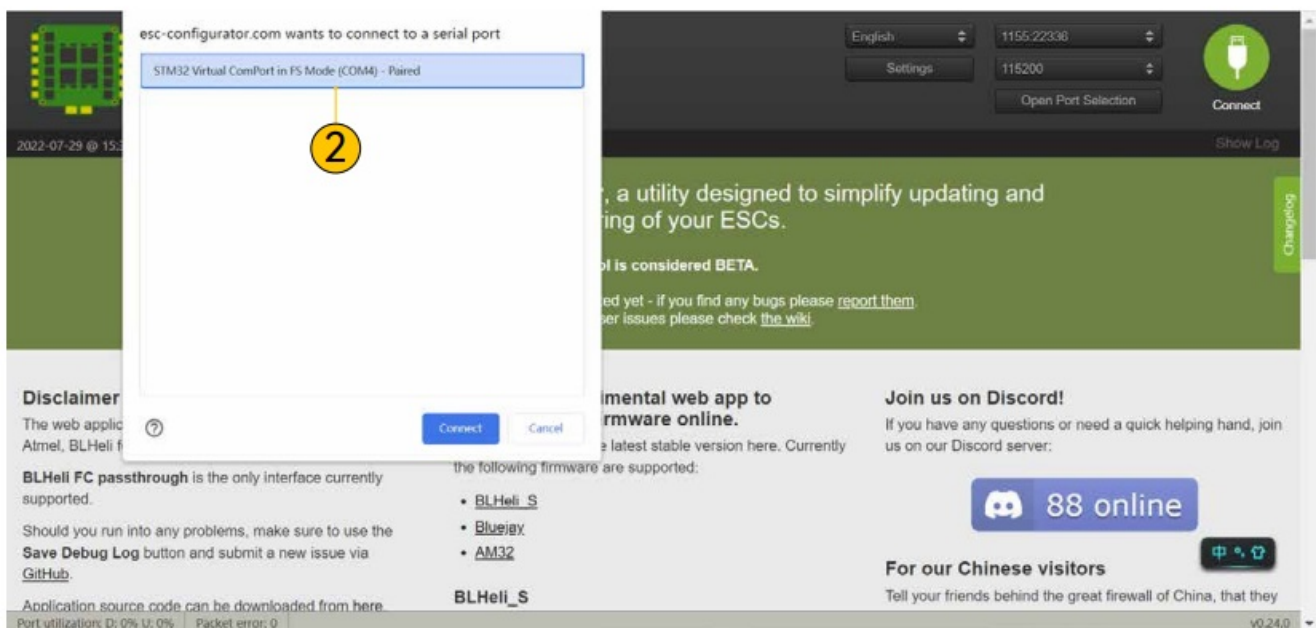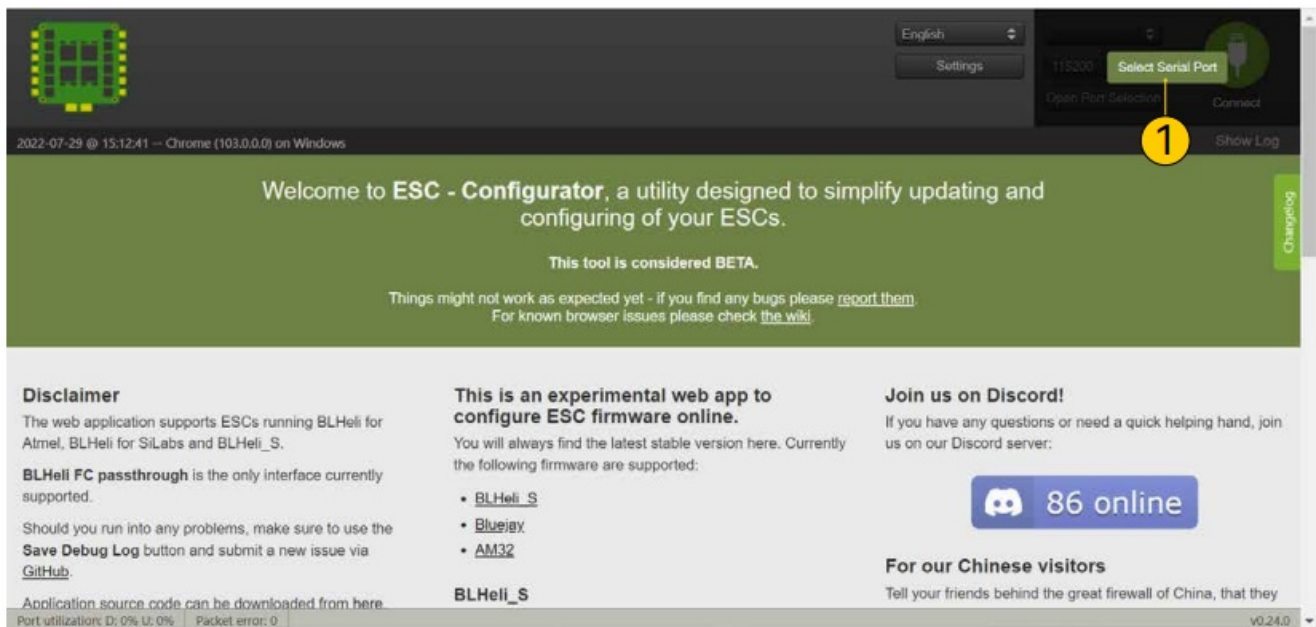



English1155.22336Settings115200Open Port SelectionConnectShow Log

2022-07-29 @ 15:23:54 -- Port selected

Welcome to **ESC - Configurator**, a utility designed to simplify updating and configuring of your ESCs.
This tool is considered BETA.
Things might not work as expected yet - if you find any bugs please [report them](#).
For known browser issues please check [the wiki](#).

Disclaimer

The web application supports ESCs running BLHeli for Atmel, BLHeli for SiLabs and BLHeli_S.

BLHeli FC passthrough is the only interface currently supported.

Should you run into any problems, make sure to use the **Save Debug Log** button and submit a new issue via [GitHub](#).

Application source code can be downloaded from [here](#).

This is an experimental web app to configure ESC firmware online.

You will always find the latest stable version here. Currently the following firmware are supported:

- [BLHeli_S](#)
- [Bluejay](#)
- [AM32](#)

BLHeli_S


Join us on Discord!

If you have any questions or need a quick helping hand, join us on our Discord server:

86 online

For our Chinese visitors
Tell your friends behind the great firewall of China, that they

Port utilization: D: 0% U: 0% Packet error: 0v0.24.0



English1155.22336Settings115200Open Port SelectionDisconnectShow Log

2022-07-29 @ 15:24:27 -- Unique device ID received - 0x04300423039510c353832236

Note: Make sure you've taken the propellers **OFF** before doing anything on this tab.
Note: Connect power to the ESCs.


Motor Control


Make sure your ESCs are properly set up to reflect the state of the sliders.
Eg.: When you enabled 3D mode in your flight controller, make sure the ESCs are also set up for 3D mode, otherwise the motors might go off with full power.


Also be aware that the motors will not spin if you have bi-directional Dshot enabled on the Flight-controller, but the ESC does not support it. Which might be the case when flashing from RPM enabled firmware to BLHeli_S.

☐ Enable motor control

Battery: 2S @ 7.16V

Motor 1
1000


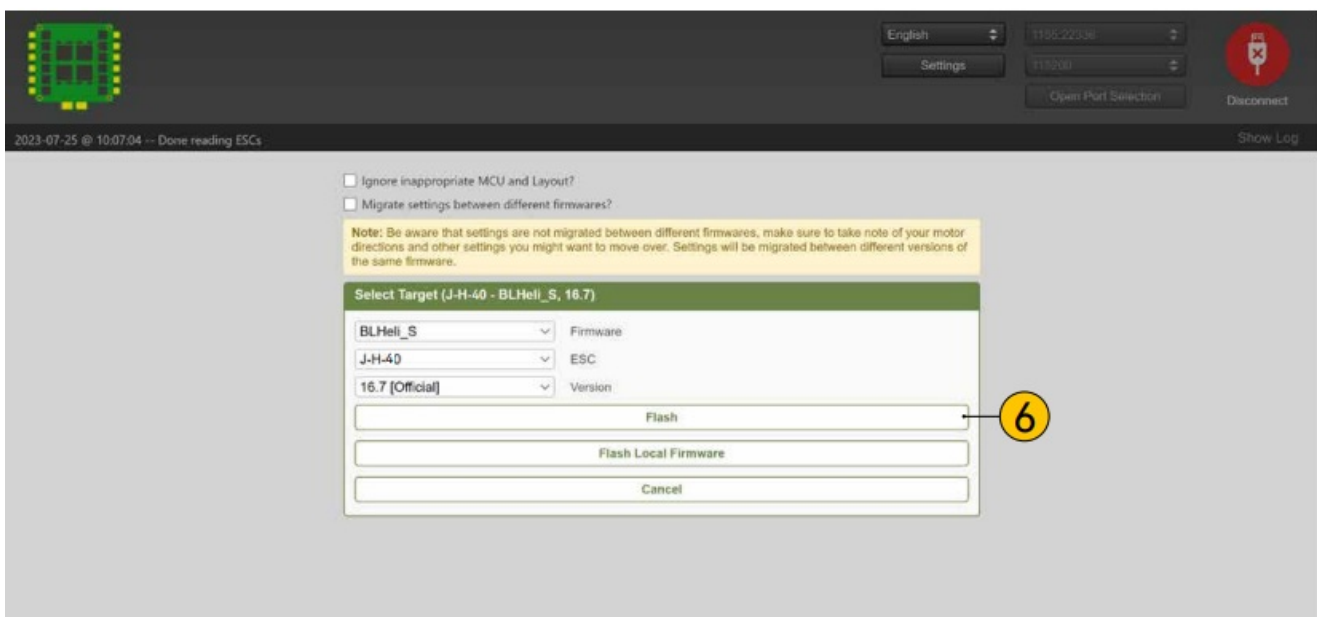
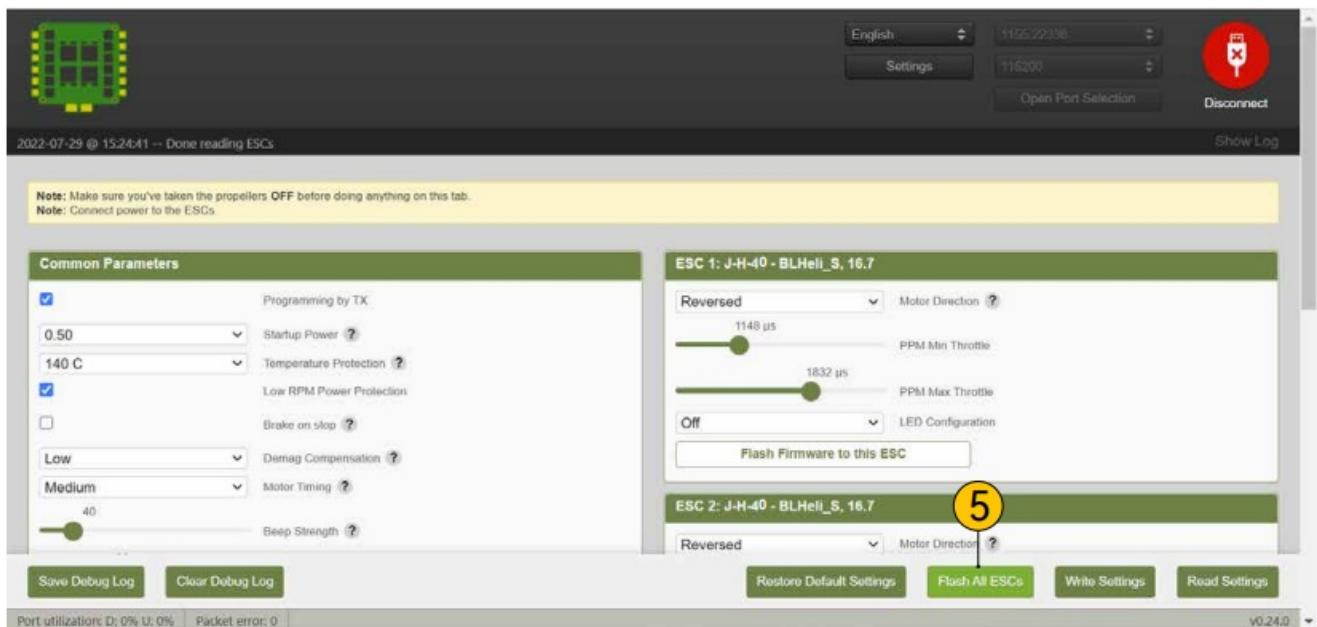
Motor 2
1000


Master Speed
1000


Save Debug LogClear Debug Log

Restore Default SettingsFlash All ESCsWrite SettingsRead Settings


Port utilization: D: 0% U: 0% Packet error: 0v0.24.0



Specifications

Product Name	SpeedyBee BLS 55A 30×30 4-in-1 ESC
Firmware	BLHeli_S J-H-40
PC Configurator Download Link	https://esc-configurator.com/
Continuous Current	55A * 4
Burst Current	70(10 seconds)
TVS Protective diode	Yes
External Capacitor	1000uF Low ESR Capacitor(In the package)
ESC Protocol	DSHOT300/600
Power Input	3-6S LiPo
Power Output	VBAT
Current Sensor	Support (Scale=400 Offset=0)
ESC Telemetry	Not supported
Mounting	30.5 x 30.5mm(4mm hole diameter)
Dimension	45.6(L) * 44(W) *8mm(H)
Weight	23.5g

Documents / Resources

	<p>SpeedyBee F405 V3 Flight Controller Stack [pdf] User Manual</p> <p>F405 V4 Flight Controller, BLS 55A 4-in-1 ESC, F405 V3 Flight Controller Stack, F405 V3, Flight Controller Stack, Controller Stack, Stack</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.