

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Speedlink](#) /

› [Speedlink Table Mount SL-650900-BK Instruction Manual for Drift OZ and Trailblazer Racing Wheels](#)

Speedlink SL-650900-BK

Speedlink Table Mount SL-650900-BK Instruction Manual

For Drift OZ and Trailblazer Racing Wheels

INTRODUCTION

This manual provides instructions for the proper setup, operation, and maintenance of your Speedlink Table Mount (Model SL-650900-BK). This mount is designed to securely attach compatible racing wheels to a table surface, enhancing your gaming experience. Please read these instructions carefully before use.

PRODUCT COMPATIBILITY

The Speedlink Table Mount is compatible with the following racing wheels:

- Speedlink DRIFT O.Z. Racing Wheel (for PC)
- Speedlink TRAILBLAZER Racing Wheel (for PC, PS4, PS3, Xbox, and Nintendo Switch)

SETUP INSTRUCTIONS

Follow these steps to properly install the Speedlink Table Mount and attach your racing wheel:

1. **Prepare the Table Surface:** Ensure your table surface is clean and stable. The table mount is designed for table tops with a maximum thickness of 40 millimeters.
2. **Position the Mount:** Place the racing wheel, with the table mount attached, onto the edge of your table where you intend to use it. Ensure the mount's clamp is positioned correctly under the table edge.
3. **Secure the Mount:** Tighten the hand screw on the table mount until it is firmly secured to the table. Ensure there is no movement or wobbling. The strong attachment provides maximum grip during use.

TABLE MOUNT

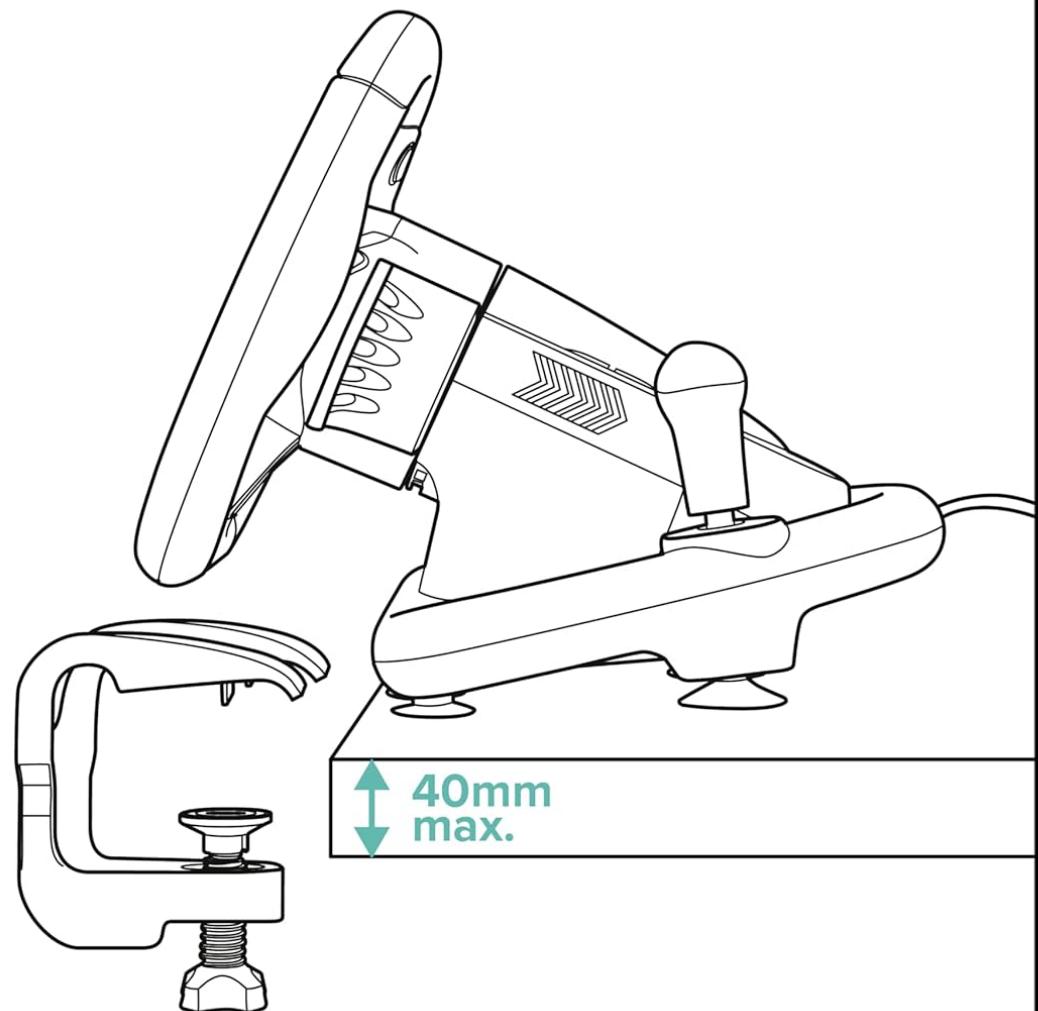


Figure 1: Diagram illustrating the table mount's attachment to a table, highlighting the 40mm maximum thickness.



Figure 2: Hands demonstrating the attachment of the table mount to a desk surface.



Figure 3: A racing wheel fully installed on the table mount, ready for use.

OPERATING INSTRUCTIONS

Once the table mount and racing wheel are securely installed, the system is ready for use. The robust design ensures stability during intense gaming sessions. No specific operational steps are required for the

mount itself beyond ensuring its secure attachment.

MAINTENANCE

To ensure the longevity and optimal performance of your Speedlink Table Mount, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the mount with a soft, dry cloth. Avoid using abrasive cleaners or solvents, as these can damage the material.
- **Check Tightness:** Periodically check the hand screw to ensure it remains tight and the mount is securely fastened to the table. Re-tighten if any looseness is detected.
- **Storage:** If not in use for an extended period, detach the mount and store it in a clean, dry place.

TROUBLESHOOTING

If you encounter issues with your Speedlink Table Mount, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Mount feels loose or wobbles	Hand screw not tightened sufficiently; table thickness exceeds 40mm.	Ensure the hand screw is fully tightened. Verify that your table thickness is within the 40mm limit.
Racing wheel is not stable on the mount	Improper attachment of the racing wheel to the mount.	Refer to your specific racing wheel's manual for instructions on how to properly attach it to a table mount. Ensure all connections are secure.

SPECIFICATIONS

Feature	Detail
Model Number	SL-650900-BK
Product Dimensions	6.77 x 8.62 x 5.51 inches
Item Weight	15.2 ounces
Maximum Table Thickness	40 millimeters
Attachment Method	Hand Screw Clamp

WARRANTY AND SUPPORT

For warranty information or technical support, please visit the official Speedlink website or contact their customer service department. Keep your purchase receipt as proof of purchase.

Official Speedlink Website: www.speedlink.com

