

StarTech CK4-D116C Secure 16 Port KVM Switch User Guide



Contents [[hide](#)]

[1 TECHNICAL SPECIFICATIONS](#)

[2 Documents / Resources](#)

[2.1 References](#)

TECHNICAL SPECIFICATIONS

VIDEO	
Format	DVI-I Dual Link, DVI 1.0, DVI-D, XVGA
Max. Pixel Clock	248 MHz
Input Interface	(16) DVI 23-pin
Output Interface	(1) DVI 23-pin
Resolution	Up to 4K (3840×2160@30Hz)
DDC	5 volts p-p (TTL)
Input Equalization	Automatic

Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
Data Rate	1.65 Gbps
USB	
Input Interface	(32) USB Type B
Output Interface	(2) USB 1.1 Type A for KM Devices
Emulation	USB 1.1 and USB 2.0 Compatible
CAC	Configurable USB 2.0 Port
AUDIO	
Audio Input	(16) 3.5mm stereo audio
Audio Output	(1) 3.5mm stereo audio
CONTROL	
Front Panel	Front panel SELECT buttons
OTHER	
Power	External 100-240 VAC/ 12VDC3A @ 36W
Dimensions	17.0" W x 2.7" H x 8.69" D
Weight	6.9 lbs
Approvals	NIAP PP 4.0, UL, CE, ROHS Compliant
Operating Temp.	+32 to +104°F (0 to +40°C)
Storage Temp.	-4 to 140°F (-20 to +60°C)
Humidity	Up to 80% (no condensation)

WHAT'S IN THE BOX

Video	QTY	Description
CK4-D116C	1	Secure 16-Port, SH DVI KVM Switch with CAC
12VDC3A	1	12V DC, 3A power adapter with center-pin positive polarity.
(blank)	1	Quick Start Guide

NOTICE

The information contained in this document is subject to change without notice. StarTech.com makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose. StarTech.com will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from StarTech.com, Ltd.

EDID LEARN

The KVM is designed to learn the connected monitor's EDID upon power up. In the event of connecting a new monitor to the KVM, a power recycle is required.

The KVM will indicate to the user the EDID learn process by flashing the front panel's LEDs. Port one green and push button blue LEDs will both begin to flash for about 10 seconds. When the LEDs stop flashing the EDID learn process is done.

If the KVM has more than one video board (such as dual-head and quad-head models), then the unit will continue to learn the EDIDs of the connected monitors and indicate the progress of the process by flashing the next port selection green and push button blue LEDs respectively.


The monitor must be connected to the video output connector located in the console space at the back of the KVM during the EDID learn process.

If the read EDID from the connected monitor is identical to the current stored EDID in the

KVM then the EDID learn function will be skipped.

HARDWARE INSTALLATION

1. Ensure that power is turned off or disconnected from the unit and the computer.
2. Use a DVI cable to connect the DVI output port from the computer to the corresponding DVI-I IN port of the unit.
3. Use a USB cable (Type-A to Type-B) to connect a USB port on the computer to the respective USB ports of the unit.
4. Optionally, for CAC models, connect a CAC (Common Access Card, Smart Card Reader) to the CAC port in the user console interface.
5. Optionally, connect a stereo audio cable (3.5 mm to 3.5 mm) to connect the audio output of the computer(s) to the audio in ports of the unit.
6. Connect a monitor to the DVI-I OUT console port of the unit using a DVI cable.
7. Connect a USB keyboard and mouse in the two USB console ports
8. Optionally, connect stereo speakers to the audio out port of the unit
9. Finally, power on the KVM by connecting a 12VDC power supply to the power connector, and then turn on the computer.

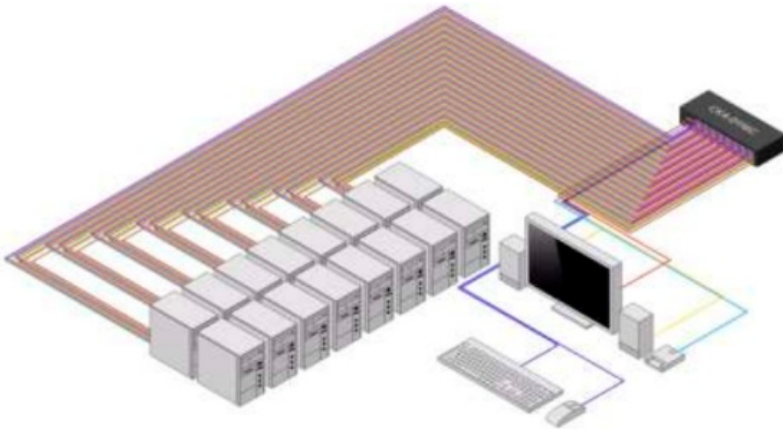

Note: The computer connected to port 1 will always be selected by default after power up.

Note: You can connect 16 computer to the 16 port KVM

	DVI IN
	USB K/M IN
	USB CAC IN
	AUDIO IN
	DVI OUT
	USB K/M OUT
	USB CAC OUT
	AUDIO OUT



Documents / Resources

	StarTech CK4-D116C Secure 16 Port KVM Switch [pdf] User Guide NIAP, DVI, CAC, CK4-D116C Secure 16 Port KVM Switch, CK4-D116C, Secure 16 Port KVM Switch, 16 Port KVM Switch, KVM Switch
---	--

References

- [User Manual](#)

StarTech

16 Port KVM Switch, CAC, CK4-D116C, CK4-D116C Secure 16 Port KVM Switch, DVI, KVM Switch, NIAP, Secure 16 Port KVM Switch, StarTech

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.