

[Manuals.plus](#) /

> [FIREGAS](#) /

> FIREGAS 60 cm Under Cabinet Range Hood Instruction Manual FGS-ESF23A360AC


FIREGAS FGS-ESF23A360AC

FIREGAS 60 cm Under Cabinet Range Hood

Model: FGS-ESF23A360AC

INTRODUCTION

This manual provides essential information for the safe and efficient operation, installation, and maintenance of your FIREGAS 60 cm Under Cabinet Range Hood. Please read these instructions carefully before use and retain them for future reference.

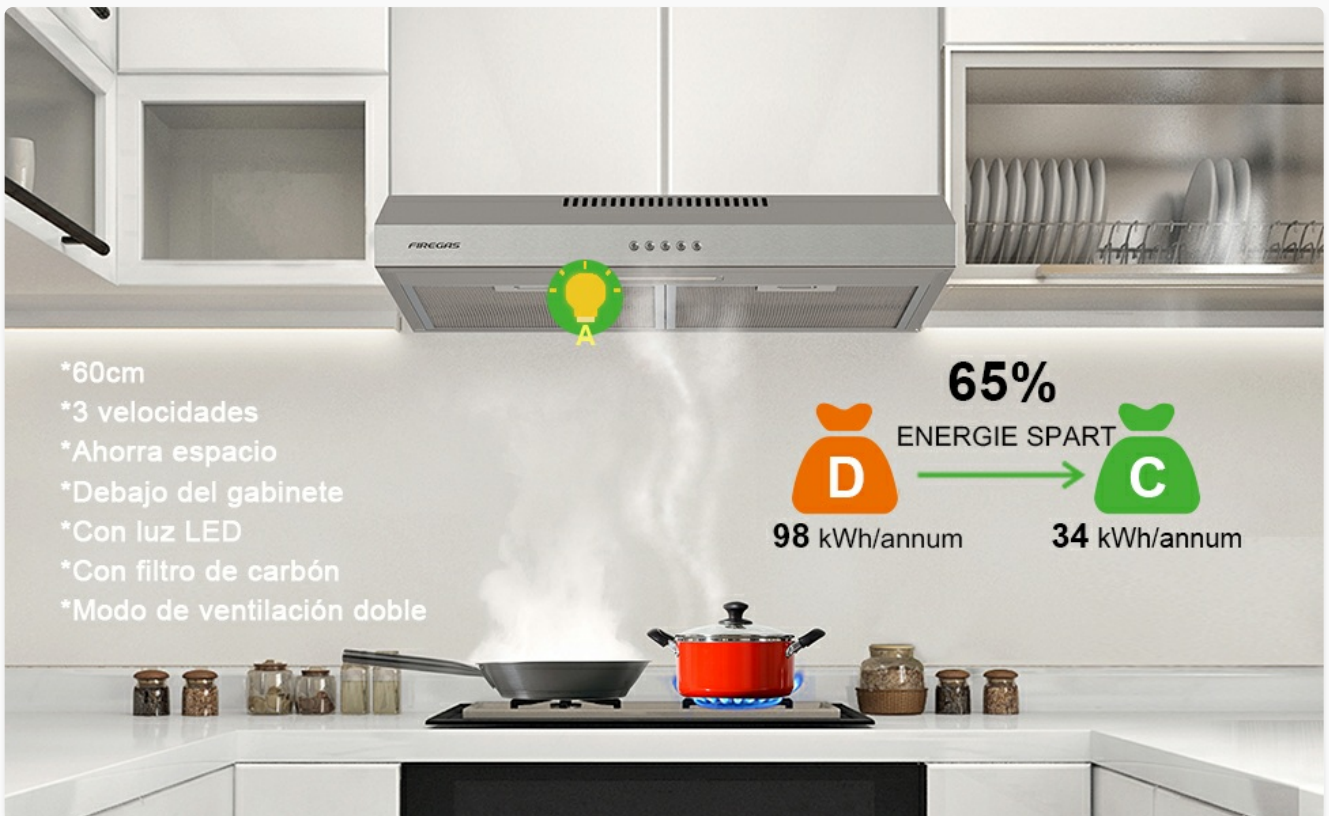

- *60cm
- *3 velocidades
- *Ahorra espacio
- *Debajo del gabinete
- *Con luz LED
- *Con filtro de carbón
- *Modo de ventilación doble

65% ENERGIE SPART

D 98 kWh/annum → **C** 34 kWh/annum

Image: FIREGAS 60 cm Under Cabinet Range Hood installed in a modern kitchen setting.

SAFETY INFORMATION

Always follow basic safety precautions when using electrical appliances to reduce the risk of fire, electric shock, and injury. Ensure the appliance is properly grounded. Do not operate the range hood if the power cord is damaged. Keep children away from the appliance during operation.

SETUP AND INSTALLATION

The FIREGAS 60 cm Under Cabinet Range Hood is designed for easy installation under a cabinet, optimizing kitchen space. The package includes all necessary installation instructions and drawings for self-installation.

Package Contents:

- Range Hood Unit
- Aluminum Grease Filters (2)
- Activated Carbon Filter (for recirculation mode)
- Mounting Screws and Wall Plugs
- Instruction Manual
- Air Outlet and Vent Cover
- Damper



1 x 2W LED Light
Offer enough brightness to meet your cooking need.



No Flicker



No Glare



Energy-Saving



Eco-Friendly



Image: Contents of the FIREGAS range hood package, showing the charcoal filter, damper, screws, air outlet, vent cover, and instruction manual.

Mounting and Electrical Connection:

The range hood is designed for under-cabinet mounting. Ensure adequate clearance above the cooking surface as specified in the detailed installation drawings. The unit comes with a 1.65 m power cord and a 2-pin plug for electrical connection.



Image: Side view of the range hood, highlighting the power cord and the circular exhaust port.

Ventilation Modes:

This range hood supports two ventilation modes:

1. **Recirculation Mode:** Oil smoke is filtered through the included activated carbon filter, and fresh air is discharged back into the kitchen. No external ducting is required.
2. **Exhaust Mode:** Smoke is directly extracted and discharged through an exhaust opening ($\varnothing=120$ mm). An activated carbon filter is not required for this mode.

Modo de ventilación doble

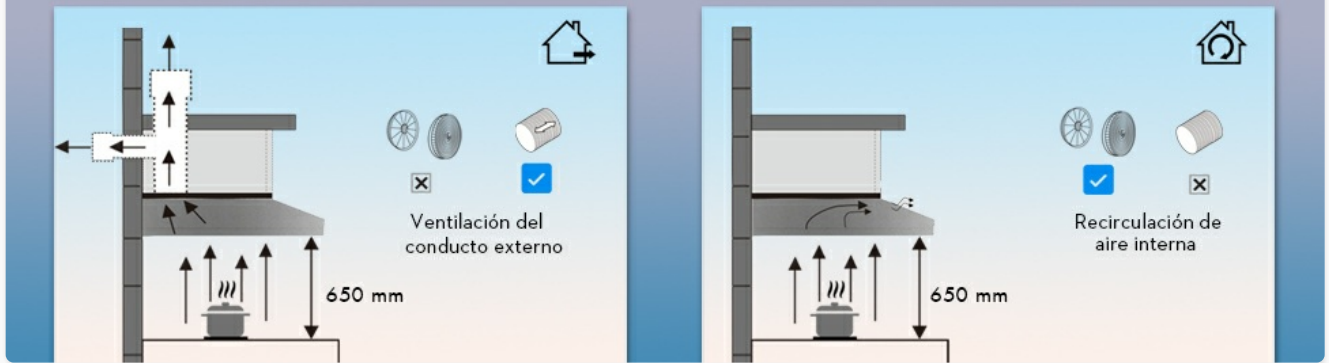


Image: Diagram showing the two ventilation modes: external ducting and internal recirculation.

OPERATING INSTRUCTIONS

The range hood features a simple push-button control panel for fan speed and lighting.

Fan Speed Control:

The range hood offers 3 fan speeds. The maximum air volume is 201.55 m³/h. The maximum noise level during operation does not exceed 70 decibels, ensuring a comfortable cooking environment.

- **Button 0:** Off
- **Button 1:** Low Speed
- **Button 2:** Medium Speed
- **Button 3:** High Speed



3-Speed Push Button

Simple operate and sensitive reaction.
Easy to turn on and off.



Image: Close-up of the push-button control panel, indicating the 3 fan speeds and light control.

LED Lighting:

The range hood is equipped with one 2W LED light to provide sufficient illumination for your cooking area. Press the light button to turn the LED light on or off.

PACKAGE INCLUDES





Charcoal Filter
Model No. : CC130



Damper



Screws



Air outlet



Vent cover


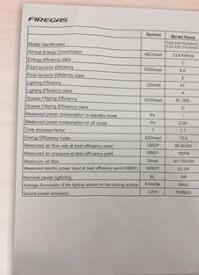


Image: The FIREGAS range hood with its LED light illuminated, providing brightness over a cooking surface.

MAINTENANCE

Regular cleaning and maintenance will ensure the longevity and optimal performance of your range hood.

Grease Filters:

The range hood features two washable multi-layer aluminum mesh grease filters. These filters are designed for easy removal and cleaning. They can be washed by hand with warm soapy water or in a dishwasher.



60 cm. Under Cabinet Range Hood with 200 m³/h

The bottom can cover the source of smoke to prevent diffusion
powerful exhaust fan can effectively removes smoke and odors.

Image: Underside view of the range hood, clearly showing the two removable aluminum mesh grease filters.

Activated Carbon Filter (for recirculation mode):

If using the range hood in recirculation mode, the activated carbon filter should be replaced periodically, typically every 3-6 months depending on usage. Refer to the specific carbon filter model (CC130) for replacement instructions.

Exterior Cleaning:

The hood is constructed from high-quality brushed stainless steel. Clean the exterior surfaces with a soft cloth and a mild, non-abrasive cleaner. Avoid using harsh chemicals or abrasive pads that could damage the finish.

TROUBLESHOOTING

If you encounter any issues with your range hood, please refer to the following common troubleshooting steps:

- **No power:** Check if the power cord is securely plugged into an outlet and if the circuit breaker has tripped.
- **Fan not working:** Ensure the fan speed button is pressed. Check for any obstructions in the fan or ductwork.

- **Poor extraction:** Clean or replace the grease filters. If in recirculation mode, check if the carbon filter needs replacement. Ensure there are no blockages in the exhaust duct (if applicable).
- **Excessive noise:** Check if the filters are correctly installed. Ensure the range hood is securely mounted and that there are no loose parts.

For persistent issues, please contact customer support.

SPECIFICATIONS

Feature	Specification
Model Number	FGS-ESF23A360AC
Dimensions (D x W x H)	48 cm x 59.5 cm x 10 cm
Weight	5.76 kg
Material	Stainless Steel
Airflow Capacity	201.55 m ³ /h
Noise Level	Max 70 dB (57 dB stated in some specs)
Number of Speeds	3
Control Type	Push Button
Lighting	1 x 2W LED
Power	60 Watts
Voltage	220V
Filter Type	Aluminum Mesh, Activated Carbon (for recirculation)
Mounting Type	Under Cabinet
Ventilation Type	Convertible (Ducting or Recirculation)

WARRANTY AND SUPPORT

Product Warranty:

This FIREGAS range hood comes with a one-year limited warranty from the date of purchase. Please retain your proof of purchase for warranty claims.

Customer Support:

If you have any questions, require technical assistance, or need to make a warranty claim, our customer service team is available to assist you. Please refer to the contact information provided with your purchase or visit the official FIREGAS store on Amazon: [FIREGAS Store](#).

Patent Number: 008878524-0002.

