



strands 270491 Siberia Relay Socket Set Instructions

[Home](#) » [Strands](#) » strands 270491 Siberia Relay Socket Set Instructions 

Contents

- 1 strands 270491 Siberia Relay Socket Set
- 2 SIBERIA RELAY SOCKET SET
- 3 READ THIS BEFORE INSTALLATION
- 4 INSTALLATION
- 5 Documents / Resources
 - 5.1 References
- 6 Related Posts




strands 270491 Siberia Relay Socket Set



SIBERIA RELAY SOCKET SET

- BLACK (85) = -CHASSIS GROUND/-12/24V (3mm²)
- BLACK (85) = -GROUND TO LIGHT (3mm²)
- DC RED (30) = +12/24V DC (20A FUSE) (3mm²)
- BROWN (86) = +SIGNAL (0.84mm²)
- BLUE (87a) = +POWER OUTPUT 2 (2mm²)
- RED (87) = +POWER OUTPUT 1 (3mm²)

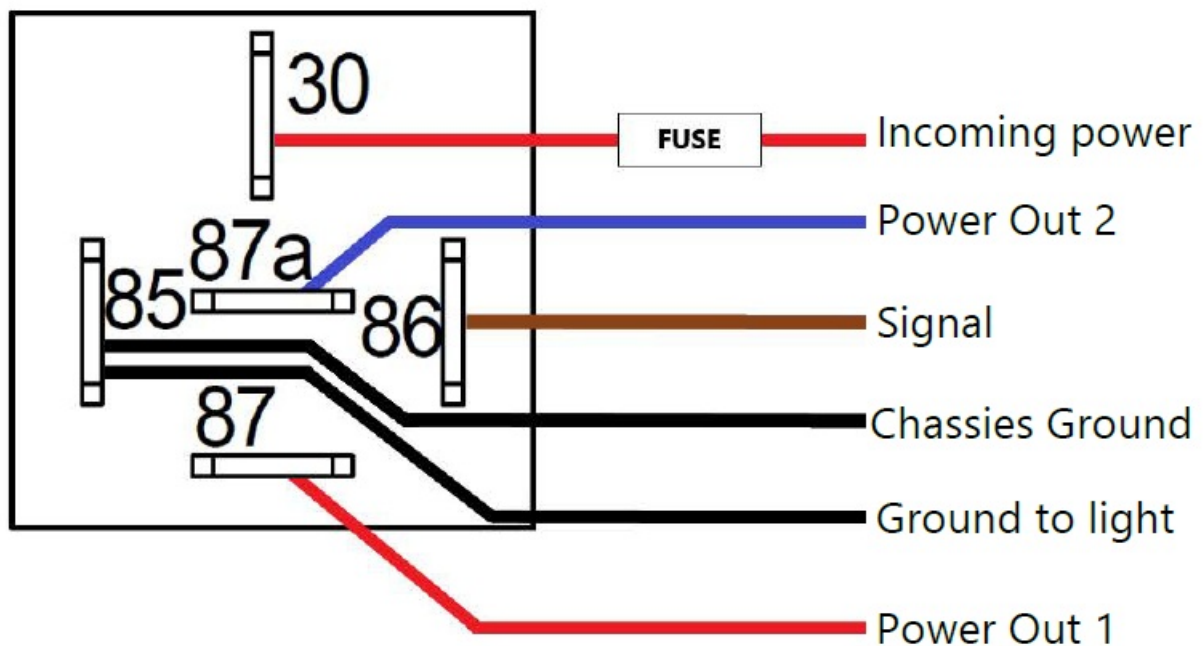

READ THIS BEFORE INSTALLATION

READ ALL INSTRUCTIONS AND STUDY DIAGRAMS BEFORE INSTALLING YOUR NEW WIRING KIT.

INSTALLATION

- Incoming cables (85/30) = 75cm, 3mm²
- Power output 1 (87) = 50cm, 3mm²
- Power output 2 (87a) = 50cm, 2mm²
- Signal cable (86) = 50cm, 0.84mm²


20A fuse. Recommended max consumption is 240W on both 12V DC and 24V DC. The kit includes Relay socket with pre-mounted cables, 2x blue duraseal, 2x red duraseal. Blue cable (87a) second output can be used with a multifunctional relay.

WARNING!

Make sure that the cable does not touch parts that could become hot, and cause the cable to melt. Do not use higher volts than the product description states.

Contact us if you need support: support@strands.se or +46(0)320-450450 www.strands.se
www.strandseurope.com

Documents / Resources

	strands 270491 Siberia Relay Socket Set [pdf] Instructions 270491, Siberia Relay Socket Set
--	--

References

-  [Hem - Strands](#)
-  [Hem - Strands](#)