

[Manuals.plus](#) /

› [zeerobee](#) /

› Zeerobee 1-Inch Industrial Wrap-Around Black Curtain Rod (48"-86") Instruction Manual

zeerobee Skmst48BK

Zeerobee 1-Inch Industrial Wrap-Around Black Curtain Rod (48"-86") Instruction Manual

Brand: Zeerobee | Model: Skmst48BK

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Zeerobee 1-Inch Industrial Wrap-Around Black Curtain Rod. Please read these instructions carefully before beginning installation to ensure proper setup and safe use.

The Zeerobee curtain rod is designed for durability and functionality. It features a 1-inch diameter and 0.8 mm thickness, connected by helical threads for enhanced stability, reducing the risk of bending or sagging. It can support up to 30 pounds, making it suitable for light, medium, or heavy curtains.


Its matte black finish and industrial design complement various home decor styles, including modern and farmhouse aesthetics. The wrap-around design helps to block unwanted light, enhance privacy, and reduce noise, contributing to energy efficiency.

2. PACKAGE CONTENTS

Before installation, verify that all components are present. The package typically includes:

- Curtain Rods (multiple sections, quantity varies by size)
- Elbow Finials (2 pieces)
- Adjustable Brackets (quantity varies by size)
- Screws (for mounting)
- Anchors (for drywall installation)
- Wrench (for assembly)
- Installation Instructions (this manual)

Package Included 48"-86"

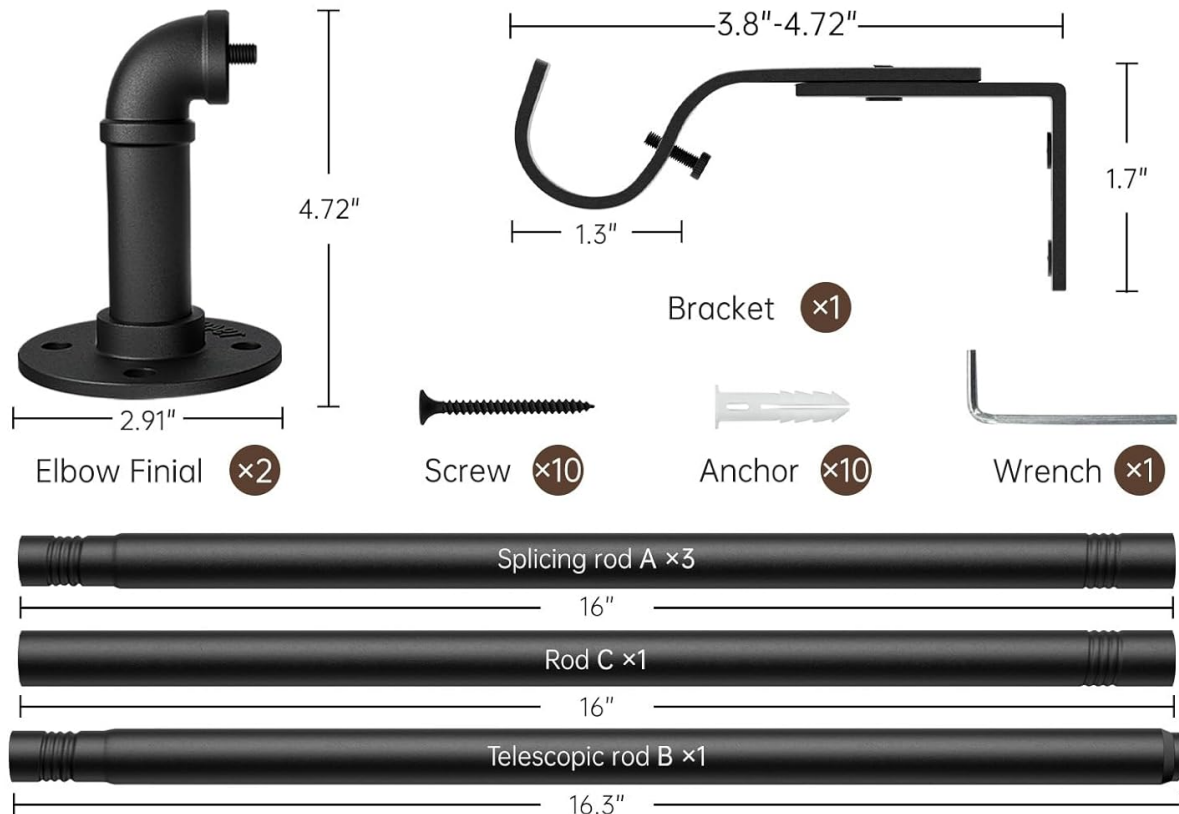

The curtain rod is assembled by connecting multiple 16-inch rods

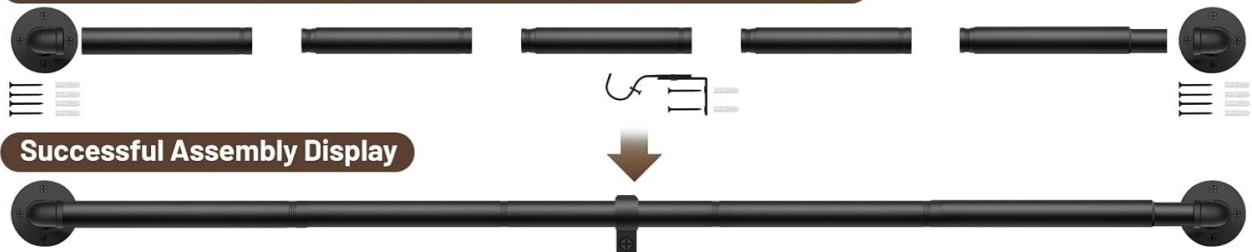


Image: Detailed view of all components included in the Zeerobee curtain rod package for the 48"-86" size, showing splicing rods, telescopic rod, elbow finials, bracket, screws, anchors, and wrench.






3. SETUP AND INSTALLATION

The Zeerobee curtain rod offers flexible installation options: wall-mounted or ceiling-mounted. Follow these steps for a secure installation:

- 1. Measure and Mark:** Measure the width of your window. For optimal light blocking and privacy, extend the rod beyond the window frame by at least 2-6 inches on each side. Mark the desired positions for the brackets.
- 2. Drill Holes:** Using a drill, create pilot holes at the marked locations. If installing into drywall, insert the provided anchors. For wood walls, drill directly.
- 3. Attach Brackets:** Secure the adjustable brackets to the wall or ceiling using the provided screws. Ensure they are level and firmly attached.
- 4. Assemble Rod:** Connect the various rod sections by screwing them together. The 48"-86" model typically includes multiple 16-inch splicing rods and one telescopic rod. Adjust the length as needed.
- 5. Insert Curtains:** Slide your curtains onto the assembled rod before attaching the finials.

6. **Attach Finials and Mount Rod:** Insert the 1-inch rod through the elbow finials and tighten them. Position the telescopic rod in the middle of the curtain rod and mount it onto the installed brackets. Tighten any screws on the brackets to secure the rod in place.

INSTALLATION GUIDE

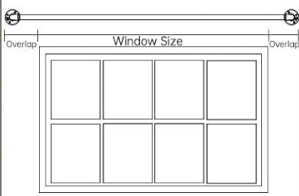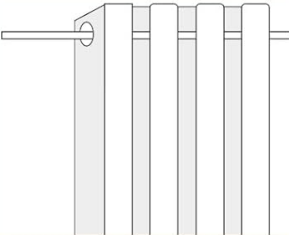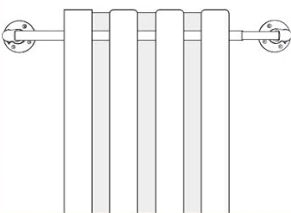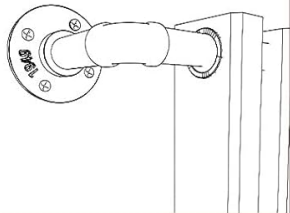Wood walls  Other walls 	 Measure the size of the window and the length to be reserved at both ends.	 Mark the drill hole position of the brackets.	 Punching holes at the marked locations.
 Put the curtain through the curtain rod.	 Position the telescopic bracket in the middle of the curtain rod and mount it on the wall.	 Put the 1-inch rod through the bracket and tight into the elbow end.	 You will get a perfect curtain rod.

HOW TO REMOVE THE CURTAIN ROD QUICKLY?



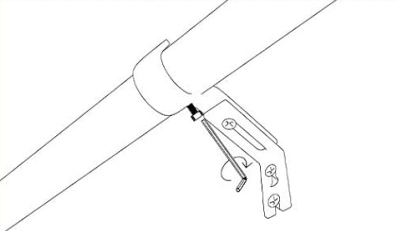
 Use a wrench to loosen the screws on the middle bracket.	 Unscrew the end expansion tube in reverse	 Remove telescopic rod B and take down the curtains.
---	--	--

Image: Visual installation guide demonstrating the steps from measuring to final curtain rod placement.

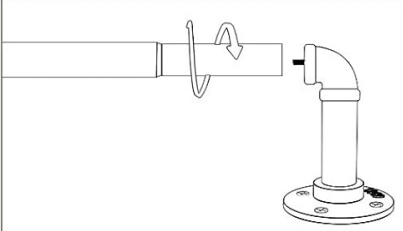

Ceiling Mount

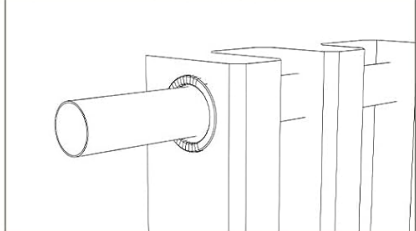

Wall Mount



Image: Illustration of the two mounting options: wall mount and ceiling mount, highlighting the versatility of the brackets.

Installation Video Guide

Your browser does not support the video tag.

Video: Official ZeerobeeDirect installation video demonstrating the assembly and mounting process of the curtain rod.

4. USAGE

The Zeerobee curtain rod is designed to accommodate various curtain styles, providing flexibility for your decor needs. Its wrap-around design ensures curtains can extend to the wall, effectively blocking light and enhancing privacy.

Compatible Curtain Types:

- **Grommet Curtains:** Easily slide through the rod's smooth surface.
- **Rod Pocket Curtains:** The rod fits perfectly through the sewn pocket.
- **Tab-Top Curtains:** Tabs can be looped over the rod for a relaxed look.
- **Ring Curtains:** Rings attached to curtains can slide along the rod.

Suits all types of curtains, such as grommet, rod pockets, and tab-top curtains.

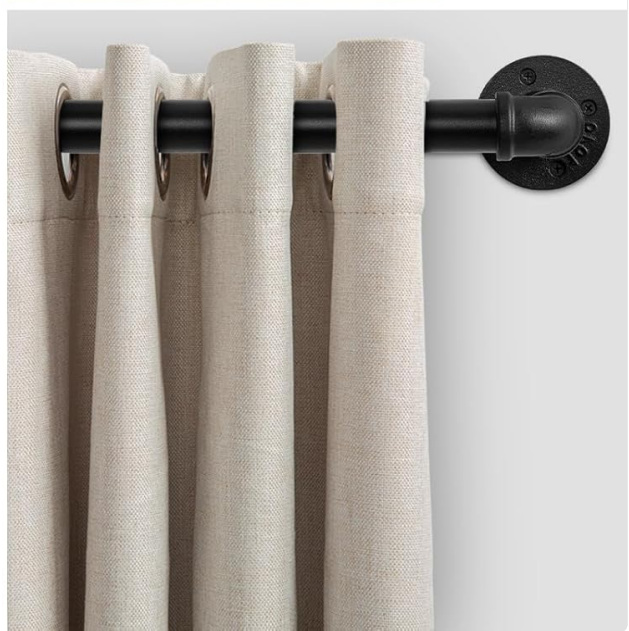


Image: Examples of the curtain rod supporting various curtain styles, including grommet, rod pocket, and tab-top designs.

The unique wrap-around design helps block out unwanted light and enhance privacy.

1-Inch
(2.54cm)
Diameter



Image: Detail of the unique wrap-around design, illustrating its effectiveness in blocking light and enhancing privacy.

5. MAINTENANCE

To ensure the longevity and appearance of your Zeerobee curtain rod, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the rod and finials periodically with a soft, dry cloth to remove dust. For stubborn marks, use a slightly damp cloth with mild soap, then dry immediately. Avoid abrasive cleaners or harsh chemicals, as these can damage the matte finish.
- **Inspection:** Periodically check all screws and connections to ensure they remain tight. Re-tighten if necessary to prevent sagging or instability.
- **Load Capacity:** Do not exceed the maximum weight recommendation of 30 pounds to prevent bending or damage to the rod and mounting hardware.

6. TROUBLESHOOTING

If you encounter any issues with your curtain rod, consider the following common solutions:

- **Rod is Sagging:** Ensure all rod sections are securely screwed together and that the brackets are firmly attached to the wall/ceiling. Check that the weight of your curtains does not exceed the 30-pound capacity. Add an additional central bracket for longer rods or heavier curtains if needed.
- **Difficulty Adjusting Length:** The telescopic rod allows for length adjustment. Ensure the internal mechanism is clean and free of debris. If it feels stiff, gently twist and pull/push while applying minimal force.
- **Curtains Don't Slide Smoothly:** Check for any obstructions on the rod or within the curtain grommets/pockets. Ensure the rod is level.
- **Finials Loose:** Tighten the elbow finials by hand or with the provided wrench until snug.

If problems persist, please contact Zeerobee customer support for further assistance.

7. SPECIFICATIONS

Brand	zeerobee
Model Number	Skmst48BK
Color	Black
Material	Iron
Product Dimensions (L x W)	17.14"L x 2.76"W (packaged)
Adjustable Length	48" to 86" (7.17 ft)
Rod Diameter	1 Inch
Rod Thickness	0.8 mm
Maximum Weight Recommendation	30 Pounds
Mounting Type	Wall Mounted & Ceiling Mounted
Item Weight	2.97 Pounds
Included Components	Curtain Rods, Elbow Finials, Adjustable Brackets, Screws, Anchors, Wrench, Installation Instructions

Heavy Duty Curtain Rod



Image: Visual representation of the rod's strength and dimensions, highlighting its 30lb load capacity.

8. WARRANTY AND SUPPORT

For any questions, concerns, or warranty information regarding your Zeerobee curtain rod, please contact Zeerobee customer support through the retailer where the product was purchased or visit the official Zeerobee website. Please retain your proof of purchase for warranty claims.