

**SCT-HDBT3KVM-
TRX HDBT 3.0
KVM Transceiver**



syscomtec SCT-HDBT3KVM-TRX HDBT 3.0 KVM Transceiver User Manual

[Home](#) » [syscomtec](#) » syscomtec SCT-HDBT3KVM-TRX HDBT 3.0 KVM Transceiver User Manual 

Contents

- 1 syscomtec SCT-HDBT3KVM-TRX HDBT 3.0 KVM Transceiver
- 2 Specifications
- 3 SAFETY PRECAUTIONS
- 4 Introduction
- 5 Installation and Wiring
- 6 Wiring
- 7 DIP Switch Settings
- 8 Customer Service
- 9 MORE INFORMATION
- 10 FAQ
- 11 Documents / Resources
 - 11.1 References



syscomtec SCT-HDBT3KVM-TRX HDBT 3.0 KVM Transceiver



Specifications

- **Product Name:** SCT-HDBT3KVM-TRX
- **Model:** HDBT 3.0 KVM Transceiver
- **Version:** V1.0.1
- **Transmission:** Up to 4K@60Hz 4:4:4 8-bit over 100m Cat 6a cable

Preface

- Read this user manual carefully before using the product. The pictures shown in this manual are for reference only. Different models and specifications are subject to real products.
- This manual is only for operation instruction, please contact the local distributor for maintenance assistance. The functions described in this version were updated till June 2021. In the constant effort to improve the product, we reserve the right to make functions or parameters changes without notice or obligation. Please refer to the dealers for the latest details.

SAFETY PRECAUTIONS

To ensure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment.
- Follow basic safety precautions to reduce the risk of fire, electrical shock, and injury to persons.
- Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration, or

malfunction.

- Refer all servicing to qualified service personnel.
- To prevent fire or shock hazards, do not expose the unit to rain, or moisture or install this product near water.
- Do not put any heavy items on the extension cable in case of extrusion.
- Do not remove the housing of the device as opening or removing the housing may expose you to dangerous voltage or other hazards.
- Install the device in a place with fine ventilation to avoid damage caused by overheat.
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills onto the housing, unplug the module immediately.
- Do not twist or pull by force ends of the cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period.
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.

Introduction

Overview

This device is an HDBT 3.0 extender based on the new generation of the HDBT 3.0 platform, which can transmit the uncompressed HDMI2.0 video signal up to 4K@60Hz 4:4:4 8-bit over 100m Cat 6a cable.

Features

- Transceiver design. It can be arbitrarily set as a transmitter or a receiver and can be switched at any time, making the installation easier.
- Uncompressed video. It transmits 4K@60Hz 4:4:4 8-bit signal without compression and supports any HDR format, including Dolby Vision and HDR10+.
- KVM. Supports USB 2.0 & analog audio pass-through with variable direction.
- HDMI loop-out. It supports local HDMI loop-out when it is set to transmitter mode.
- Audio de-embedding. Supports audio de-embedding at both ends.
- 1G/100Mbps network. Supports 1G/100M adaptive network transparent transmission.
- Multiple signal transmission support (e.g., IR, RS232).
- Two-way PoH. Supports two-way PoH function, only need to connect one power adapter at one end, making the installation more flexible.

Package Contents

- 1 x Transceiver
- 1 x DC 12V Power Adapter
- 1 x AC Power Cord (with EU Pins)
- 1 x IR Emitter
- 1 x Broadband IR Receiver (30kHz-50kHz)
- 2 x Phoenix Male Connectors (3.5mm, 3 Pins)
- 2 x Mounting Brackets (with Screws)

- 1 x User Manual

Specifications


Technical	
Video Input	Transmitter mode: 1 x HDMI Receiver mode: 1 x HDMI, 1 x HDBT
Input Video Signal	HDMI with 4K@60 YUV 4:4:4, HDCP 2.2
Video Output	Transmitter: 1 x HDMI, 1 x HDBT Receiver: 1 x HDMI
Output Video Signal	HDBT, HDMI
	4096 x 2160 ^{2,5,6,7,8} (YUV 4:4:4), 3840 x 2160 ^{2,5,8} (YUV 4:4:4),
	2560×1600 ⁸ , 2560×1440 ⁸ , 1920×1200 ⁸ , 1920×1080P ⁸ ,
	1680×1050 ⁸ , 1600×1200 ⁸ , 1600×900 ⁸ , 1440×900 ⁸ ,
	1366×768 ⁸ , 1360×768 ⁸ , 1280×1024 ⁸ , 1280×960 ⁸ ,
Input/Output Resolutions	1280×800 ⁸ , 1280×768 ⁸ , 1280×720 ⁸ , 1024×768 ⁸ ,
	800×600 ⁸
	1 = at 23.98 Hz, 2 = at 24 Hz, 3 = at 25 Hz, 4 = at 29.97 Hz, 5 = at
	30 Hz, 6 = at 50 Hz, 7 = at 59.94 Hz, 8 = at 60 Hz
Audio Input	1x analog audio (pass-through)
Audio Output	1x analog audio (pass-through) 1x analog audio (audio de-embedding)
Audio Format	<ul style="list-style-type: none"> · Audio In/Out: Stereo · HDMI In/Out: Fully supports audio formats in HDMI 2.0 specification, including PCM 2.0/5.1/7.1, Dolby TrueHD, Dolby Atmos, DTS-HD Master Audio, and DTS:X · HDBT: Same as HDMI In/Out
Maximum Pixel Clock	600MHz
Maximum Data Rate	18Gbps
USB Spec	USB 2.0 and backward compatible with USB 1.1/1.0

Technical	
Video Input	Transmitter mode: 1 x HDMI Receiver mode: 1 x HDMI, 1 x HDBT
Input Video Signal	HDMI with 4K@60 YUV 4:4:4, HDCP 2.2
Video Output	Transmitter: 1 x HDMI, 1 x HDBT Receiver: 1 x HDMI
Output Video Signal	HDBT, HDMI
	4096 x 2160 ^{2,5,6,7,8} (YUV 4:4:4), 3840 x 2160 ^{2,5,8} (YUV 4:4:4),
	2560×1600 ⁸ , 2560×1440 ⁸ , 1920×1200 ⁸ , 1920×1080P ⁸ ,
	1680×1050 ⁸ , 1600×1200 ⁸ , 1600×900 ⁸ , 1440×900 ⁸ ,
	1366×768 ⁸ , 1360×768 ⁸ , 1280×1024 ⁸ , 1280×960 ⁸ ,
Input/Output Resolutions	1280×800 ⁸ , 1280×768 ⁸ , 1280×720 ⁸ , 1024×768 ⁸ ,
	800×600 ⁸
	1 = at 23.98 Hz, 2 = at 24 Hz, 3 = at 25 Hz, 4 = at 29.97 Hz, 5 = at
	30 Hz, 6 = at 50 Hz, 7 = at 59.94 Hz, 8 = at 60 Hz
Audio Input	1x analog audio (pass-through)
Audio Output	1x analog audio (pass-through) 1x analog audio (audio de-embedding)
Audio Format	<ul style="list-style-type: none"> · Audio In/Out: Stereo · HDMI In/Out: Fully supports audio formats in HDMI 2.0 specification, including PCM 2.0/5.1/7.1, Dolby TrueHD, Dolby Atmos, DTS-HD Master Audio, and DTS:X · HDBT: Same as HDMI In/Out
Maximum Pixel Clock	600MHz
Maximum Data Rate	18Gbps
USB Spec	USB 2.0 and backward compatible with USB 1.1/1.0

Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	10% to 90%, non-condensing
ESD Protection	Human-body Model: ±8kV (Air-gap discharge)/ ±4kV (Contact discharge)
Power Supply	DC12V 3A
Power Consumption (Max)	18.96W
Device Dimension (W x H x D)	215mm x 25mm x 120mm/8.46" x 0.98" x 4.72"
Product Net Weight	0.60kg/1.32lbs

Panel Descriptions


Front Panel

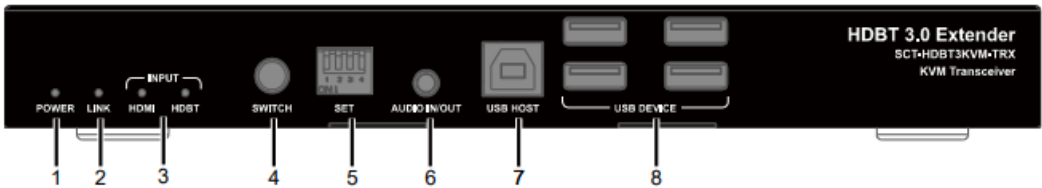

ID	Name	Description
1	Power LED	On: The device is powered on. Off: The device is powered off.
2	Link LED	On: The HDBT ports between this device and another transceiver are connected. Off: The HDBT ports between this device and another transceiver are not connected.
3	Input	HDMI LED On: The HDMI In is selected as the input video source. HDBT LED On: The HDBT is selected as the input video source. Note: These two LED indicators indicate the input

4	Switch	Press this button to select the input video source between HDMI In and HDBT In for the receiver.
5	Set	4-Pin DIP Switch for settings of transceiver's working mode (transmitter/receiver), USB mode (USB Host/USB Device), Audio In/Out, and RS-232 working mode (RS232 pass-through, API control or firmware update). For more information, see “DIP Switch Settings” section.
6	Audio In/Out	This port can be configured as Audio Input or Audio Output port. For more information, see the “DIP Switch Settings” section.
7	USB Host	USB 2.0 Type-B port. Connect to a USB host device (e.g., PC).
8	USB Device	USB 2.0 Type-A port. Connect to USB slave devices (e.g., keyboard, mouse, etc.).

Rear Panel

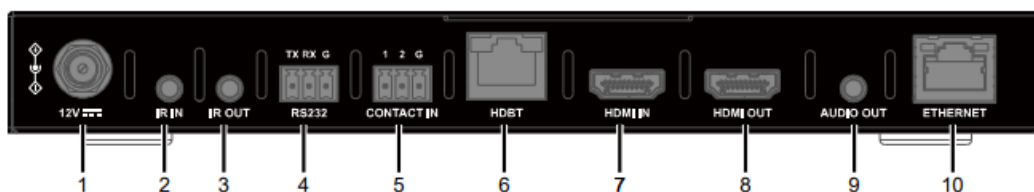

ID	Name	Description
1	DC 12V	Connect to the power adapter provided.
2	IR In	Connect to the IR receiver provided.
3	IR Out	Connect to the IR emitter provided.
4	RS232	Connect to an RS232 device for bi-directional RS232 pass-through, API control, or firmware upgrade. The default baudrate of this port is 115200.
5	Contact In	Connect to a keypad or push the button to select the input video source between HDMI In and HDBT In for the receiver.
6	HDBT	Connect to another transceiver for HDBT transmission.
7	HDMI In	Connect to an HDMI source device.
8	HDMI Out	Connect to an HDMI display device.
9	Audio Out	Connect to an audio receiver (e.g., speaker) for audio de-embedding output. Note: The AUDIO OUT port can only output audio when the device is connected to a display via HDMI OUT port. For example, when the device is configured as a transmitter, it is necessary to connect to a display
		via local HDMI OUT, and then the AUDIO OUT port can output audio.
10	Ethernet	Connect either side to the wireless router for Ethernet pass-through.

Installation and Wiring


Installation

Warnings:


- Before wiring, disconnect the power from the device.
- During wiring, connect and disconnect the cables gently.

To install the device in a suitable location, perform the following:

1. Remove the two screws on one side of the enclosure.

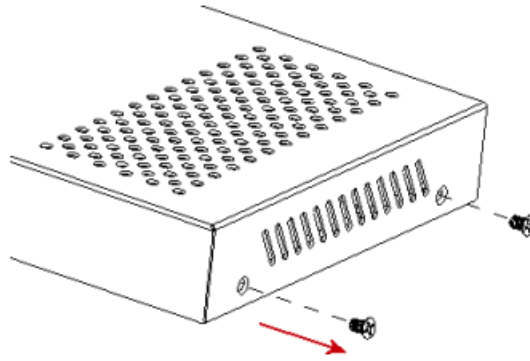


2. Attach the installation bracket to the enclosure using the screws provided. The bracket is attached to the enclosure as shown.

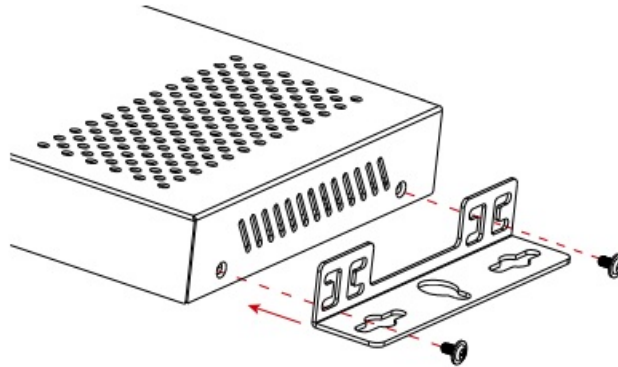

3. Repeat steps 1-2 for the other side of the device.
4. Attach the brackets to the surface you want to hold the device against using the screws (not included).

Wiring

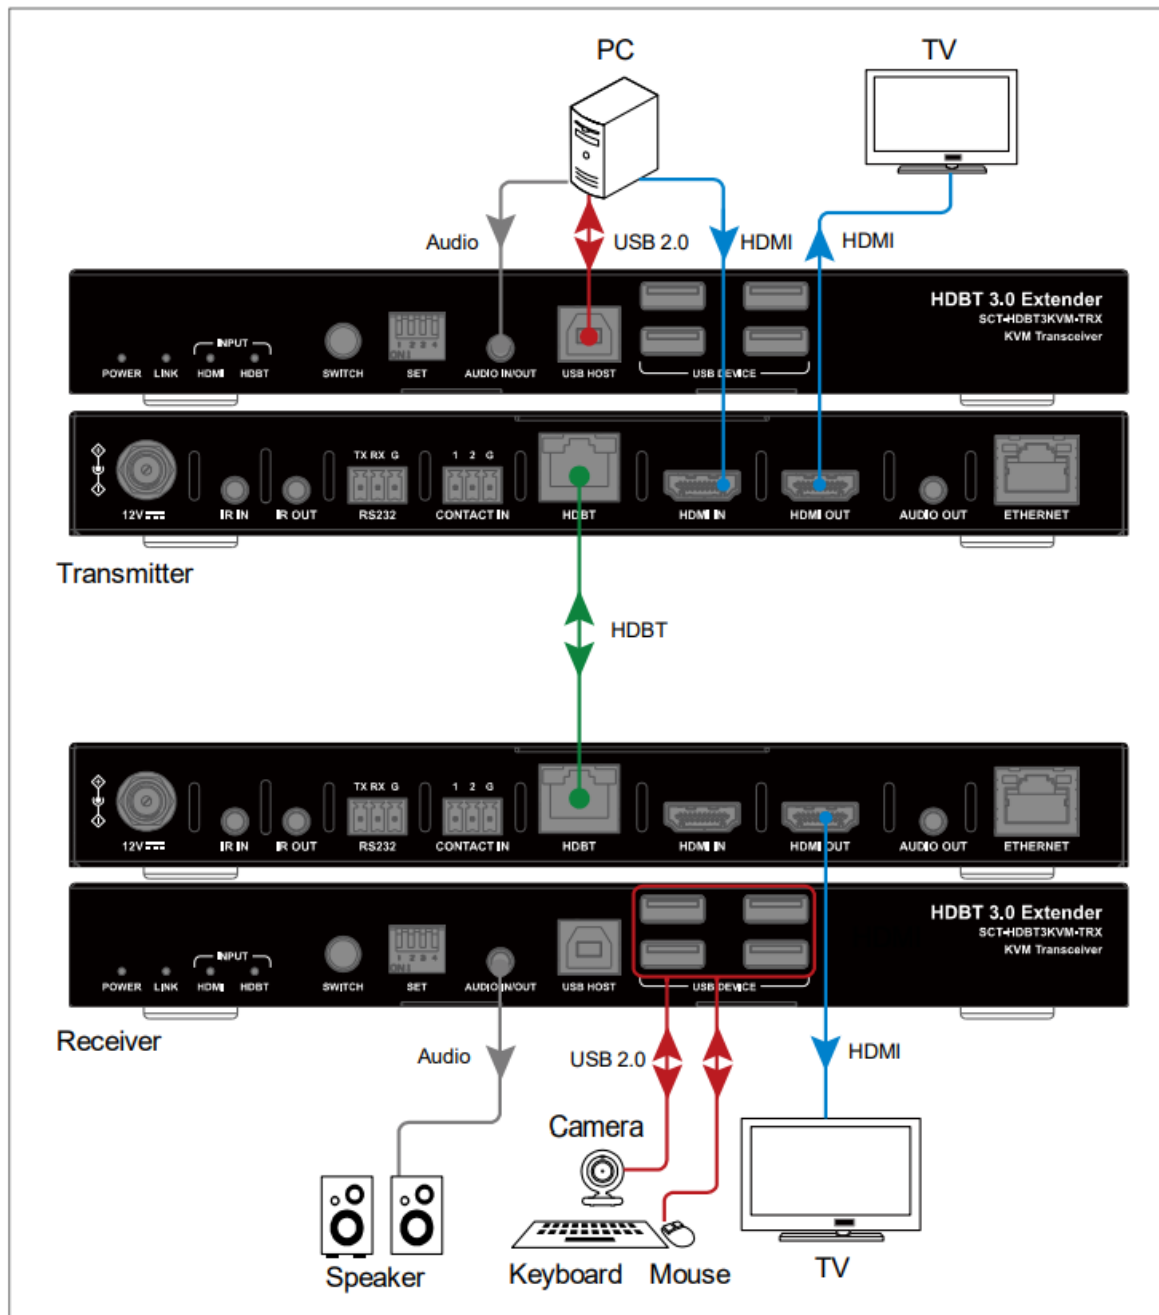

DIP Switch Settings

This device equips a 4-pin DIP switch for settings of working mode (transmitter/receiver), USB mode (USB Host/USB Device), Audio In/Out, and RS-232 working mode (RS232 pass-through, API control, or firmware update).

By default, all four switches are set in (up, up, up, up) positions.



The following table shows how the DIP Switch functions:

DIP Position				Function
1	2	3	4	
up				Set as Transmitter
down				Set as Receiver
	up			Set as USB Host and Audio In (analog audio pass-through)
	down			Set as USB Device and Audio Out (analog audio pass-through)
		up	up	RS232 pass-through
		down	up	RS232 for API and MCU update
		up	down	RS232 for HDBT update
		down	down	Reserved

Customer Service

The return of a product to our Customer Service implies the full agreement of the terms and conditions hereinafter. Their terms and conditions may be changed without prior notice.

Warranty

The limited warranty period of the product is fixed for three years.

Scope

These terms and conditions of Customer Service apply to the customer service provided for the products or any other items sold by authorized distributors only.

Warranty Exclusion:

- Warranty expiration.
- Factory applied serial number has been altered or removed from the product.
- Damage, deterioration, or malfunction caused by:
 - Normal wear and tear.
 - Use of supplies or parts not meeting our specifications.
 - No certificate or invoice as proof of warranty.
 - The product model shown on the warranty card does not match with the model of the product for repair or has been altered.
 - Damage caused by force majeure.
 - Servicing is not authorized by the distributor.
 - Any other causes which do not relate to a product defect.
- Shipping fees, installation, or labor charges for installation or setup of the product.

Documentation:

Customer Service will accept defective product(s) in the scope of warranty coverage at the sole condition that the defeat has been clearly defined, and upon reception of the documents or copy of the invoice, indicating the date of

purchase, the type of product, the serial number, and the name of the distributor. Remarks: Please contact your local distributor for further assistance or

MORE INFORMATION

- **ADDRESS:** syscomtec Distribution AG Raiffeisenallee 8 D-82041 Oberhaching (bei München)
- **Tel.:** +49 89 666 109 330
- Email: post@syscomtec.com
- <https://www.syscomtec.com>

FAQ

- **Q: Can I use this transceiver with any HDMI source?**
 - A: The HDBT 3.0 KVM Transceiver is compatible with HDMI2.0 sources up to 4K@60Hz 4:4:4 8-bit over a Cat 6a cable.
- **Q: How do I switch between transmitter and receiver modes?**
 - A: The transceiver can be set as a transmitter or receiver and switched at any time for flexible installation. Refer to the user manual for instructions on switching modes.

Documents / Resources

	<p>syscomtec SCT-HDBT3KVM-TRX HDBT 3.0 KVM Transceiver [pdf] User Manual SCT-HDBT3KVM-TRX, SCT-HDBT3KVM-TRX HDBT 3.0 KVM Transceiver, SCT-HDBT3KVM-T RX KVM Transceiver, HDBT 3.0 KVM Transceiver, HDBT KVM Transceiver, 3.0 KVM Transceiver, KVM Transceiver, KVM, Transceiver</p>
---	---

References

- [Digital Signage Lösungen | Signalmanagement und Signalübertragung](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.