

[Manuals.plus](#) /

› [Enbol](#) /

› Enbol O2215 Drop-in Bathroom Sink Instruction Manual

Enbol O2215

Enbol O2215 Drop-in Bathroom Sink Instruction Manual

Model: O2215 (21.6" x 15.4")

1. PRODUCT OVERVIEW

The Enbol O2215 is a rectangular ceramic drop-in bathroom sink designed for countertop installation. It features a premium vitreous china construction with a smooth, glazed finish and an integrated overflow.



Image 1.1: Enbol O2215 drop-in bathroom sink.

Key Features:

- **Durable Construction:** Made from premium vitreous china, double-glazed for a smooth and long-lasting finish.
- **Easy to Clean:** Non-porous ceramic surface resists stains and scratches, simplifying maintenance.
- **Standard Drain Opening:** Features an American standard 1.75-inch drain opening for compatibility with various faucets.
- **Integrated Overflow:** Prevents water from overflowing the sink basin.

SUPERIOR QUALITY



Premium smooth Glaze

Classic rectangular shape with curved

Sturdy & Durable

Large 22" Bowl For Your Bath



Heat Resistant



Chip Resistant



Corrosion Resistant



Scratch Resistant



Discoloration Resistant



NON-POROUS SURFACE,
SCRATCH, SPLASHING
PROOF

Strong Surface

Advanced Surface Finish. Highly Resistant To Chipping, Scratch, Corrosion and Discoloration. Designed For Faster Drainage.

Image 1.2: Superior quality features of the Enbol O2215 sink.

2. SAFETY INFORMATION

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in property damage or injury.

- Always wear appropriate personal protective equipment (PPE) such as safety glasses and gloves during installation.
- Ensure all water supply lines are turned off before beginning any plumbing work.
- Handle the ceramic sink with care to prevent chipping or breakage.
- Verify that the countertop material can support the weight of the sink and water.
- Consult a qualified plumber if you are unsure about any installation steps.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation.


- Enbol O2215 Ceramic Drop-in Bathroom Sink
- Cutout Template
- Installation Manual (this document)

4. SPECIFICATIONS

| Feature | Specification |
|--------------------------------|--|
| Brand | Enbol |
| Model Number | O2215 |
| Color | White |
| Material | Ceramic |
| Overall Dimensions (L x W x H) | 21 5/8" x 15 3/8" x 7 1/4" (549mm x 390mm x 184mm) |
| Bowl Size (L x W) | 17 3/4" x 11 3/4" (450mm x 298mm) |
| Drain Opening | American Standard 1.75 inches |
| Installation Type | Drop-in (Top Mount) |
| Shape | Rectangular |
| Item Weight | 20.2 Pounds |

Note: All dimensions are nominal; minor variations may occur due to manufacturing processes.

SINK SIZE

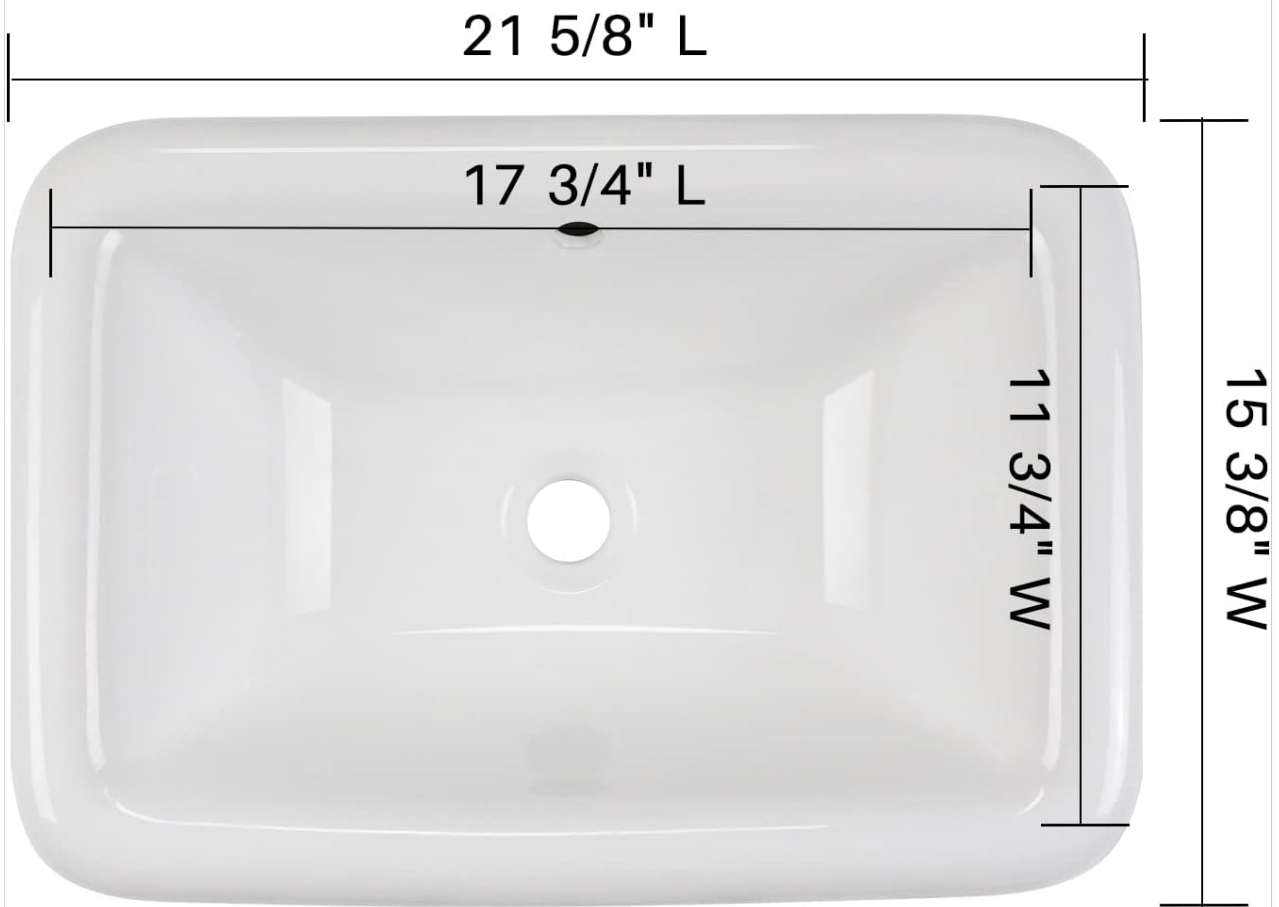

EXTERNAL DIMENSIONS : 21 5/8" L X 15 3/8" W

INTERNAL DIMENSIONS : 17 3/4" L X 11 3/4" W

Image 4.1: External and internal dimensions of the sink.

5. INSTALLATION

This section provides general guidelines for installing the Enbol O2215 drop-in sink. Always refer to the included cutout template for precise measurements and follow local plumbing codes.

Required Tools (Not Included):


- Safety glasses and gloves
- Measuring tape
- Pencil or marker
- Jigsaw or appropriate cutting tool for countertop material
- Silicone sealant (plumber's putty)
- Adjustable wrench

- Screwdriver

Installation Steps:

1. **Prepare Countertop:** Place the provided cutout template on the desired sink location on your countertop. Ensure proper clearance from walls and faucet holes. Trace the outline of the template onto the countertop.
2. **Cut Opening:** Carefully cut the opening in the countertop using a jigsaw or suitable cutting tool, following the traced line. Ensure the edges are smooth.
3. **Dry Fit:** Place the sink into the cutout to ensure a proper fit. Make any necessary adjustments to the opening.
4. **Apply Sealant:** Apply a bead of silicone sealant around the perimeter of the cutout opening on the countertop.
5. **Install Sink:** Carefully lower the sink into the opening, pressing firmly to create a seal with the sealant. Wipe away any excess sealant immediately.
6. **Connect Drain:** Install the drain assembly (not included) according to its manufacturer's instructions. Connect the P-trap and drain lines.
7. **Install Faucet:** Install your chosen faucet (not included) into the designated faucet holes on the countertop or wall, following its manufacturer's instructions. Connect water supply lines.
8. **Test for Leaks:** Turn on the water supply and check all connections for leaks. Tighten as necessary.

REFERENCE CUTOUT SIZE:

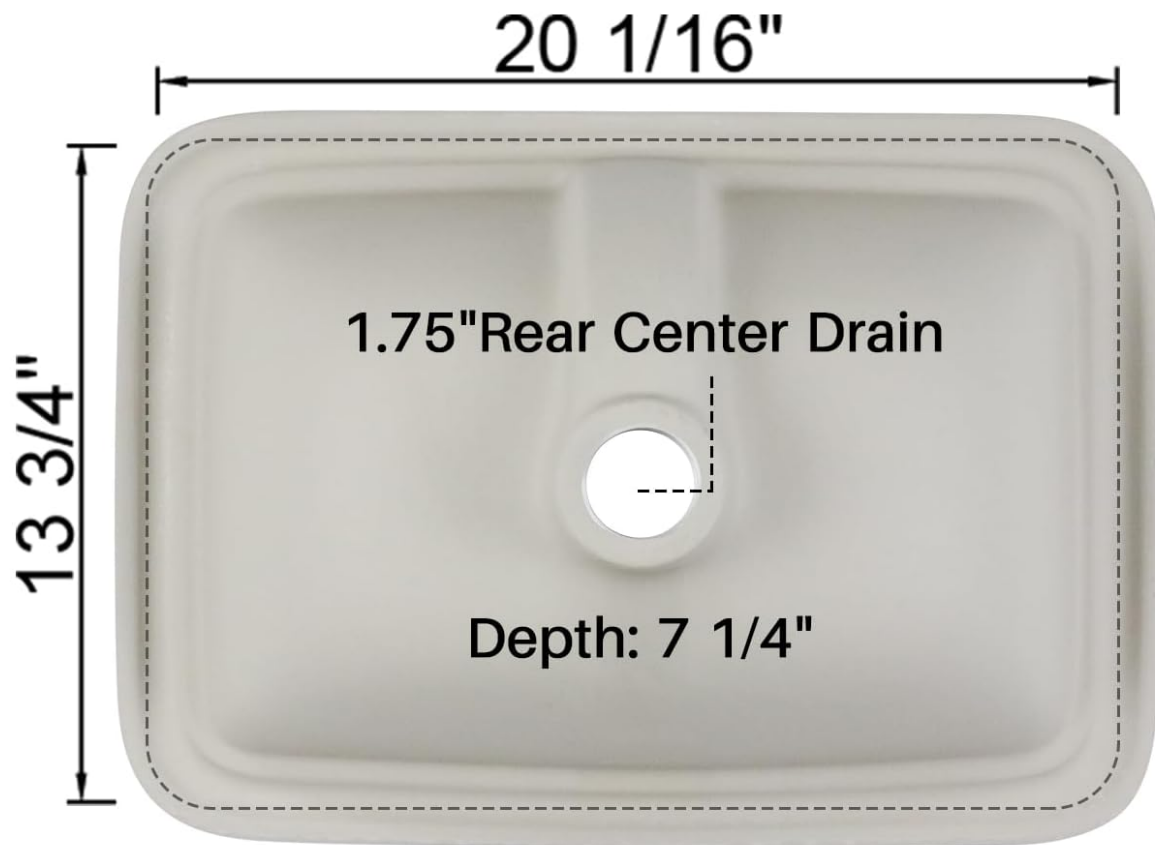

Because of manual measurement, a slight variation from the exact size is always allowed.

Please checked against actual sink to determine correct fit.

Image 5.1: Reference cutout dimensions for installation.

Your browser does not support the video tag.

Video 5.1: Official Enbol video demonstrating the features and design of the drop-in bathroom sink.

6. OPERATION

The Enbol O2215 sink functions as a standard bathroom basin. Water flows from the faucet into the bowl and drains through the 1.75-inch drain opening. The integrated overflow helps manage water levels and prevents accidental spills if the main drain is blocked.

EASY TO DRAIN

Sloped bottom design makes drainage more convenient and quick.



DOUBLE-LAYER

Double-layer rectangular undermount utility sink has more texture, with overflow hole inside, which makes the drainage more clean and fast, and prevents the water from overflowing the table when unattended.

Image 6.1: Sloped bottom design for efficient drainage.

7. MAINTENANCE AND CARE

Proper care will ensure the longevity and appearance of your Enbol ceramic sink.

- **Regular Cleaning:** Clean the sink regularly with a soft cloth or sponge and mild soap or a non-abrasive bathroom cleaner.
- **Avoid Abrasives:** Do not use abrasive cleaners, scouring pads, or harsh chemicals (e.g., strong acids, bleach) as these can damage the ceramic glaze.
- **Rinse Thoroughly:** After cleaning, rinse the sink thoroughly with clean water to remove all cleaning product residue.
- **Prevent Stains:** Wipe away any spills, especially those from cosmetics, hair dyes, or strong chemicals, immediately to prevent staining.
- **Hard Water Deposits:** For hard water stains, use a solution of vinegar and water, or a specialized hard water stain remover designed for ceramic surfaces.

8. TROUBLESHOOTING

This section addresses common issues you might encounter with your sink.

| Problem | Possible Cause | Solution |
|------------------------------|---|---|
| Slow Drainage | Clogged drain or P-trap. | Remove and clean the drain stopper. Inspect and clear the P-trap of any debris. |
| Water Leaks Around Drain | Improperly sealed drain assembly or loose connections. | Ensure plumber's putty or sealant is properly applied around the drain. Tighten all drain connections. |
| Water Leaks Around Sink Edge | Insufficient or degraded silicone sealant. | Remove old sealant, clean the area, and reapply a fresh bead of silicone sealant around the sink's perimeter. |
| Chipping or Cracks | Impact from heavy objects or extreme temperature changes. | Ceramic damage is typically not repairable. Consider replacement if damage affects functionality or aesthetics. |

9. WARRANTY AND SUPPORT

Enbol products are manufactured to high-quality standards. For specific warranty details, please refer to the warranty card included with your purchase or visit the official Enbol website. If you encounter any issues or require technical assistance, please contact Enbol customer support.

Contact Information: Refer to your purchase documentation or the Enbol brand website for the most current support contact details.