

Tektronix
Tektronix
MDO3000
Passive Probe



Tektronix MDO3000 Passive Probe Instruction Manual

[Home](#) » [Tektronix](#) » Tektronix MDO3000 Passive Probe Instruction Manual 

Contents

- [1 Tektronix MDO3000 Passive Probe](#)
- [2 Product Usage Instructions](#)
- [3 Operating Information](#)
- [4 Standard Accessories](#)
- [5 Specifications](#)
- [6 Characteristics Description](#)
- [7 Safety Summary](#)
- [8 Warranty Information](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

Tektronix®

Tektronix MDO3000 Passive Probe



Product Specifications

- Model: TPP1000
- Bandwidth: 1 GHz
- Attenuation: 10X
- Compatibility: Tektronix MDO3000, MDO/MSO/DPO4000B & MSO/DPO5000 series oscilloscopes
- Rating: 300 V CAT II

Product Usage Instructions

For MSO/DPO5000 instruments

1. Select Vertical > Probe Cal...
2. Select the tab of the channel for the connected probe.
3. In the Calibration section, click Calibrate Probe.

For MDO3000 and MDO/MSO/DPO4000B instruments:

Follow the specific calibration instructions provided for these models.

Changing Probe Tips

To change probe tips, follow these steps:

1. Unscrew the insulator sleeve to replace the probe tips.
2. Choose from the available Tektronix part numbers for different tip options.

Frequently Asked Questions (FAQ):

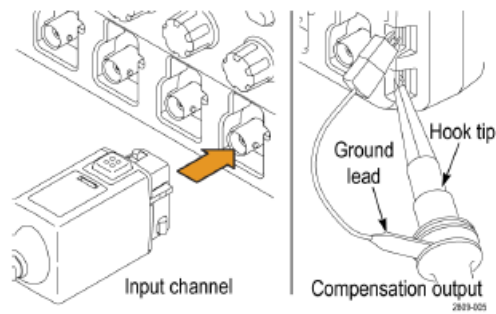
Q: How do I prevent electric shock when using the probe?

A: To avoid electric shock, ensure that fingers are kept behind the finger guard of the probe body and accessories at all times.

Operating Information

The TPP1000 10X Passive Probe is a high impedance probe with 10X attenuation that is designed for use with Tektronix MDO3000, MDO/MSO/DPO4000B & MSO/DPO5000 series ground-referenced oscilloscopes.

Connect the probe as shown in the illustrations below.



Compensating the Probe

You should compensate the probe after you attach it to an oscilloscope for the first time, or after you have changed the probe tip cartridge.

1. Connect the probe to an oscilloscope channel.
2. Connect the probe tip and ground to the probe compensation terminals on the oscilloscope.
3. On MSO/DPO5000 instruments:
 - Select Vertical > Probe Cal....
 - Select the tab of the channel for the connected probe.
 - In the Calibration section, click Calibrate Probe.
4. On MDO3000 and MDO/MSO/DPO4000B instruments:

Press the Channel Menu front panel button for the channel that you connected the probe to.

Push the More button until Probe Setup is selected.

Push the Calibrate Probe button and follow the on-screen instructions.

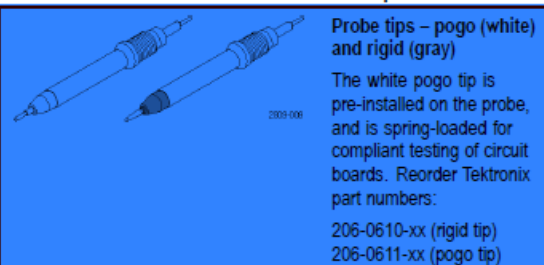
If the probe compensation fails, verify that the signal and ground connections are secure at the Probe Comp connections. Also check that the ground connection is secure at the probe head, the rigid or pogo tip is secured tightly in the probe head, and the hook tip is securely connected to the tip.

Standard Accessories

WARNING. To avoid electric shock when using the probe or accessories, keep fingers behind the finger guard of probe body and accessories.

Item

Description



Probe tips – pogo (white) and rigid (gray)

The white pogo tip is pre-installed on the probe, and is spring-loaded for compliant testing of circuit boards. Reorder Tektronix part numbers:


206-0610-xx (rigid tip)
206-0611-xx (pogo tip)



Insulator sleeve

Unscrew this sleeve to replace the probe tips. (See procedure on next page).

Reorder Tektronix part number 342-1194-xx




Hook tip

Press the hook tip onto the probe tip and then clamp the hook onto the circuit.

Rating: 300 V CAT II

Reorder Tektronix part number 013-0362-xx




Micro hook tip

Use this tip to access test points in tight spaces. Press the hook tip onto the probe tip and then extend the pincers around the circuit.

Rating: 300 V CAT II

Reorder Tektronix part number 013-0363-xx


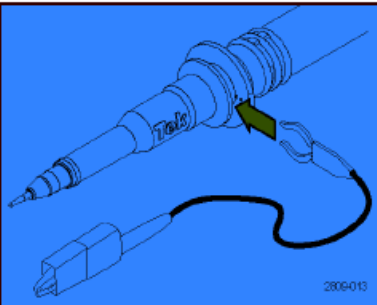



Universal IC cap

Use this cap to prevent shorting the probe tip between IC pins.








Press the cap on the probe tip until it snaps on, and then spin the cap to expose the probe tip toward the IC lead.

Reorder Tektronix part number 013-0366-xx

Item	Description
 <p>Do not use on circuits that exceed 30 V_{RMS}</p>	<p>Ground springs</p> <p>To limit aberrations on high frequency signals caused by ground path inductance, bend the spring to reach nearby ground connections (<0.75 in. long; <0.25 in. short). Reorder Tektronix part numbers:</p> <p>016-2028-xx (long, 2 ea.) 016-2034-xx (short, 2 ea.)</p>
	<p>Ground lead, with alligator clip</p> <p>Secure the lead to the probe head ground and then to your circuit ground.</p> <p>Reorder Tektronix part number 196-3521-xx</p>
	<p>Color bands</p> <p>Use these bands to identify the oscilloscope channel at the probe head.</p> <p>Reorder Tektronix part number 016-0633-xx (5 pairs)</p>

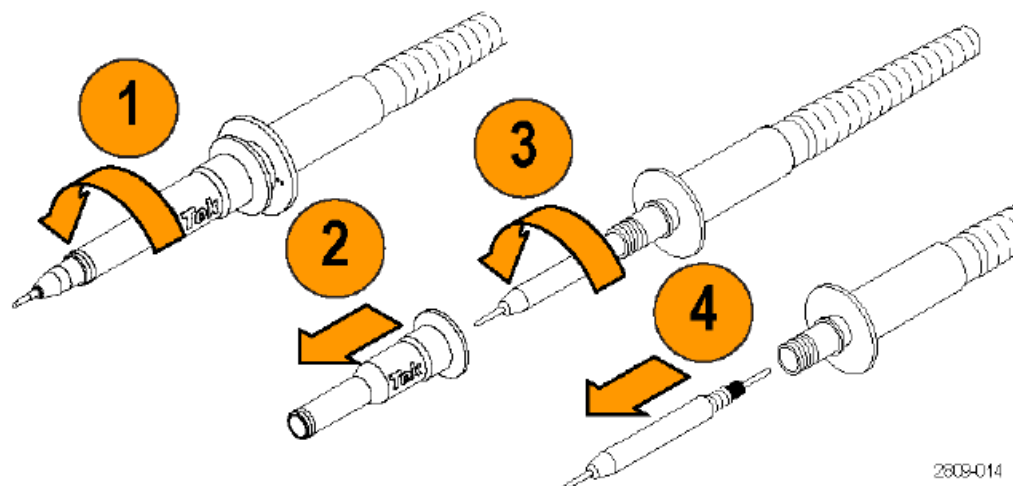
Optional Accessories

The accessories shown below are available for the probes and are rated ≤ 30 V unless indicated otherwise.

Accessory		Part number
MicroCKT Test Tip		206-0569-xx
BNC to Tip Adapter, Unterminated		013-0367-xx
Circuit Board Test Point/PCB Adapter		016-2016-xx
Chassis-Mount Probe Test Jack		131-4210-xx
6" Clip-on Ground Lead		196-3198-xx
12" Alligator Ground Lead		196-3512-xx
Wire, spool, 32 AWG		020-3045-xx

Interchanging the Probe Tip

WARNING. To reduce the risk of shock, disconnect the probe before changing the probe tips.



2609-014

For optimal performance, do a probe compensation after the tip has been replaced.

Specifications

Table1: Electrical and mechanical specifications

Characteristic	Specification
Bandwidth (–3 dB)	1 GHz
System rise time (typical)	<450 ps
System input capacitance	Rigid tip: 3.9 pF \pm 0.3 pF Pogo pin tip: 5.1 pF \pm 0.5 pF
System attenuation accuracy	10:1 \pm 2.2%
Probe series resistance @DC	9.75 M Ω \pm 0.5%
System input resistance @DC	10 M Ω \pm 2%
Propagation delay	~5.67 ns
Maximum input voltage	300 V _{RMS} CAT II
Cable length	1.3 m \pm 3 cm

Performance Graphs

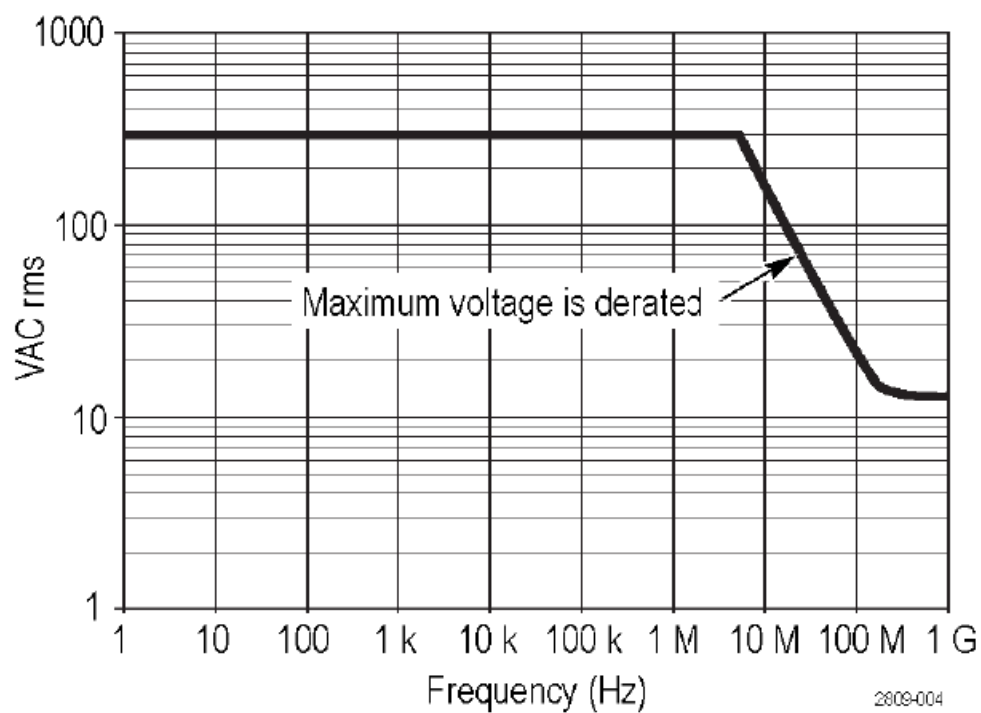
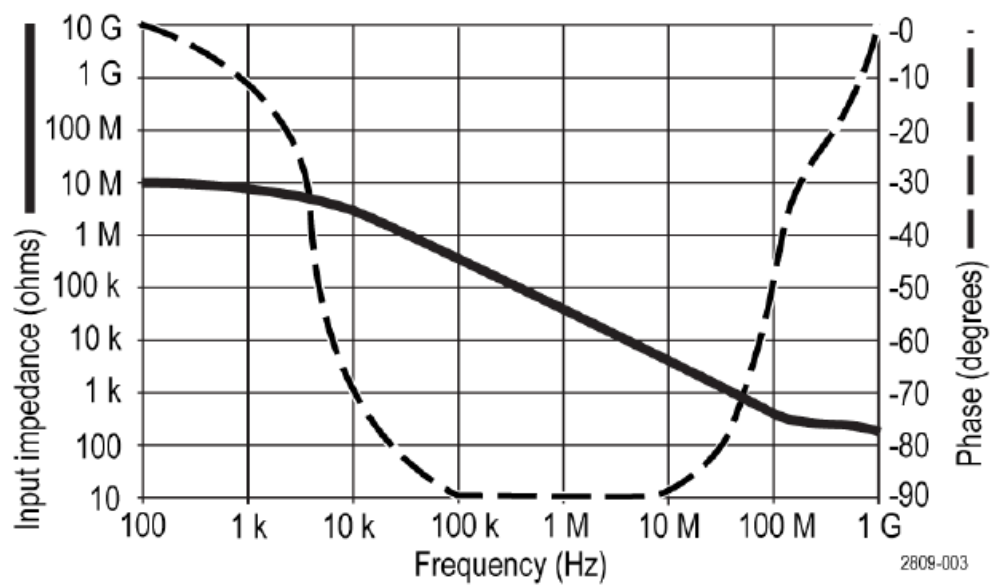



Table 2: Environmental specifications

Characteristics	Description
Temperature	
Operating	–15 °C to +65 °C (+5 °F to +149 °F)
Nonoperating	–62 °C to +85 °C (–80 °F to +185 °F)
Humidity	
Operating	5% to 95% relative humidity (%RH) up to +30 °C, 5% to 75% RH above +30 °C up to +65 °C. Noncondensing
Nonoperating	5% to 45% RH above +65 °C up to +85 °C. Noncondensing
Altitude	
Operating	3.0 km (9,842 ft) maximum
Nonoperating	12.2 km (40,000 ft) maximum

Table 3: Certifications and compliances

Characteristics	Description
EC Declaration of Conformity	Compliance was demonstrated to the following specification as listed in the Official Journal of the European Communities: Low Voltage Directive 2006/95/EC: EN61010-031/A1: 2008
Measurement Category	CAT III: Distribution-level mains, fixed installation
Product Examples	CAT II: Local-level mains, appliances, portable equipment CAT I: Circuits not directly connected to mains.

Characteristics Description

Pollution Degree 2	Do not operate in environments where conductive pollutants may be present (as defined in IEC 61010-1). Rated for indoor use only.
Additional Safety Standards	UL61010-031;2010 CAN/CSA C22.2 No. 61010-031:07/A1:2010 IEC61010-031; IEC 61010-031/A1:2008
	Equipment Recycling. This product complies with the European Union's requirements according to Directive 2002/96/EC on waste electrical and electronic equipment (WEEE). For more information about recycling options, check the Support/Service section of the Tektronix Web site (www.tektronix.com).

Safety Summary

Review the following safety precautions to avoid injury and prevent damage to this product or any products connected to it. To avoid potential hazards, use this product only as specified. Using the probe or accessories in a manner not specified could result in a shock or fire hazard.

To Avoid Fire or Personal Injury

Ground-Referenced Oscilloscope Use. Do not float the reference lead of this probe when using with ground referenced oscilloscopes (for example, MDO, MSO, and DPO series oscilloscopes). The reference lead must be connected to earth potential (0 V).

Connect and Disconnect Properly. Connect the probe output to the measurement instrument before connecting the probe to the circuit under test. Disconnect the probe input and the probe reference lead from the circuit under test before disconnecting the probe from the measurement instrument.

- **Avoid Electric Shock.** To avoid injury or loss of life, do not connect or disconnect probes or test leads while they are connected to a voltage source.
- **Observe All Terminal Ratings.** To avoid fire or shock hazard, observe all ratings and markings on the product. Consult the product manual for further ratings information before making connections to the product.
- **Avoid Electric Shock.** When using probe accessories, never exceed the lowest rating of the probe or its accessory, whichever is less, including the measurement category and voltage rating.
- **Avoid Electric Overload.** To avoid injury or fire hazard, do not apply potential to any input, including the reference inputs, that varies from ground by more than the maximum rating for that input.
- **Avoid Exposed Circuitry and Do not Operate Without Covers.** Do not touch exposed connections and components when power is present.
- **Inspect The Probe And Accessories.** Before each use, inspect probe and accessories for damage (cuts, tears, defects in the probe body, accessories, cable jacket, etc.). Do not use if damaged.
- **Do Not Operate in Wet/Damp Conditions.**
- **Do Not Operate in an Explosive Atmosphere.**
- **Keep Product Surfaces Clean and Dry.**
- **Safety Terms and Symbols Terms in This Manual.**

These terms may appear in this manual

WARNING. Warning statements identify conditions or practices that could result in injury or loss of life.

CAUTION. Caution statements identify conditions or practices that could result in damage to this product or other property.

Symbols on the Product. These symbols may appear on the product


Contacting Tektronix

- Web site: www.tektronix.com
- Phone: 1-[800-833-9200](tel:800-833-9200)
- Address: Tektronix, Inc.
- Department or name (if known)
- 14200 SW Karl Braun Drive
- P.O. Box 500
- Beaverton, OR 97077 USA
- Email: techsupport@tektronix.com



Warranty Information

For warranty information, go to www.tektronix.com/warranty

Documents / Resources

	Tektronix MDO3000 Passive Probe [pdf] Instruction Manual MDO3000, MDO-MSO-DPO4000B, MSO-DPO5000, MDO3000 Passive Probe, MDO3000, Pas sive Probe, Probe
--	--

References

-  [Test and Measurement Equipment | Tektronix](#)
-  [Warranty Status Search | Tektronix](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.