

IMEX VCC009

IMEX VCC009 Clic-Clac PVC Valve User Manual

Model: VCC009

INTRODUCTION

Thank you for choosing the IMEX VCC009 Clic-Clac PVC Valve. This manual provides essential information for the proper installation, operation, and maintenance of your new valve. Please read these instructions carefully before installation and retain them for future reference.

The IMEX VCC009 is a chrome-finished Clic-Clac drain valve, designed for use in various plumbing installations. It features a durable PVC body and a convenient push-button stopper mechanism.

SAFETY INFORMATION

No specific safety warnings are provided for this product. Always follow general plumbing safety practices, including:

- Ensure water supply is turned off before beginning installation.
- Wear appropriate personal protective equipment (e.g., gloves, eye protection).
- If you are unsure about any installation steps, consult a qualified plumber.

SETUP AND INSTALLATION

This section outlines the general steps for installing the IMEX VCC009 Clic-Clac PVC Valve. Specific installation may vary based on your sink or basin type.

1. **Prepare the Drain Hole:** Ensure the drain hole in your sink or basin is clean and free of debris.
2. **Apply Sealant:** Apply a bead of plumber's putty or silicone sealant around the underside of the valve's top flange (the chrome part that sits inside the basin).
3. **Insert Valve:** Insert the top part of the valve through the drain hole from the inside of the basin.
4. **Secure from Below:** From underneath the basin, slide the rubber washer, then the plastic washer, and finally the locking nut onto the threaded body of the valve.
5. **Tighten:** Hand-tighten the locking nut, then use a wrench to gently tighten it further until the valve is secure.

and the sealant creates a watertight seal. Do not overtighten.

6. **Connect Waste Pipe:** Connect your waste pipe to the threaded outlet of the valve. Ensure all connections are tight and sealed.
7. **Test for Leaks:** Turn on the water supply and fill the basin. Check all connections for any signs of leaks.





Figure 1: The IMEX VCC009 Clic-Clac PVC Valve. This image shows the complete valve assembly, including the chrome stopper, the main body, and the threaded PVC base for connection to a waste pipe.

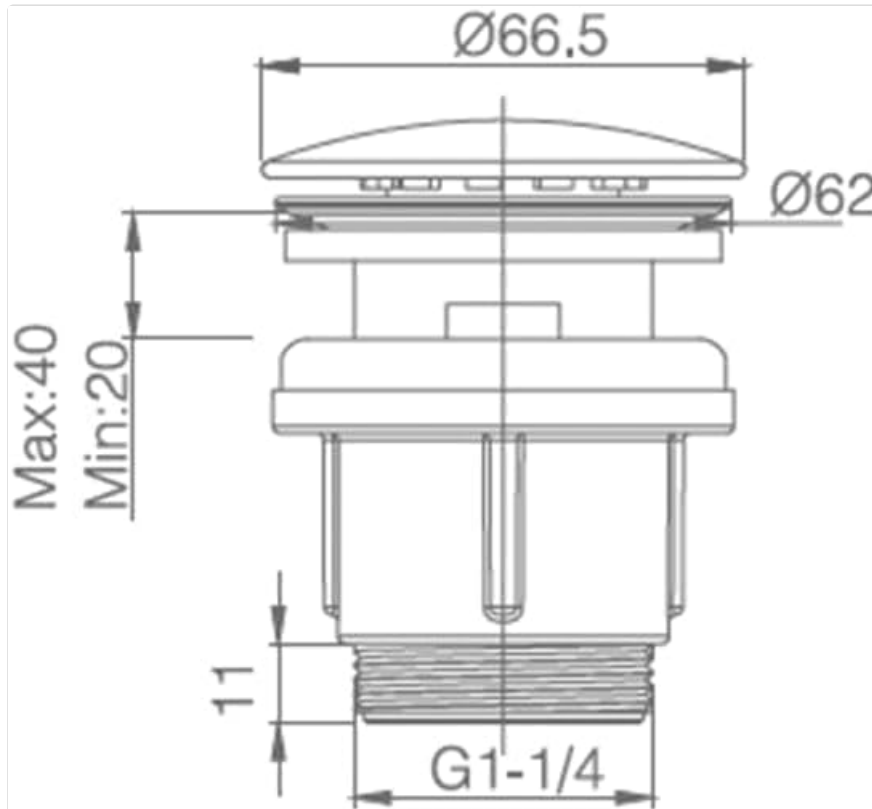


Figure 2: Dimensional drawing of the IMEX VCC009 Clic-Clac PVC Valve. This diagram illustrates key measurements such as the stopper diameter (Ø66.5), the main body diameter (Ø62), adjustable height (Max:40, Min:20), and the G1-1/4 inch thread size for the waste connection.

OPERATING INSTRUCTIONS

The IMEX VCC009 Clic-Clac Valve features a simple push-button mechanism for opening and closing the drain.

- **To Close the Drain:** Press down firmly on the chrome stopper. It will click into the closed position, sealing the drain.
- **To Open the Drain:** Press down firmly on the chrome stopper again. It will click into the open position, allowing water to drain.

MAINTENANCE

Regular maintenance will help ensure the longevity and proper function of your valve.

- **Cleaning the Chrome Finish:** Clean the chrome stopper and visible parts with a soft cloth and mild, non-abrasive cleaner. Avoid harsh chemicals or abrasive pads, which can damage the finish.
- **Cleaning the Stopper Mechanism:** Periodically remove the stopper (it usually unscrews or pulls out) to clean any hair or debris that may have accumulated underneath, which can affect drainage or the clic-clac

mechanism. Rinse with water and reinsert.

- **Check for Leaks:** Regularly inspect the connections underneath the basin for any signs of water leaks. Tighten connections if necessary.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Water leaking from connections	Loose connections or improperly seated seals.	Ensure all nuts are tightened properly. Check that washers and sealant are correctly positioned. Reapply sealant if necessary.
Stopper not opening/closing properly	Debris caught in the mechanism or worn mechanism.	Remove the stopper and clean any debris. If the mechanism is worn, replacement may be necessary.
Slow drainage	Accumulation of hair or debris under the stopper or in the drain pipe.	Remove the stopper and clean thoroughly. Use a drain cleaner if the blockage is further down the pipe.

SPECIFICATIONS

Brand: IMEX
Model Number: VCC009
Exterior Finish: Chrome
Material: PVC
Number of Ports: 1
Manufacturer Part Number: VCC009
Thread Size: G1-1/4 (as per dimensional drawing)

WARRANTY

The IMEX VCC009 Clic-Clac PVC Valve comes with a **5-year warranty**. Please retain your proof of purchase for any warranty claims. The warranty covers manufacturing defects under normal use and service. It does not cover damage resulting from improper installation, misuse, abuse, or normal wear and tear.

SUPPORT

For further assistance, technical support, or warranty claims, please contact your retailer or the manufacturer directly. When contacting support, please have your product model number (VCC009) and proof of purchase available.
You may find additional information on the official IMEX website or through your product's point of purchase.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question