



TOA M-82210-EB Remote Audio Input Output Panel User Guide

[Home](#) » [TOA](#) » TOA M-82210-EB Remote Audio Input Output Panel User Guide 

Contents

- [1 TOA M-82210-EB Remote Audio Input Output Panel](#)
- [2 DESCRIPTION](#)
- [3 SPECIFICATIONS](#)
- [4 APPEARANCE](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)



TOA M-82210-EB Remote Audio Input Output Panel




DESCRIPTION

Designed for exclusive use with the M-80800, the M-82210 Remote Audio Input Output Panel providing 2x analog IN and 2x analog OU1. The device includes built-in A/D and D/A converters processing digital audio AES3 signals from and to the M-8080D.

SPECIFICATIONS


Power Source	24V DC (Powered by M – 8080D or M – 804EXI)
Audio Input	MIC input : – 48 dBV, 5.1k Ω , electronic balanced , XLR Connector Line input A – B 0 dBV, 5.1k Ω , unbalanced, RCA pin jack
Audio Output	Line output 1 – 2 : 0 dBV, 1.8k Ω , Maximum output 20dBu (7.75V) , electronic balanced, screw terminal (3 pins x 2)
Frequency Response	20 – 20,000 Hz, ± 3 dB
Total Harmonic Distortion	0.01%
S/N Ratio	Over 105dB (A weighted)
Crosstalk	Over 79dB (A weighted)
Phantom Power	+48 VDC, switchable, MIC input
RD IN	Transmits and receives AES3 digital audio plus control data connect to M-8080D or M-804EX, RJ45 Connector
A/D Converter	24 bit
Sampling Frequency	48 kHz
Indicators	Input: Signal (Green) x 2, Peak (Red) x 2 Output: Signal (Green) x 2, Peak (Red) x 2
Operating Temperature	0°C to + 40°C (32°F to 104°F)
Operating Humidity	90% RH or less (no condensation)
Finish	Panel: Polycarbonate + ABS, white (RAL9016 or equivalent)
Dimensions	147 (W) x 86 (H) x 52 (D) mm (5.79" x 3.39" x 2.05")
Weight	0.3 kg
Accessory	Front cover - 1, Wall mounting screw (4 x 30) -4, Box mounting screw 14 x 20)4, Plastic anchor -4

APPEARANCE

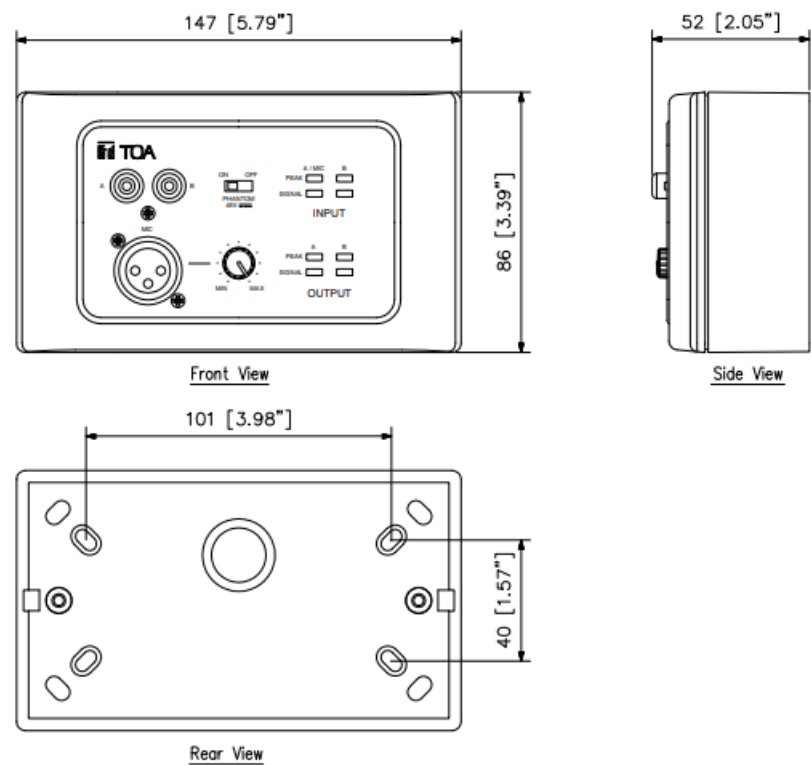

UNIT:mm SCALE:1/2

Documents / Resources

	TOA M-82210-EB Remote Audio Input Output Panel [pdf] User Guide M-82210-EB Remote Audio Input Output Panel, M-82210-EB, Remote Audio Input Output Panel, Remote Audio Panel, Audio Input Output Panel, Audio Panel, Input Output Panel, Input Panel, Output Panel
---	---