

- Manuals.plus /
- > [Siljoy](#) /
 - > Siljoy Modern Crystal Chandelier (5-Ring LED) Instruction Manual

Siljoy HLP168-234567

Siljoy Modern Crystal Chandelier (5-Ring LED) Instruction Manual

Model: HLP168-234567

- Introduction
- Safety Information
- Package Contents
- Installation
- Operation
- Maintenance
- Troubleshooting
- Specifications
- Warranty & Support

1. INTRODUCTION

Thank you for choosing the Siljoy Modern Crystal Chandelier. This 5-ring LED pendant light fixture is designed to provide elegant illumination and enhance the aesthetic of your living space. Featuring high-quality K9 crystals and adjustable LED lighting, this chandelier offers both functionality and sophisticated design. Please read this manual thoroughly before installation and use to ensure proper setup and safe operation.



Figure 1: The Siljoy 5-Ring Modern Crystal Chandelier.

2. SAFETY INFORMATION

WARNING: RISK OF ELECTRIC SHOCK. DISCONNECT POWER AT THE CIRCUIT BREAKER BEFORE INSTALLATION OR SERVICING.

- Always turn off the main power supply at the circuit breaker before beginning any electrical work.
- Installation should be performed by a qualified electrician or a person with adequate electrical knowledge.
- Ensure all wiring connections are secure and comply with local electrical codes.
- Do not install the fixture on a ceiling that cannot support its weight.
- Handle crystal components with care to prevent breakage.
- Do not modify the fixture or its components. Use only original replacement parts if needed.
- Keep children and pets away from the installation area.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation. If any parts are missing or damaged, please contact customer support.

- Ceiling Canopy (with pre-wired LED driver)
- 5 Crystal Rings (various sizes with integrated LED strips)
- Adjustable Suspension Cables
- Mounting Hardware (screws, wire nuts, anchors)
- Instruction Manual
- Gloves (for handling crystals)

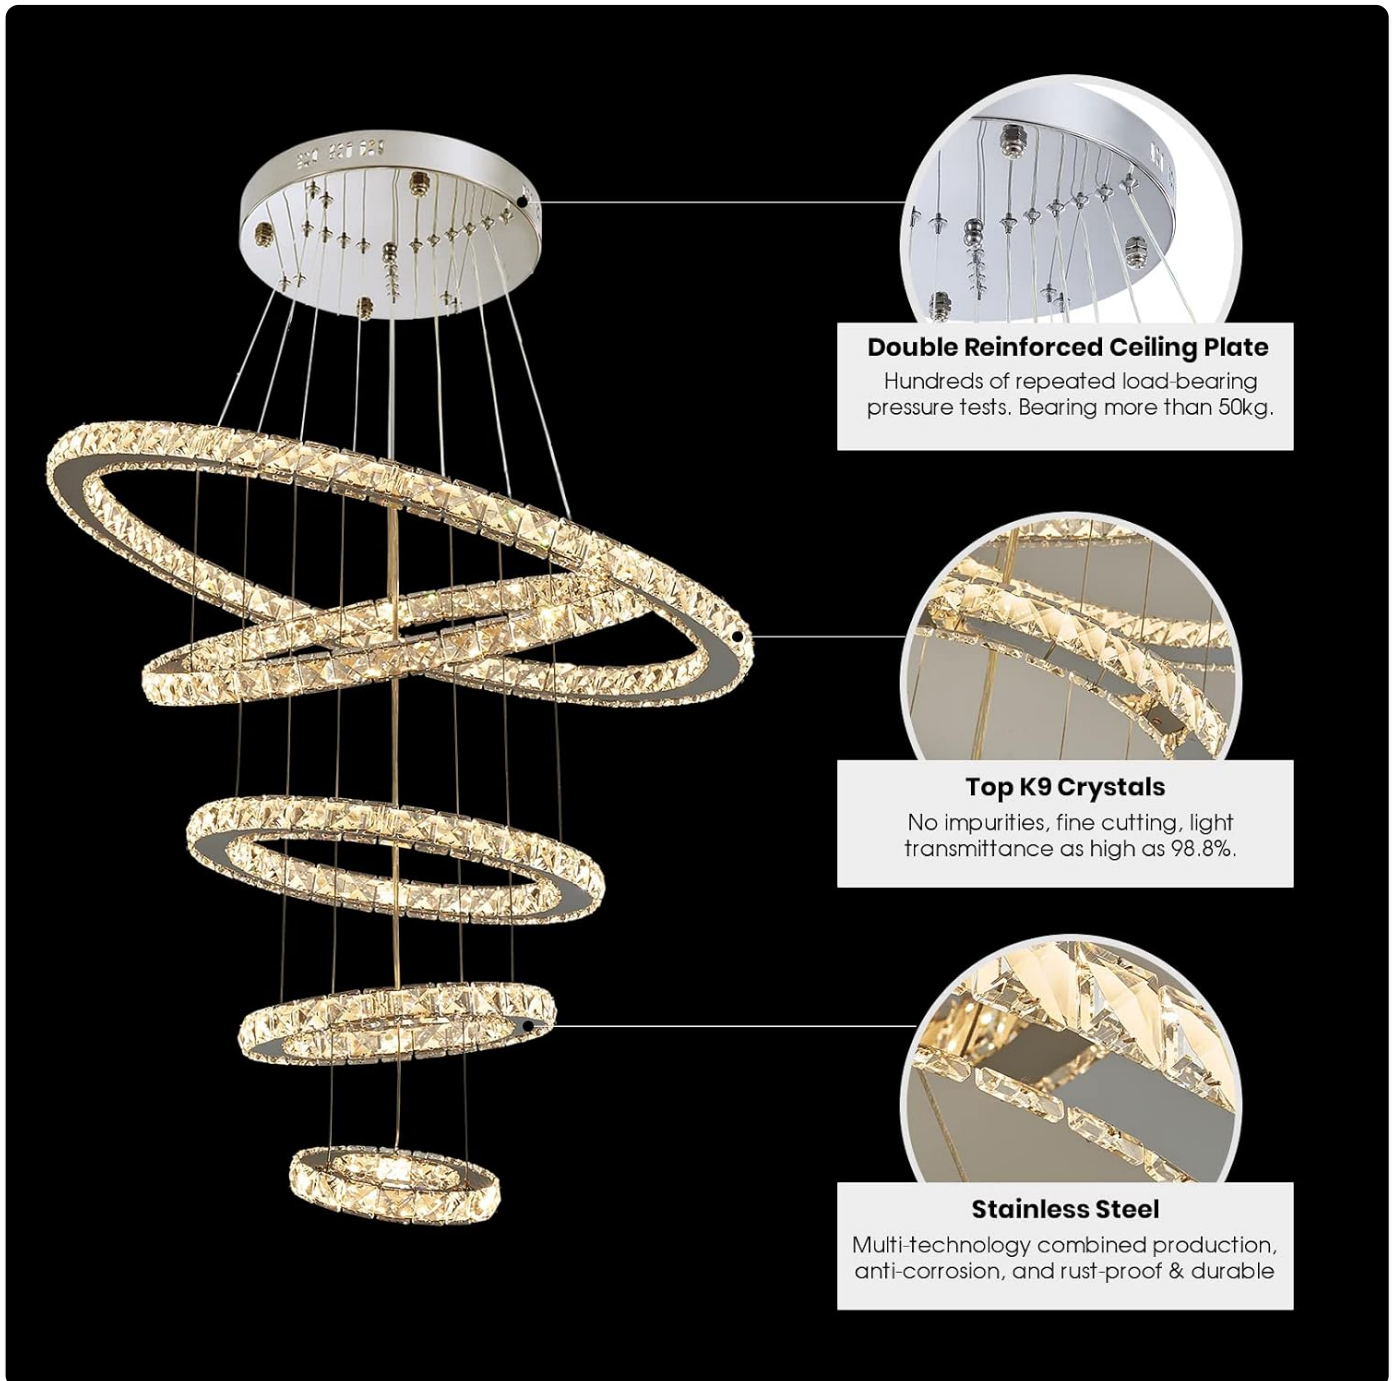


Figure 2: Detailed view of the chandelier's components, including the double-reinforced ceiling plate, K9 crystals, and stainless steel construction.

4. INSTALLATION

Professional installation is recommended. Ensure power is OFF at the circuit breaker before starting.

4.1 Pre-Installation

1. Unpack all components and inspect for damage.
2. Identify the desired hanging height and arrangement for the 5 rings.
3. Wear gloves when handling the crystal rings to avoid fingerprints.

4.2 Mounting the Ceiling Canopy

1. Locate the junction box in your ceiling.
2. Attach the mounting bracket (if separate) to the junction box using the provided screws.
3. Connect the household electrical wires to the chandelier's wires (Live to Live, Neutral to Neutral, Ground to Ground) using wire nuts.
4. Secure the ceiling canopy to the mounting bracket, ensuring all wires are tucked safely inside.

WIDE APPLICATION



Figure 3: Illustration of connecting the chandelier's electrical wires to the household wiring.

4.3 Adjusting Cable Length and Attaching Rings

1. Each crystal ring is suspended by multiple adjustable cables. To adjust the length of a cable, press the small pin on the cable gripper located on the ceiling canopy and slide the cable to the desired length. Release the pin to lock the cable in place.
2. Carefully attach each crystal ring to its corresponding suspension cables. Ensure the rings are level and securely fastened.
3. Arrange the rings in your preferred configuration. The cables allow for various creative designs.

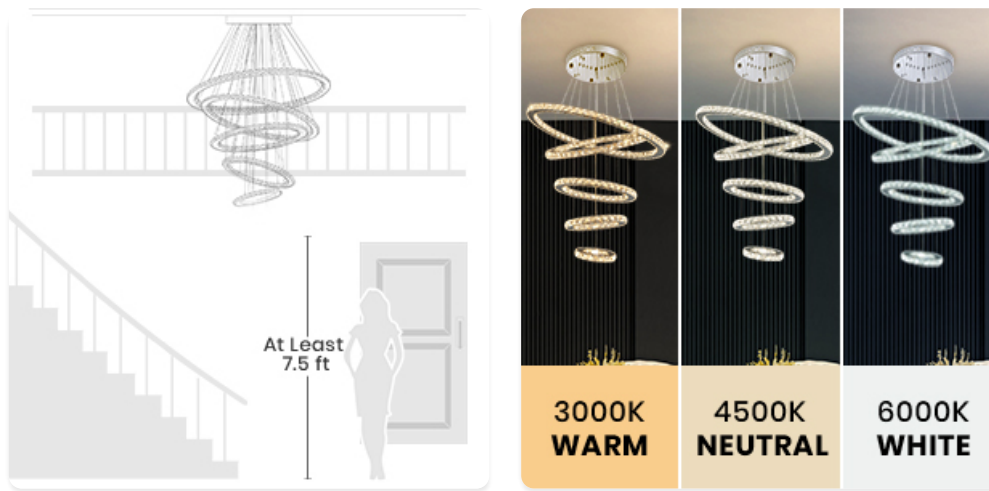


Figure 4: Details of the adjustable cable mechanism for customizing chandelier height and ring arrangement.

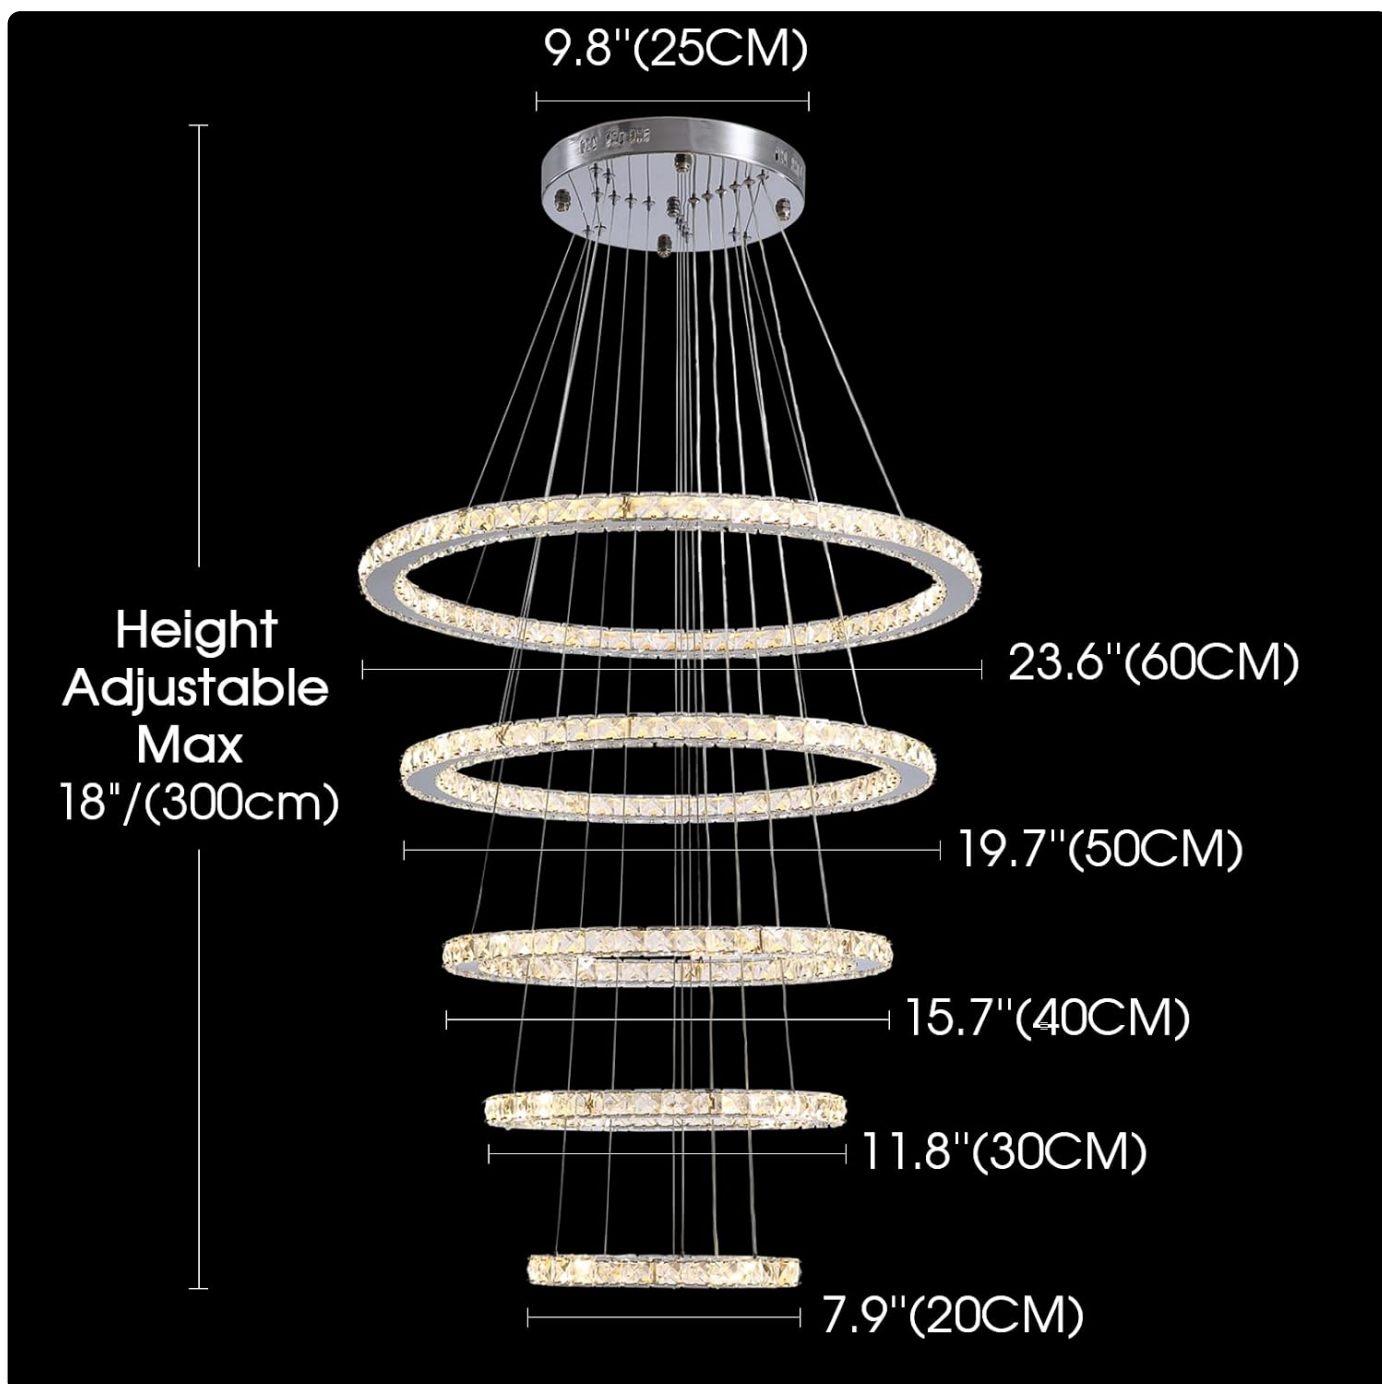


Figure 5: Chandelier dimensions and maximum adjustable cable length (118 inches / 300 cm).

5. OPERATION

The Siljoy Modern Crystal Chandelier features integrated LED lighting with adjustable color temperature and a memory function.

5.1 Turning On/Off and Color Temperature Adjustment

The chandelier is controlled by a standard wall switch. Each toggle of the switch will cycle through the available color temperatures:

1. **First Toggle:** Warm White (3000K)
2. **Second Toggle:** Neutral White (4500K)
3. **Third Toggle:** Cool White (6000K)
4. **Fourth Toggle:** Off

The fixture has a memory function, which will restore the last selected color temperature when restarted, even after a power interruption.

DIMMABLE LIGHT, FREE TO CHANGE YOUR HOME ATMOSPHERE AT WILL

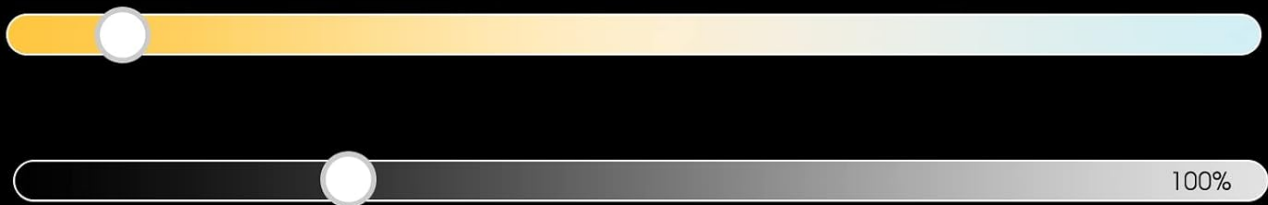


Figure 6: The chandelier's 3-color temperature adjustment feature.

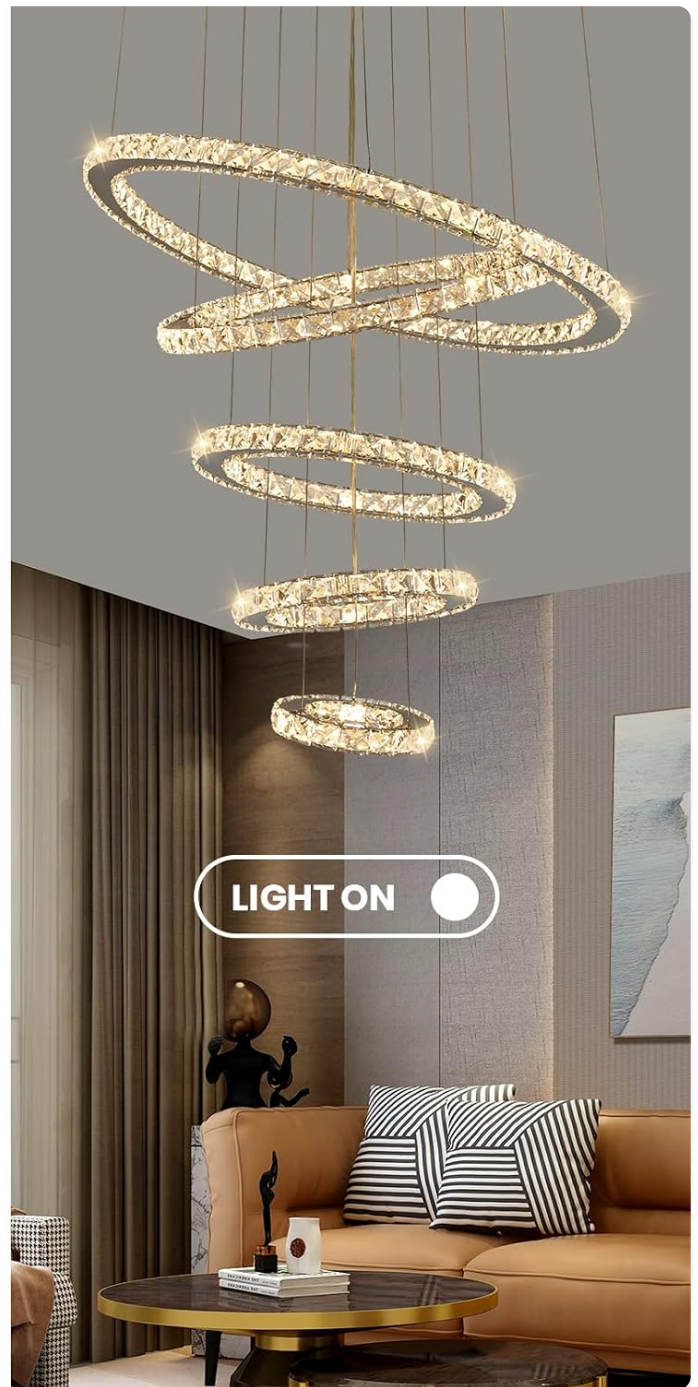
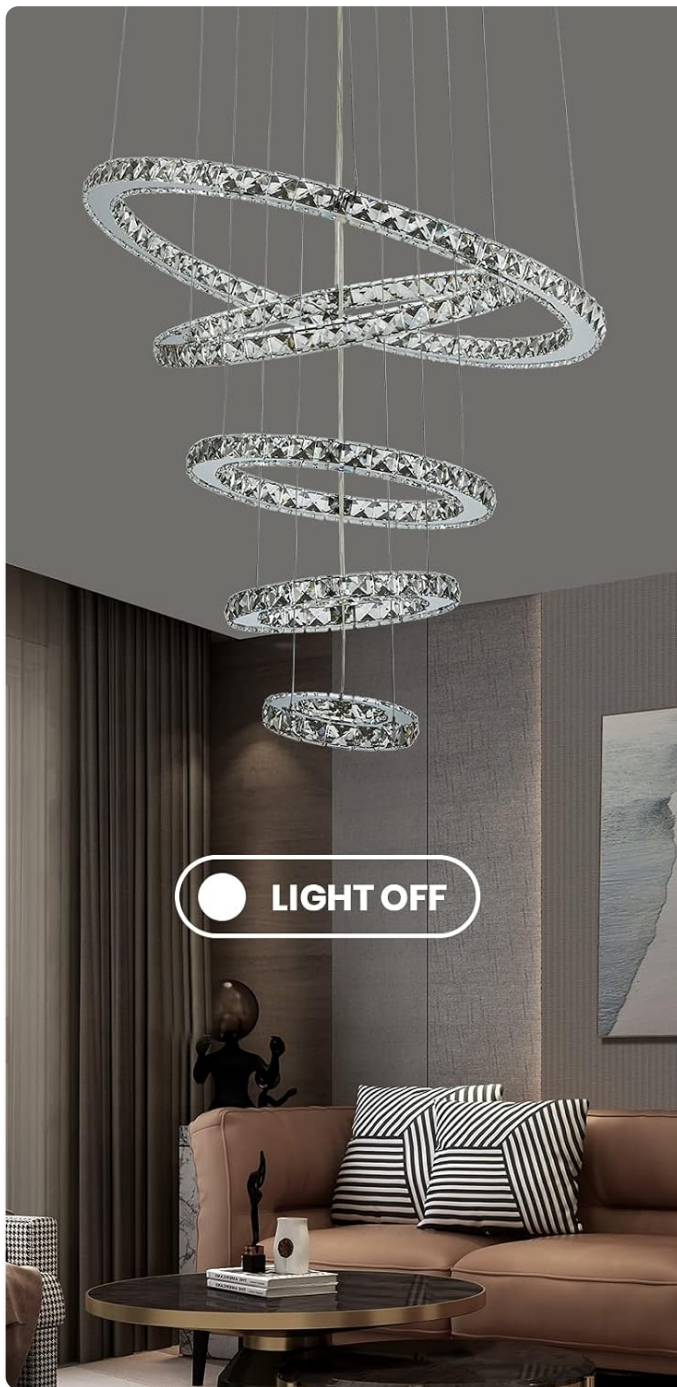


Figure 7: Chandelier in 'Light Off' and 'Light On' states.

6. MAINTENANCE

Regular cleaning will help maintain the chandelier's appearance and performance.

6.1 Cleaning

1. Ensure the power is turned off at the circuit breaker before cleaning.
2. Use a soft, lint-free cloth to gently wipe the metal frame and crystal components.
3. For stubborn dirt on crystals, a mild glass cleaner can be sprayed onto the cloth (not directly onto the crystals or electrical components) and then wiped clean.
4. Avoid abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or crystals.
5. Do not immerse any part of the fixture in water.

7. TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; faulty LED driver.	Check circuit breaker. Ensure all wiring connections are secure. If problem persists, contact a qualified electrician or customer support.
Light flickers.	Loose wiring connection; incompatible dimmer switch (if applicable); faulty LED component.	Verify all wiring is tight. Ensure your dimmer switch is LED-compatible. If flickering continues, contact customer support.
Incorrect color temperature or no change.	Switching sequence error; internal component issue.	Toggle the wall switch slowly to cycle through color options. If the issue persists, contact customer support.

8. SPECIFICATIONS

Feature	Detail
Brand	Siljoy
Model Name	HLP168-234567
ASIN	B0BBQWBQCK
Material	Crystal, Stainless Steel
Style	Modern
Light Source Type	LED
Wattage	100 Watts (Built-in LED strip)
Voltage	110 Volts
Color Temperature	3-Color Adjustable (Warm, Neutral, Cool White)
Product Dimensions	30"L x 30"W x 5"H (Overall, 5 rings: 8"-12"-16"-20"-24")
Cable Length	Max 118" (300cm), Adjustable
Item Weight	22.6 pounds (10.25 Kilograms)
Installation Type	Semi Flush Mount
Indoor/Outdoor Usage	Indoor
Special Features	Adjustable Color Temperature, Adjustable Height, Dimmable, Memory Function

9. WARRANTY & SUPPORT

Siljoy is committed to providing high-quality products and customer satisfaction.

9.1 Warranty

This product comes with a **3-year warranty** from the date of purchase. Siljoy promises free return and replacement within 1 month for quality problems. If you receive the chandelier with any defect in workmanship or any broken parts, please contact us for a replacement.

9.2 Customer Support

For any questions, concerns, or assistance with your Siljoy chandelier, please do not hesitate to contact our customer service team. We are available 7 days a week, 24 hours a day to assist you.

Contact Information:

Email: [Insert Customer Service Email Here]
Phone: [Insert Customer Service Phone Number Here]
Website: [Siljoy Official Store on Amazon](#)

© 2025 Siljoy. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0BBQWBQCK>

More documents and user manuals: <https://manuals.plus/>