

TREEGERS
TREEGERS TELOS App



TREEGERS TELOS App User Guide

[Home](#) » [TREEGERS](#) » TREEGERS TELOS App User Guide 

Contents


- [1 TREEGERS TELOS App](#)
- [2 App Setup](#)
- [3 Warranty Information](#)
- [4 Setting the PPF Output](#)
- [5 Network Lock Mode](#)
- [6 Applying a Schedule](#)
- [7 Trouble Shooting](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

TREEGERS

TREEGERS TELOS App




Telos Mesh Quick Start Guide

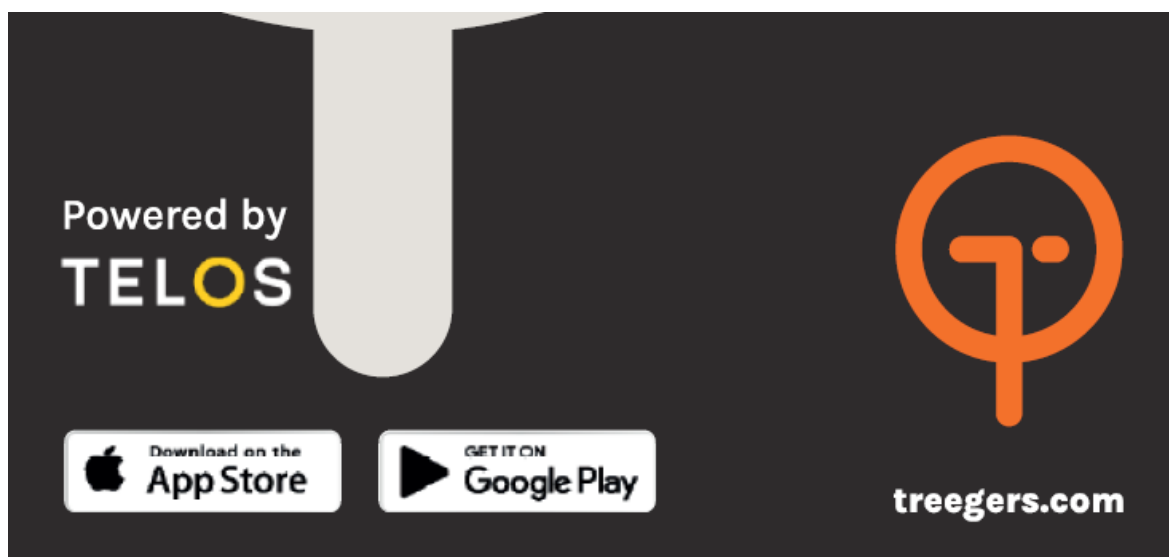

App Setup

1. Open the Teles app and select 'Create network'.

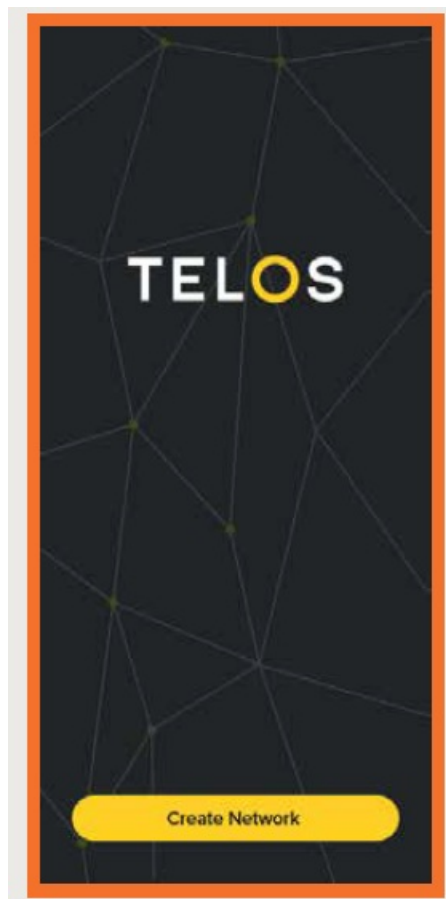

2. Enter a network name and select “Private” mode (cloud mode is currently in development.).

The image shows the "Create a new network" screen in the TELOS app. It has a dark background with a white back arrow in the top left corner. The title "Create a new network" is at the top, followed by the instruction "Add a network name, select a network type." Below this is a text input field labeled "Name". There are two selectable options: "Private" and "Cloud". The "Private" option is currently selected and highlighted with a white border. Below these options are text input fields for "Email" and "Password". At the bottom, there is a yellow rounded rectangular button labeled "Complete".

◀

Create a new network

Add a network name, select a network type.

Name

Private

Saves all Mesh keys & settings to the device.
Simplest network type but will require manual recovery if device is lost or app is deleted.

Cloud


Saves all Mesh keys & settings to the cloud.
This is the best option for using multiple devices and easy network recovery.

Email


Password

Complete


3. Press 'Scan for lights'. Make sure that the Growcast itself is in Bluetooth pairing mode (flashing blue).

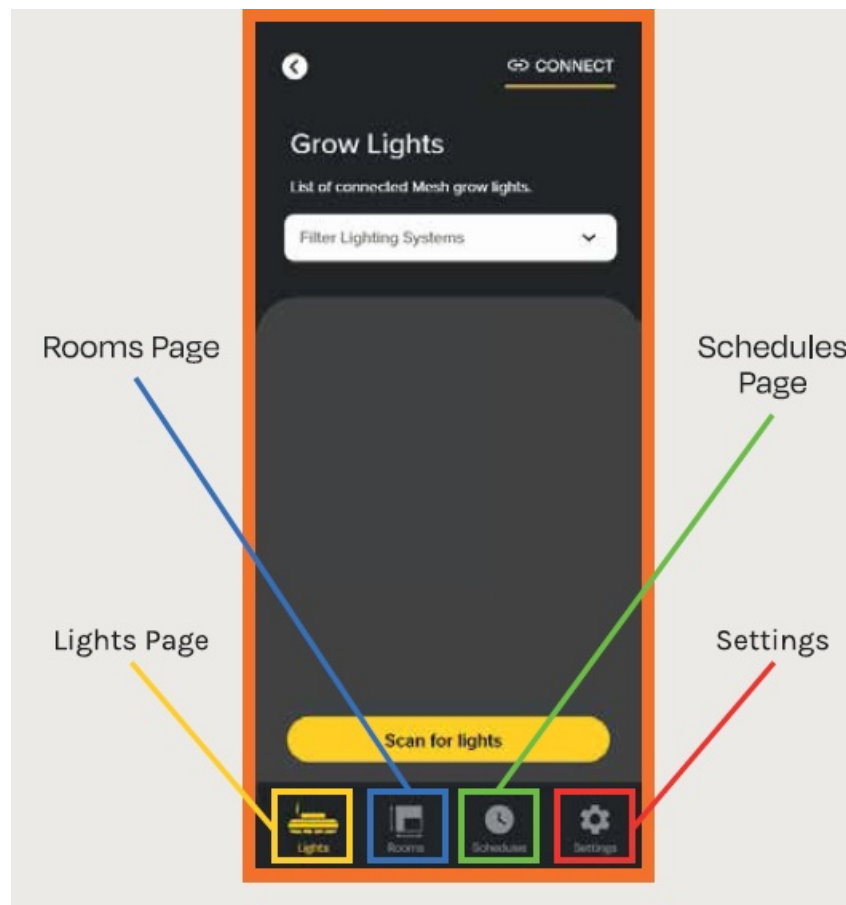


4. Select a "Grow light" from the scan list to start the provisioning process. If provision fails, see troubleshooting.

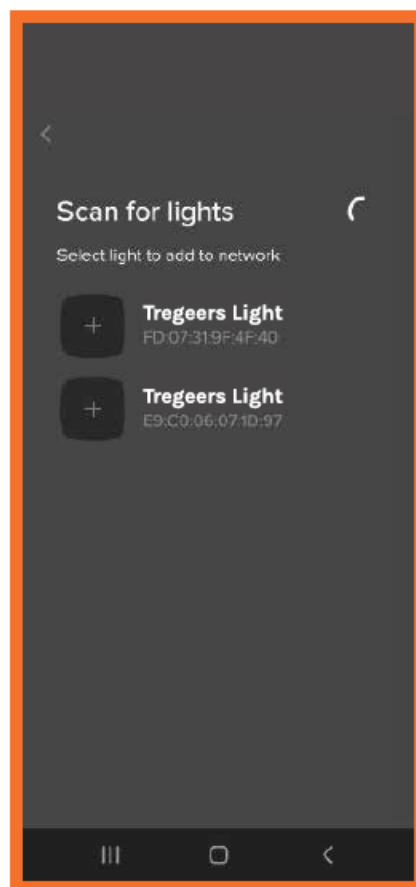

5. Select which type of light is connected to the Growcast. Select "other" if your light is not preconfigured.

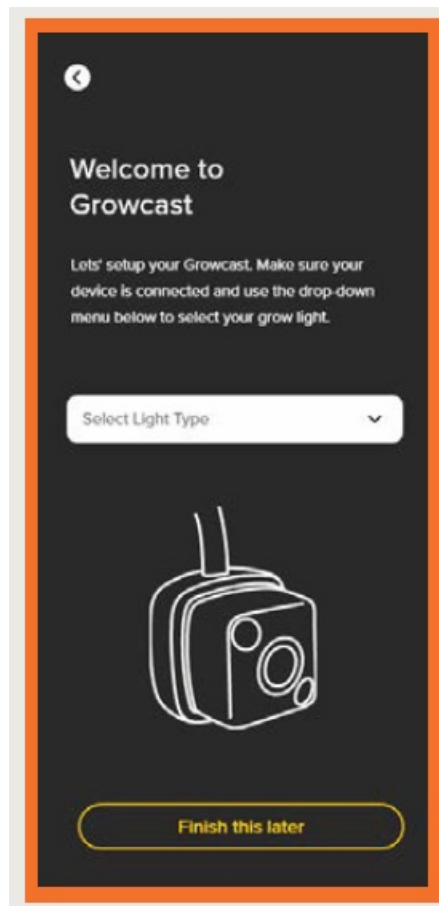

6. The page will now display the specifications for your selected light. If "other11" was selected, these will need input manually.

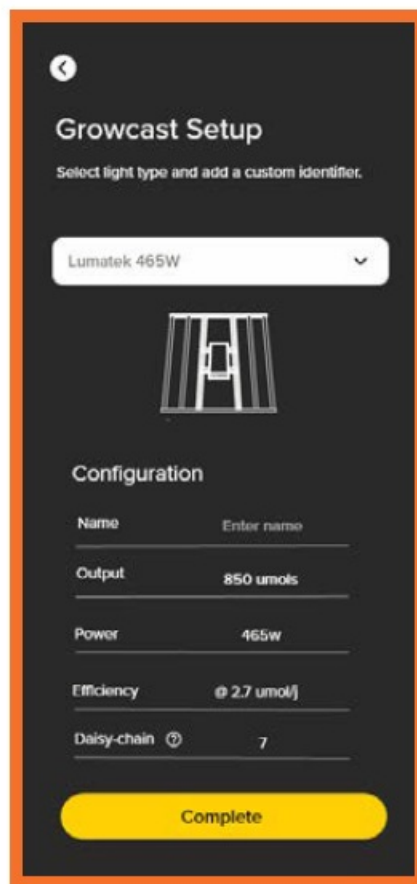

Warranty Information

This Treegers Growcast will be free from defects in manufacturing or workmanship for a period of two years from the date of purchase. If the product is found to have a defect during this time then Treegers will repair the product free of charge. If a repair is not feasible then a replacement product will be provided.

This warranty does not cover faults or damage occurring from abuse or misuse or normal wear and tear or cosmetic issues arising from normal wear and tear. This includes incorrect installation of the product, use with a non-compatible lighting fixture or other unintended use.


For warranty support please contact Treegers at support@treegers.com

Copyright Treegers 2024


All rights reserved. Treegers reserves the right to make changes in print documentation at any time without notice or obligation and will not be liable for any consequences resulting from the misuse of this information.

Setting the PPF Output


1. To adjust the PPF intensity of your Mesh controlled lights. Simply click into your connected growcast.

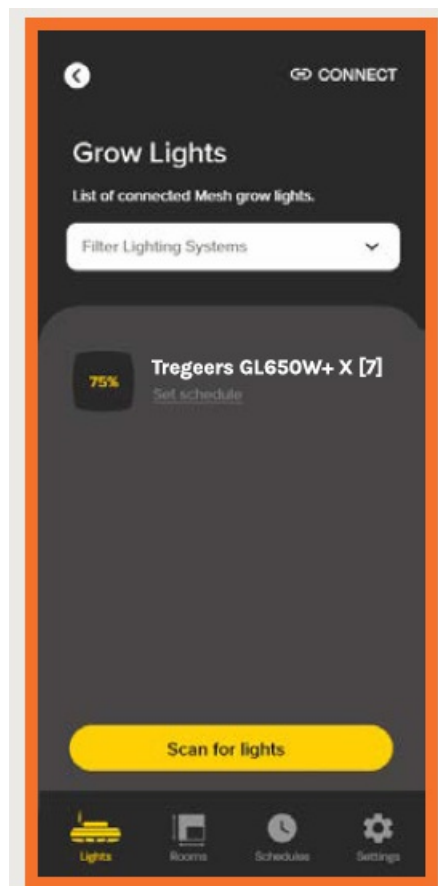

2. Use the scroll bar to change the PPF output between 0-100%.

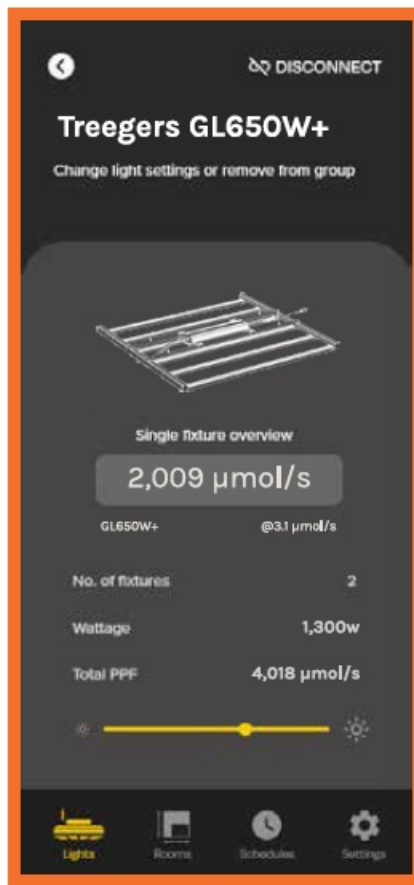

3. Alternatively, enter the desired PPF setting directly in the input box.

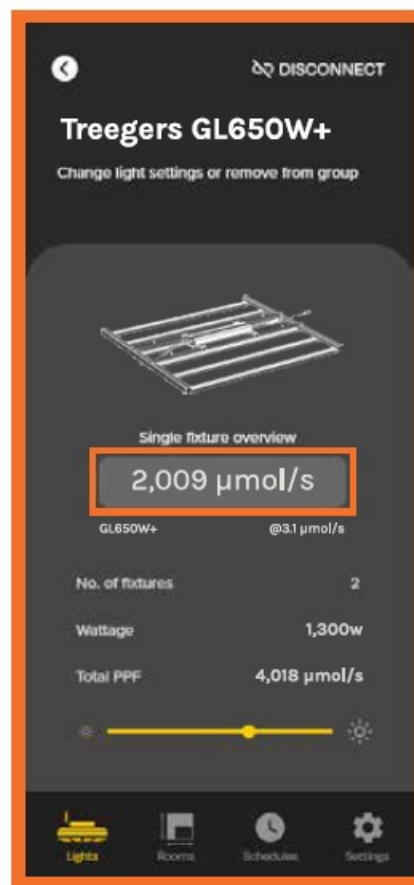

Network Lock Mode

Activation

Network Lock is a unique feature that puts the user in control of the privacy of their devices when using Telos Mesh technology.

Once enabled, Network Lock stops the Mesh hardware from sending public Bluetooth advertising packets; hiding your lights and mesh network from anyone in the nearby area searching for Bluetooth devices.

De-activation


To deactivate Network Lock mode you must make a manual adjustment on the Growcast touch sensor.

With Network Lock mode activated (status LED has purple glow) tap 5 times in succession on the touch sensor.


The status LED should revert to 'blue' and you will be able to reconnect to the light through the Telos Mesh app.

Applying a Schedule


1. Select the Schedule page from the bottom menu to create and manage the lighting schedules

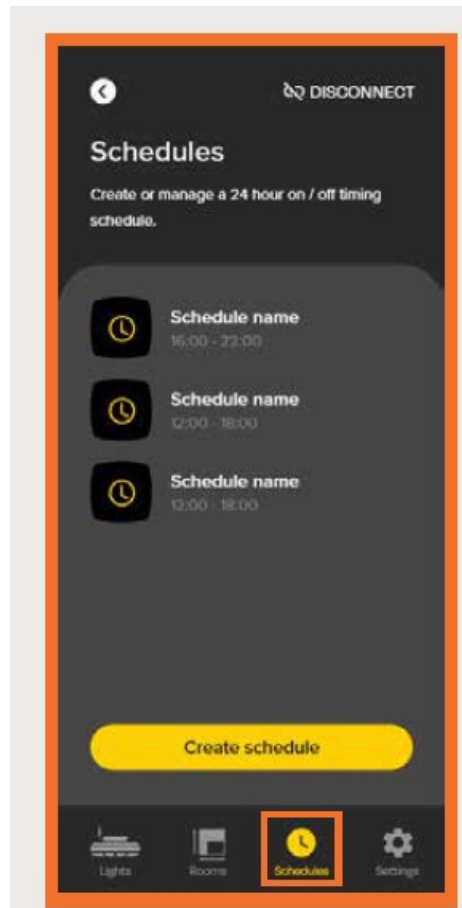

2. Name your schedule and use the scroll wheels to set the on & off time. Optional sunrise/sunset is available.

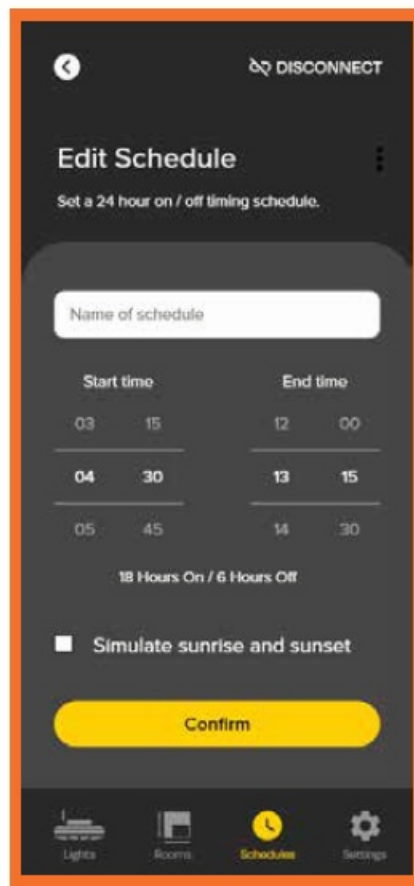

- Once confirmed. Select the light from the Grow Lights page then press 'apply schedule' to set the previously created schedule.

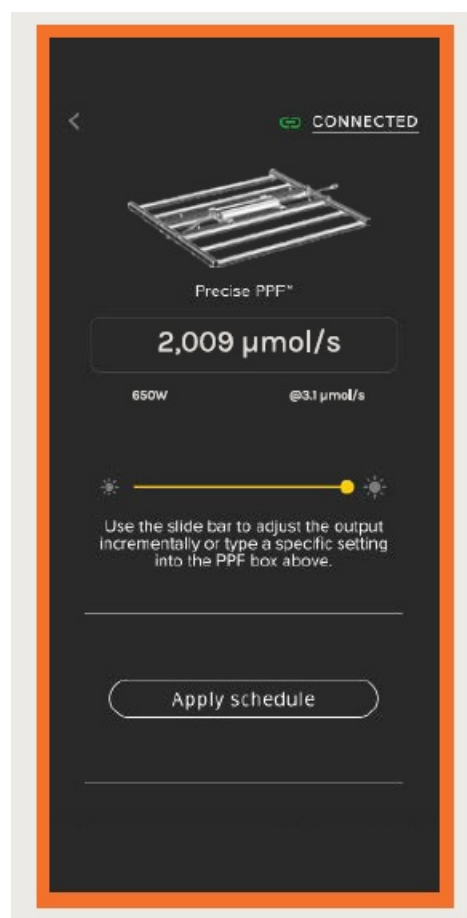

Trouble Shooting

1. **Q: My Growcast keeps disconnecting from the app.**

A: Unlike a paired Bluetooth device that will automatically reconnect when in range, when you go out of range of the Growcast or close the app it will disconnect but not reconnect which can make the disconnections more obvious. If your device repeatedly disconnects and you haven't left the room then try repositioning the device to ensure a better connection.

Q: Blue status light has 'disappeared'.

A: This is normal functionality for a Growcast in a scheduled 'off' period as blue light could interrupt the plants dark cycle. You should be able to see a repeating green flash indicating that the schedule is still active.


2. **Q: My Growcast has failed to provision.**

A: If your Growcast repeatedly fails to provision, it's likely that it's already added to another network. Simply follow the hardware reset steps and then attempt to provision again. The status LED must be flashing blue when provisioning a growcast.

For more in-depth trouble shooting, detailed instructional guides can be found on the Telos or Treegers YouTube channel.

Further questions? Don't hesitate to contact us!

Documents / Resources

	<p>TREEGERS TELOS App [pdf] User Guide TELOS, TELOS App, App</p>
--	--

References

- [User Manual](#)

Manuals+ Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.