



TRIPP-LITE B127U-111-PDPD DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater Owner's Manual

[Home](#) » [Tripp Lite](#) » [TRIPP-LITE B127U-111-PDPD DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater Owner's Manual](#) 

Contents

- [1 TRIPP-LITE B127U-111-PDPD DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Standard Splitter Kit Installation](#)
- [5 Product Features](#)
- [6 Optional Accessories](#)
- [7 Installation](#)
 - [7.1 Standard Extender Kit Installation](#)
- [8 Warranty and Product Registration](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



TRIPP-LITE B127U-111-PDPD DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater



Product Information

The product mentioned in the user manual is the DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with

Repeater, 4K/60 Hz. The specific models mentioned are as follows:

- **Extender Kit:** B127U-111-PDPD
- **2-Port Splitter Kit:** B127U-002-PDPD2
- **Receiver with Repeater:** B127U-110-PD

These kits are designed to extend DisplayPort signals over long distances using Cat6 cables. They support a maximum resolution of 4K at 60 Hz and offer a range for High Dynamic Range (HDR) content.

Product Usage Instructions

Standard Extender Kit Installation

1. Connect the pigtail DisplayPort connector on the transmitter unit to the DisplayPort input on the source.
2. (Optional) Using an HDMI 2.0 cable, connect a display to the LOCAL port on the transmitter unit.
3. Using a 24 AWG solid wire Cat6 cable, connect the RJ45 port on the local transmitter unit to the RJ45 input port on the remote receiver unit.
4. Connect the pigtail DisplayPort connector on the remote receiver unit to the DisplayPort port on the display.
5. Connect the pigtail USB-A connector on the local transmitter unit to a USB 3.0 port or a USB power adapter (5V/1A) and plug it into a wall power outlet. The LED next to the RJ45 port will illuminate solid green to indicate power reception.
6. Connect the pigtail USB-A connector on the remote receiver unit to a USB power adapter (5V/1A) or a USB 3.0 port on the display. The LEDs next to the RJ45 connectors will illuminate orange to indicate power reception.
7. (Optional) To charge the transmitter and receiver units, connect a MicroUSB to USB-A cable between each unit and a USB power adapter.
8. Turn on the power to your connected TVs/monitors.
9. Turn on the power to the DisplayPort source. The LEDs on both the transmitter and receiver units should start flashing to indicate video transmission, and the video should now be displayed on the connected monitor(s).
10. (Optional) For daisy-chain installation, repeat steps 4-7 with up to 3 additional B127U-110-PD or B127U-110-PH units (sold separately).

Standard Splitter Kit Installation

1. Connect the pigtail DisplayPort connector on the transmitter unit to the DisplayPort input on the source.
2. Connect the pigtail DisplayPort connector on the transmitter unit to the DisplayPort input on the source.
3. Using a 24 AWG solid wire Cat6 cable, connect the RJ45 port on the local transmitter unit to the RJ45 input port on the remote receiver unit.
4. Connect the pigtail DisplayPort connector on the remote receiver unit to the DisplayPort port on the display.
5. Connect the pigtail USB-A connector on the local transmitter unit to a USB 3.0 port or a USB power adapter (5V/1A) and plug it into a wall power outlet. The LED next to the RJ45 port will illuminate solid green to indicate power reception.
6. Connect the pigtail USB-A connector on the remote receiver unit to a USB power adapter (5V/1A) or a USB 3.0 port on the display. The LEDs next to the RJ45 connectors will illuminate orange to indicate power reception.
7. (Optional) To charge the transmitter and receiver units, connect a MicroUSB to USB-A cable between each unit and a USB power adapter.

8. Turn on the power to your connected TVs/monitors.
9. Turn on the power to the DisplayPort source. The LEDs on both the transmitter and receiver units should start flashing to indicate video transmission, and the video should now be displayed on the connected monitor(s).

Product Features

B127U-111-PDPD

- DisplayPort over Cat6 Pigtail Transmitter and Receiver with Repeater Kit
- Extends a 4K x 2K (3840 x 2160) @ 60 Hz DisplayPort 1.2 A/V signal up to 230 ft. (70 m) from the source over 24 AWG Cat6 cabling
- Transmitter and receiver units can be powered by the built-in 1 ft. USB-A cables for connecting to the USB port on a display or to a USB power adapter, or by the Micro-USB ports on each unit
- 1 ft. DisplayPort connectors on transmitter and receiver units connect to the source and display
- View the transmitted video content on a local display via the 4K/60 Hz HDMI port on the transmitter unit
- Daisychainable up to 4 layers, with each additional B127U-110-PD receiver unit (sold separately) providing an additional 230 ft., up to a total of 920 ft. (280 m)
- Supports passthrough audio formats up to 7.1-channel surround sound
- Real-time video compression and decompression technology
- Compatible with HDCP 2.2 and 1.4 and High Dynamic Range (HDR)

B127U-002-PDPD2

- 2-Port DisplayPort over Cat6 Pigtail Splitter and Receivers Kit
- Extends a 4K x 2K (3840 x 2160) @ 60 Hz DisplayPort A/V signal to two displays up to 230 ft. (70 m) from the source over 24 AWG Cat6 cabling
- Transmitter and receiver units are powered by built-in 1 ft. USB-A cables for connecting to the USB port on a display or to a USB power adapter, or via the Micro USB ports on each unit
- Multi-Resolution technology allows the receivers to connect to any 1080p, 4K/30 Hz or 4K/60 Hz display without affecting the resolution of the other displays connected to the splitter
- 1 ft. DisplayPort connectors on transmitter and receiver units connect to the source and display
- Supports passthrough audio formats up to 7.1-channel surround sound
- Real-time video compression and decompression technology
- Compatible with HDCP 2.2 and 1.4 and High Dynamic Range (HDR)
- Compatible with DisplayPort (B127U-110-PD) and HDMI (B127U-110-PH) receivers to create flexible daisychain installations with multiple video outputs. Each port on the splitter can extend up to four connected receivers, for a total of eight receivers and 920 ft. (280 m) per daisychain (sold separately).

B127U-110-PD

- DisplayPort over Cat6 Pigtail Receiver with Repeater
- Extends a 4K x 2K (3840 x 2160) @ 60 Hz A/V signal up to 230 ft. (70 m) from the source when connected to a B127U-Series transmitter or splitter unit over 24 AWG Cat6 cabling

- Powered by built-in 1 ft. USB-A cable for connecting to the USB port on a display or to a USB power adapter, or via the unit's Micro-USB port
- 1 ft. DisplayPort pigtail connector is used to connect to the display
- Supports passthrough audio formats up to 7.1-channel surround sound
- Real-time video compression and decompression technology
- Compatible with HDCP 2.2 and 1.4 and High Dynamic Range (HDR)
- Compatible with any B127U-Series transmitter or splitter to create flexible DisplayPort and HDMI video installations
- Daisychainable up to 4 layers, with each additional B127U-110-PD or B127U-110-PH receiver unit (sold separately) providing an additional 230 ft., up to a total of 920 ft. (280 m)

Optional Accessories

- N202-Series Cat6 24 AWG Solid Wire Patch Cables
- U280-W01-QC3-1 USB-A Wall Adapter, 18 Watts
- B127U-110-PH HDMI over Cat6 Receiver with Repeater


Installation

Standard Extender Kit Installation

Notes

- Test to ensure the entire installation works properly before pulling cables through ceilings/walls.
- To achieve maximum distance and performance, use 24 AWG solid wire Cat6 cable. Using stranded wire Cat6 cable or cable with a gauge (AWG) size higher than 24 AWG will result in shorter extension distance. Higher-gauge cabling, such as 26 AWG, has a more limited transmission capability than lower-gauge cabling. All Tripp Lite N202-Series Cat6 cables are made with 24 AWG solid wire cabling.
- The installation diagram shows a B127U-111-PDPD extender kit.
- The diagram shows additional B127U-110-PD receiver units (sold separately, see tripplite.com) in a daisy-chain installation.
- The B127U-Series of transmitter/receiver units can be mixed and matched as desired with either HDMI or DisplayPort video outputs within one installation. The B127U-Series HDMI transmitter products can be used with the B127U-110-PD DisplayPort receiver (and vice-versa) with the B127U-Series DisplayPort transmitter and B127U-110-PH HDMI receiver. Up to four receivers can be daisychained at once.

Installation

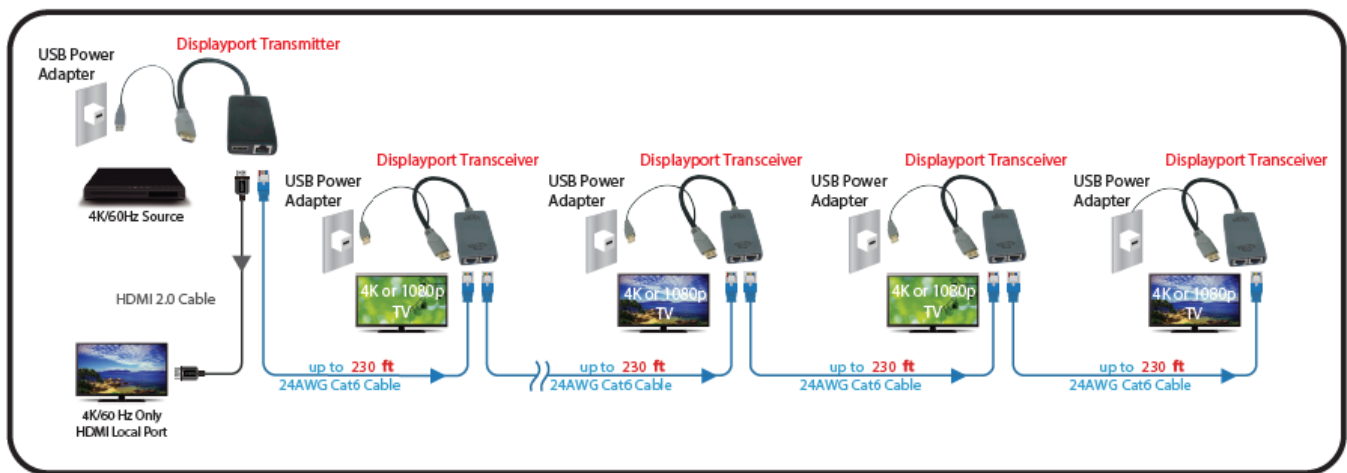

1. Make sure all equipment in the installation – such as TVs, Blu-ray players and the transmitter – is powered off.
2. Connect the pigtail DisplayPort connector on the transmitter unit to the DisplayPort input on the source.
Optional: Using an HDMI 2.0 cable (such as Tripp Lite's P569-XXX-CERT or P568-XXX-2A Series cables), connect a display to the LOCAL port on the transmitter unit.
3. Using 24 AWG solid wire Cat6 cable, connect the RJ45 port on the local transmitter unit to the RJ45 input port on the remote receiver unit.
4. Connect the pigtail DisplayPort connector on the remote receiver unit to the DisplayPort port on the display.
5. Connect the pigtail USB-A connector on the local transmitter unit to a USB 3.0 port or a USB power adapter (5V/1A) and into a wall power outlet. The LED next to the RJ45 port will illuminate solid green to indicate the unit is receiving power.
6. Connect the pigtail USB-A connector on the remote receiver unit to a USB power adapter (5V/1A) or a USB 3.0 port on the display. The LEDs next to the RJ45 connectors will illuminate orange to indicate the ports are receiving power.
Optional: The transmitter and receiver units can be charged via the Micro-USB ports on each unit by connecting a Micro-USB to USB-A cable between each unit and a USB power adapter.
7. Turn on the power to your connected TVs/monitors.
8. Turn on the power to the DisplayPort source. The LEDs on both the transmitter and receiver units should begin to flash to indicate video is being transmitted and the video should now display on the connected monitor(s).
Note: If a daisy-chain installation is desired, repeat steps 4-7 with up to 3 additional B127U-110-PD or B127U-110-PH units (sold separately).


Standard Splitter Kit Installation

Notes

- Test to ensure the entire installation works properly before pulling cables through ceilings/walls.
- To achieve maximum distance and performance, use 24 AWG solid wire Cat6 cable. Using stranded wire Cat6 cable or cable with a gauge (AWG) size higher than 24 AWG will result in shorter extension distance. Higher-gauge cabling, such as 26 AWG, has a more limited transmission capability than lower-gauge cabling. All Tripp Lite N202-Series Cat6 cables are made with 24 AWG solid wire cabling.
- The installation diagram shows a B127U-002-PDPD2 splitter kit.
- The diagram shows additional B127U-110-PD and B127U-110-PH receiver units (sold separately, see

tripplite.com) in a daisy chain installation.

- The B127U-Series of transmitter/receiver units can be mixed and matched as desired with either HDMI or DisplayPort video outputs within one installation. The B127U-Series HDMI transmitter products can be used with the B127U-110-PD DisplayPort receiver (and vice-versa) with the B127U-Series DisplayPort transmitter and B127U-110-PH HDMI receiver. Up to four receivers can be daisychained at once.

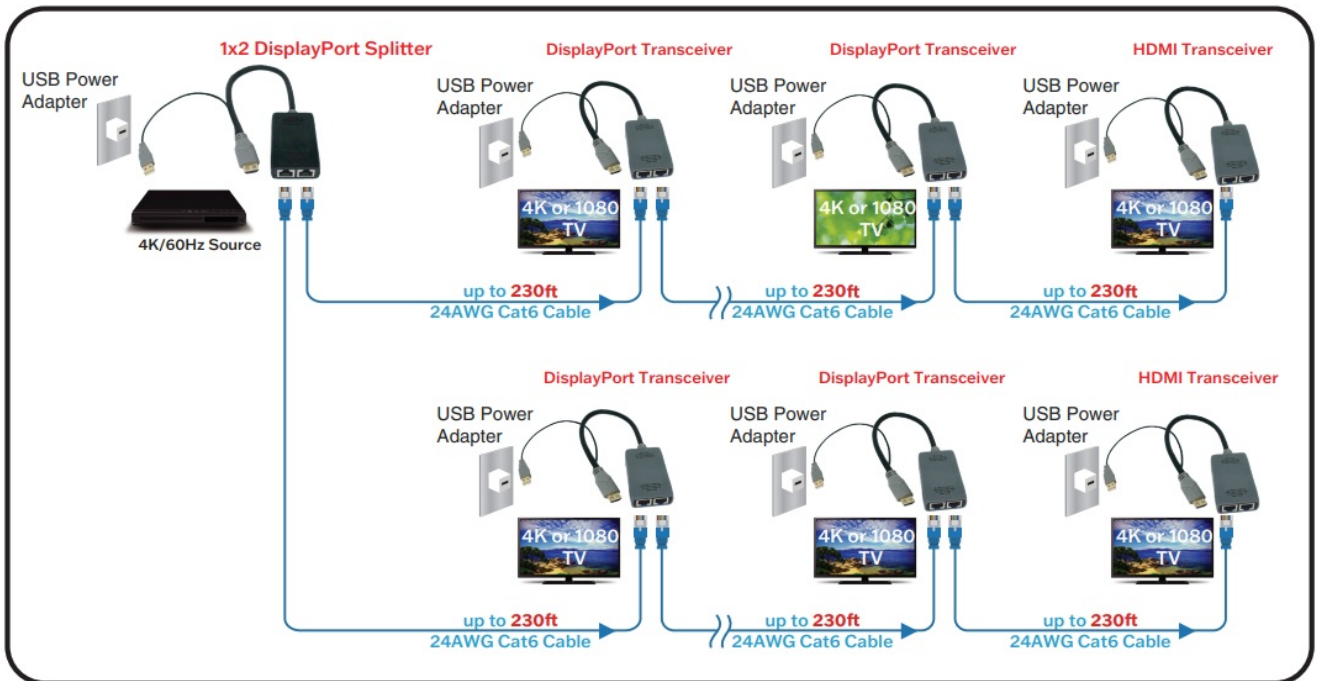

1. Make sure all equipment in the installation – such as TVs, Blu-ray players and the transmitter – is powered off.
2. Connect the pigtail DisplayPort connector on the transmitter unit to the DisplayPort input on the source.
3. Using Cat6 cable, connect the RJ45 ports on the local transmitter unit to the RJ45 input ports of each remote receiver unit.
4. Connect the pigtail DisplayPort connector on the remote receiver units to the DisplayPort input ports of each display.
5. Connect the pigtail USB-A connector on the local transmitter unit to a USB power adapter and into a wall power outlet. The LED next to the RJ45 port should illuminate to indicate the unit is receiving power.
6. Connect the pigtail USB-A connector on the remote receiver units to USB power adapters or a USB port on the displays. The LEDs next to the RJ45 ports should illuminate to indicate the units are receiving power.
Optional: The transmitter and receiver units can be charged via the Micro-USB ports on each unit by connecting a Micro-USB to USB-A cable between each unit and a USB power adapter.
7. Turn on the power to your connected TVs/monitors.
8. Turn on the power to the DisplayPort source. The LEDs on the transmitter and receiver units should begin to flash to indicate video is being transmitted and the video should now display on the connected monitor(s).

Warranty and Product Registration

1-Year Limited Warranty

TRIPP LITE warrants its products to be free from defects in materials and workmanship for a period of one (1) year from the date of initial purchase. TRIPP LITE's obligation under this warranty is limited to repairing or replacing

(at its sole option) any such defective products. To obtain service under this warranty, you must obtain a Returned Material Authorization (RMA) number from TRIPP LITE or an authorized TRIPP LITE service center. Products must be returned to TRIPP LITE or an authorized TRIPP LITE service center with transportation charges prepaid and must be accompanied by a brief description of the problem encountered and proof of date and place of purchase. This warranty does not apply to equipment which has been damaged by accident, negligence or misapplication or has been altered or modified in any way.

EXCEPT AS PROVIDED HEREIN, TRIPP LITE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some states do not permit limitation or exclusion of implied warranties; therefore, the aforesaid limitation(s) or exclusion(s) may not apply to the purchaser.

EXCEPT AS PROVIDED ABOVE, IN NO EVENT WILL TRIPP LITE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Specifically, TRIPP LITE is not liable for any costs, such as lost profits or revenue, loss of equipment, loss of use of equipment, loss of software, loss of data, costs of substitutes, claims by third parties, or otherwise.

PRODUCT REGISTRATION

Visit tripplite.com/warranty today to register your new Tripp Lite product. You'll be automatically entered into a drawing for a chance to win a FREE Tripp Lite product!*

No purchase necessary. Void where prohibited. Some restrictions apply. See website for details.

WEEE Compliance Information for Tripp Lite Customers and Recyclers (European Union)

Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Tripp Lite they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste


WARNING

Use of this equipment in life support applications where failure of this equipment can reasonably be expected to cause the failure of the life support equipment or to significantly affect its safety or effectiveness is not recommended.

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos and illustrations may differ slightly from actual products.

1111 W. 35th Street, Chicago, IL 60609 USA • tripplite.com/support

Documents / Resources

	<p>TRIPP-LITE B127U-111-PDPD DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater [pdf] Owner's Manual</p> <p>B127U-111-PDPD, B127U-002-PDPD2, B127U-110-PD, B127U-111-PDPD DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater, DisplayPort Over Cat6 Pigtail Extender Kits and Receiver with Repeater, DisplayPort Over Cat6 Pigtail Extender Kits and Receiver, Over Cat6 Pigtail Extender Kits and Receiver, Cat6 Pigtail Extender Kits and Receiver, Pigtail Extender Kits and Receiver, Extender Kits and Receiver</p>
---	--

References

- [Eaton - Power and Connectivity Solutions](#)
- [Help Center | Eaton](#)
- [Product Registration | Eaton](#)

