



UNI-T LM555LD Voltage Meter Instruction Manual

[Home](#) » [UNI-T](#) » UNI-T LM555LD Voltage Meter Instruction Manual

UNI-T



P/N:110401109525X



LM555LD

Contents [[hide](#)]

- [1 Preface](#)
- [2 Limited Warranty and Liability](#)
- [3 Description](#)
- [4 Safety Instruction](#)
- [5 Cautions](#)
- [6 Battery Charging and Safety Instructions](#)
- [7 Operation Guideline](#)
- [8 Battery Indicator](#)
- [9 Specification](#)
- [10 Maintenance](#)
- [11 Accessories](#)
- [12 Operating Demonstration Video](#)
- [13 Documents / Resources](#)
- [14 Related Posts](#)

Preface

Thank you for purchasing this brand new product. In order to use this product safely and correctly, please read this manual thoroughly, especially the safety notes. After reading this manual, it is recommended to keep the manual at an easily accessible place, preferably close to the device, for future reference.

Limited Warranty and Liability

Uni-Trend guarantees that the product is free from any defect in material and workmanship within one year from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination or improper handling. The dealer shall not be entitled to give any other warranty on behalf of Uni-Trend. If you need warranty service within the warranty period, please contact your seller directly. Uni-Trend will not be responsible for any special, indirect, incidental or subsequent damage or loss caused by using this device.


Description





Safety Instruction

Please carefully read and obey the following safety instructions before use, otherwise may void the warranty:

<p>Warning!</p> <ul style="list-style-type: none"> • Class II laser product • Maximum output power: $\leq 1\text{mW}$ • Wavelength: 510nm-515nm 	 <p>IEC/EN 60825-1</p>
<p>Laser radiation:</p> <ul style="list-style-type: none"> • Never stare into the laser beam directly • Do not expose eyes to the laser beam directly • Avoid using optical instrument 	

Cautions

Please read all the instructions carefully before operation. Do not remove any label of device.

- Do not expose eyes to the laser beam (green/red laser) during operation. Prolonged exposure to the laser beam may cause eye damage.
- Never stare into at the laser beam directly or observing it by any optical instrument. Do not set the meter at a visual height (to avoid injury caused by exposing eyes to laser beam).
- Do not disassemble or modify the laser meter in any way. No inner parts can be repaired by users. Unauthorized modifications may emit harmful laser radiation.
- Keep the laser meter away from children or serious injury may occur.
- Class II laser should not be observed for more than 2s.
- For safety and convenience, the following print (or label) should be placed on product to inform the laser type. Some product sets provide with accessory glasses. Please note that this kind of glasses is not safety glasses. It only helps user to easily identify the laser beam in strong ambient light or far away from the laser meter source.

Battery Charging and Safety Instructions

2 build-in 18650 Li-ion batteries of this product are not allowed to be removed by users. Otherwise we will not responsible for this kind of repair.

Safety of Li-ion Battery:


- Please charge the device with the equipped data cable and adapter.
- It takes at least 4 hours but no more than 24 hours to charge each time.
- Please charge in 24 hours when the battery is low or the laser is shut down by low power.
- Keep the device away from children and pets.
- Do not charge the device in unattended condition.
- Avoid charging or storing the batteries in cars. Do not place the batteries near the source of heat to prevent ignition caused by extremely high or low temperature.

Operation Guideline

Turn on the laser:

• Self-leveling Mode


Switch the movement lock to the right, the unlocked status, to turn on the laser and self-leveling mode by default. At this point, the horizontal laser will be enabled. Press the vertical laser button to open V1, V3 laser window and the lower reference point. The buzzer alarm will be triggered if the leveling angle of 3.5° is exceeded.

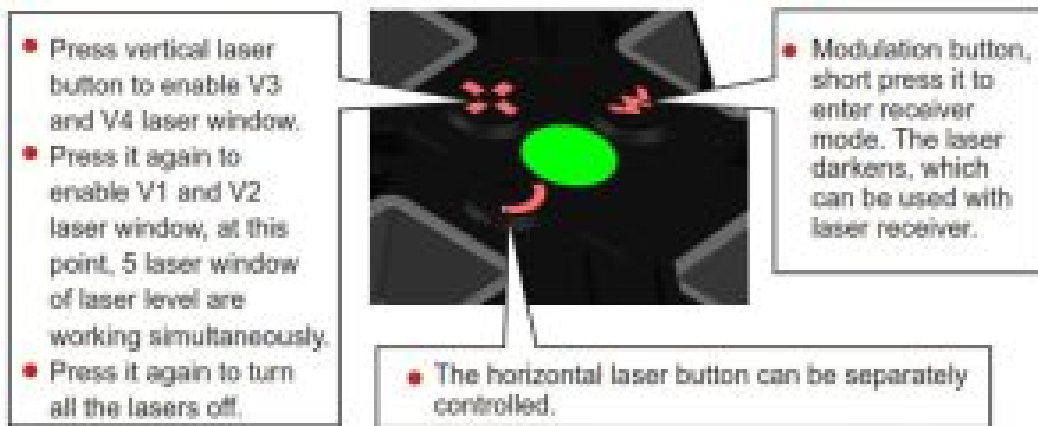


- Keep the movement lock in locked status, long press the vertical/horizontal laser button to turn on laser, and the device enters manual mode.




Battery Indicator

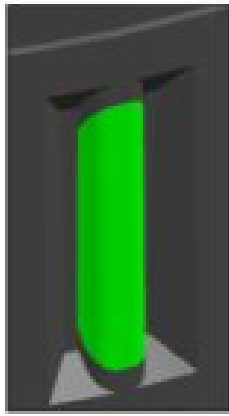

Green indicates
high battery

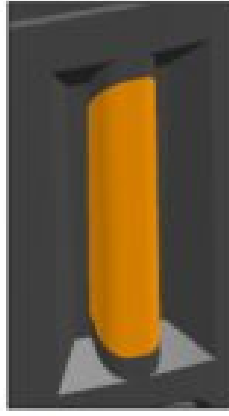

Yellow indicates
medium battery

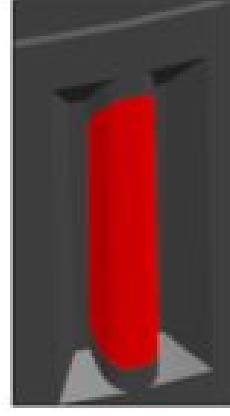

Red indicates l
ow battery

Specification

Product size	126mm x 120mm x 204.5mm	
Self-leveling	√	
Laser level	Class II IEC/EN.60825-1 2014	
USB charging	√	
Accuracy	±2mm/10m	
Straightness accuracy	±2mm/10m	
Lower reference point accuracy	1mm/70cm	
Self-leveling angle	3.5°	
Operating distance (200Lux)	20m (line)	25m (point)
Operating time	5h	
IP rating	IP54	
Operating temperature	-5C~t40°C	
Line width (10m)	3mm±1mm	

Maintenance

- The laser device has been carefully calibrated and packaged according to various precise specifications before leaving the factory.
- It is recommended to perform accuracy test before the first-time use and perform test regularly, especially during high precision requirements.
- Turn the device off when it is not in use.
- Do not short-circuit the battery contacts, charge the alkaline battery, or throw the battery into fire, these actions may cause dangerous accidents.
- Do not use old and new batteries simultaneously. Be sure to replace all of them with the same type of batteries in the same brand.
- Keep the battery out of the reach of children.

- Do not expose the meter to sunlight or high temperatures. The meter shell and some parts are made of plastic, which may be damaged in high-temperature environments.
- Clean the outer plastic parts with a damp cloth. It is not recommended to clean it with dissolvent. Wipe away moisture with a dry soft cloth before putting the meter into the box.
- Store the meter properly in its pouch or package. Remove the batteries during long-time storage to avoid battery leakage.
- Do not dispose the meter into household trash.
- Dispose the battery or related electronic waste according to local laws and WEEE (Waste Electrical and Electronic Equipment) rules.

Accessories

- LM555LD Laser Level
- USB data cable
- 5V1A adapter
- Green laser glasses
- Fiducial mark
- Aluminum case
- English Manual
- Toolbox strap

Operating Demonstration Video




<http://qr03.cn/BrFiQ1>

UNI-T

UNI-TREND TECHNOLOGY (CHINA) CO., LTD.

No.6, Gong Ye Bei 1st Road,
Songshan Lake National High-Tech Industrial
Development Zone, Dongguan City,
Guangdong Province, China
Made in China

Documents / Resources



[UNI-T LM555LD Voltage Meter](#) [pdf] Instruction Manual
LM555LD, Voltage Meter