



Contents [[hide](#)]

- [1 VARMILO Minilo75 Pro Mechanical Keyboard](#)
- [2 Specifications](#)
- [3 Product Feature](#)
- [4 Daily Maintenance](#)
- [5 Layout](#)
- [6 Matters Need Attention](#)
- [7 Indicator Light](#)
- [8 Wired, Wireless\(Bluetooth & 2.4G\) Channel Switching](#)
- [9 Bluetooth Mode Connection Operation](#)
- [10 Current Light Effect](#)
- [11 Multimedia Function](#)
- [12 Driver Function Description](#)
- [13 Maintenance Instructions](#)
- [14 FCC WARNING](#)
- [15 FAQs](#)
- [16 Documents / Resources](#)
 - [16.1 References](#)

VARMILO

VARMILO Minilo75 Pro Mechanical Keyboard



Specifications

- **Model:** 75 ProRGB Varmilo Minilo75 Pro
- **Version:** Ver1.5
- **Compatibility:** Mac, Windows
- **Connectivity:** 2.4G wireless
- **Layout:** 75%

Preface

Varmilo comes from Esperanto 'Via' 'armilo' armilo, which means the unique keyboard customized for you. We were born to meet customers' personalities and variety as well as keep good craftsmanship and stable quality. Varmilo is aiming at beautifying your desk setup by endless improvement and boundless innovation!

- By keyboard artist Varmilo

Product Feature


The brand-new Varmilo mechanical keyboard series adopts the Chery MX switches from Germany with stable internal structures and tactility.

Daily Maintenance

To clean a keyboard, pull out the keycaps using a key puller, put the keyboard upside down, pat the back of the keyboard to pour out impurities, and brush off the impurities and dust that are adhered to the keys. If residuals exist, wipe them off using a clean cloth with some alcohol. After that, dry the keyboard in a cool and ventilated place. To

avoid a loose or fallen USB port, do not frequently plug, unplug, drag or bend a keyboard cable.

Layout

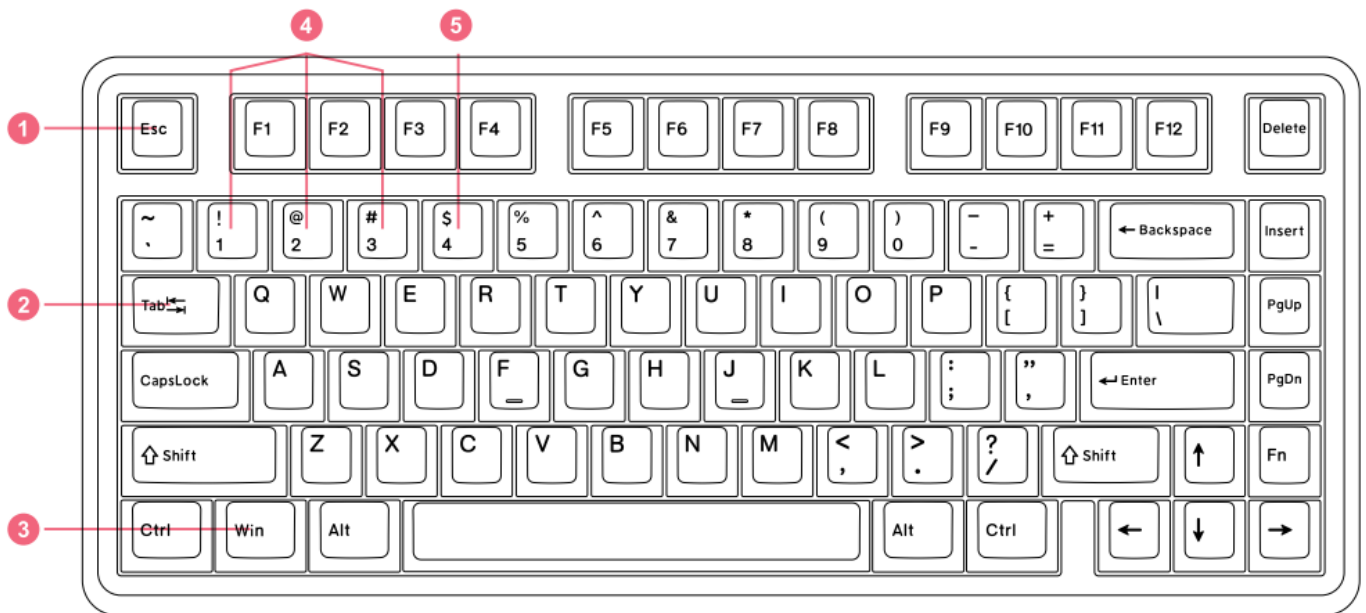

Matters Need Attention

- The Bluetooth device must be Bluetooth 5.0 or above.
- All operations combined with Fn key must first press Fn and then press the combined function key to perform the function; the key is released in no particular order.


Indicator Light

Press Fn to check the following indicator lights:

1. Battery indicator light: Green light is on when battery level exceeds 75%, orange light is on when battery level is between 25% and 75%, and red light is on when battery level is below 25%.
2. System indicator light: Green light is on in Mac mode, light off in Win mode.
3. Win indicator light: Red light is on when the Win key is locked, light off when unlocked.
4. Bluetooth channel indicator light: Light is on when connected, light flashes when waiting for connection.
5. 2.4G indicator light: Light is on when 2.4G is connected, light flashes when 2.4G is waiting for connection.

Wired, Wireless(Bluetooth & 2.4G) Channel Switching

- The wireless mode switch is on the left rear side of the keyboard.
- Facing the wireless mode switch and flip the switch to the left/middle/right side, the wired mode / Bluetooth mode / 2.4G mode is on.
- The corresponding mode icons are above the mode switch.

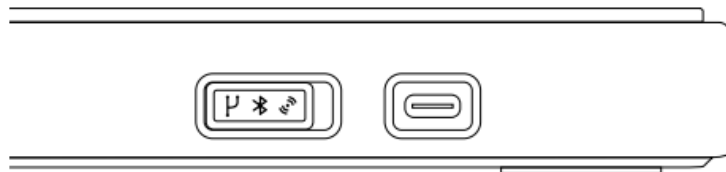

- When the keyboard is in wireless mode, then connect the charging cable is for charging the keyboard.

Bluetooth Mode Connection Operation

- The Bluetooth name of the keyboard is “Minilo75 1/2/3”. Bluetooth searchable time is 2 minutes.
- Press Fn + 1 or 2, or 3 to switch Bluetooth channel. The indicator light flashes when searching devices. After the setting is successful, the indicator light remains on for a period of time, and then it follows the keyboard backlight.
- Hold Fn + 1 or 2, or 3 for 3 seconds to reset the corresponding Bluetooth channel.

4G Pairing Operation

- In 2.4G mode, plug in the receiver to pair 2.4G. The code matching time is 20 seconds.
- Hold Fn + 4 for 5 seconds to pair 2.4G. The indicator light flashes when waiting for pairing. After the pairing is successful, the indicator light remains on for a period of time, and then it follows the keyboard backlight.
- The included 2.4G receiver has been paired with the keyboard directly.

Current Light Effect

- Press Fn + Left or Right Shift to switch the previous or next light effect mode of the backlight.
- Press Fn + “{” or “}” to switch the previous or next color under the monochrome light effect.

- Press Fn + “←” or “→” to reduces or increases the dynamic speed of the backlight.
- Press Fn + “↓” or “↑” to reduce or increase the light effect brightness of the backlight.
- Press Fn + Alt + Left or Right Shift to switch the previous or next light effect mode of logo backlight, which is on the front right side of the keyboard.
- Press Fn + Alt + “←” or “→” to reduce or increase the dynamic speed of logo backlight.
- Press Fn + Alt + “↓” or “↑” to reduce or increase the brightness of logo backlight.



The Logo Backlight

Multimedia Function

Combinations	Function	Combinations	Function	Combinations	Function	Combinations	Function
Fn + F	Music	Fn + G	Email	Fn + H	Calculator	Fn + J	Computer
Fn + F7	Last Song	Fn + F8	Play/Pause	Fn + F9	Next Song	Fn + F10	Mute
Fn + F11	Vol Down	Fn + F12	Vol Up				

System Switching

- Hold Fn + Tab for 5 seconds to switch to the Win or Mac mode. When the keyboard is used for the first time, the default mode is Win mode.

Mac Mode-Multi-Media Keys

- In Mac mode, press Fn + F1~F12 to trigger F1~F12 function.
- In Mac mode, some key functions are as follows

Key	Function	Key	Function	Key	Function	Key	Function
F1	Brightness-	F2	Brightness+	F3	Display all interfaces	F4	Display all APPs
F5	Backlit Brightness-	F6	Backlit Brightness+	F7	Last Song	F8	Play/Pause
F9	Next Song	F10	Mute	F11	Vol Down	F12	Vol Up
Win	Option	Alt	Command				

Hibernation and Shutdown

- 10 minutes without key operation, the keyboard turns into light hibernation mode. After 20 minutes of light hibernation mode, it turns into deep hibernation mode.
- Press any key to shut down hibernation mode.

Other

- Fn + “L” = Print Screen
- Fn + “ ” = Scroll Lock
- Fn + “ ” = Pause
- Fn + “ ” = Home
- Fn + “.” = End
- Press Fn + Win key to lock / unlock the Win key.
- Hold Fn + D for 5 seconds, and restore the keyboard to factory settings.

Driver Function Description

- You can set keyboard functions in the VIA driver.

Varmilo Warranty Service Information

- Varmilo provides a one-year free warranty service for keyboards and three months for accessories from the date of order receipt.
- The warranty period is based on this card and the date of purchase. Please keep it properly. If you lose this card, you can still use the purchase voucher (invoice, receipt) and the purchase information of e-commerce as the warranty basis.
- Free warranty service is only applicable to non-human quality problems in normal use. If the product is damaged due to human factors or force majeure, the free warranty service cannot be provided. Human factors include external damage (impact, scraping, etc.), liquid (water, beverage, etc.), unauthorized disassembling, removing the serial number or warranty sticker of the product itself, etc. Force majeure includes the damage caused by flood, dampness, rodent damage and other natural disasters.
- For products with printed patterns on the cases, please avoid wiping with alcohol and use clean water or alcohol-free cleaning products.

Maintenance Instructions

During the warranty period, you can enjoy the free warranty service. If exceeded free warranty period is exceeded, Varmilo will still provide paid maintenance service.

Customers could ask for warranty service from where you purchased the products, or contact support@zhihaihe.cn for further assistance.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet the general RF exposure statement.

The device can be used in portable exposure conditions without restriction.



Official Website



Weibo



Wechat



Instagram



Twitter



Scan the QR code for more detailed and updated news of Varmilo.

- ZhiHaiHe Marketing (ShenZ en Co., Ltd 5409: +86-755-2644 4428
- EIBJWEB: varmilo.cn/varmilo.com Room 1002, Unit 1, Building 2, Tenth Industrial Zone, Tianliao Community, Yutang Street, Guangming District, Shenzhen

FAQs


What is the warranty period for Varmilo keyboards?

Varmilo provides one year of free warranty service for keyboards and three months for accessories from the date of order receipt. The warranty is based on the purchase card or voucher.

What does the warranty cover?

The free warranty service covers non-human quality problems in normal use. It does not cover damages caused by human factors or force majeure events like natural disasters.

Documents / Resources

	<p>VARMIL0 Minilo75 Pro Mechanical Keyboard [pdf] User Manual</p> <p>2BDPP-MINILO75PRO, 2BDPPMINILO75PRO, Minilo75 Pro Mechanical Keyboard, Minilo75 Pro, Mechanical Keyboard, Keyboard</p>
---	---

References

- [User Manual](#)

📁 VARMILO

🔑 2BDPP-MINILO75PRO, 2BDPPMINILO75PRO, Keyboard, Mechanical keyboard, Minilo75 Pro, Minilo75 Pro Mechanical Keyboard, VARMILO

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.