



VigilLink VL-SW41-1 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps User Manual

[Home](#) » [VigilLink](#) » VigilLink VL-SW41-1 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps User Manual 



VL-SW41-1 4X1 HDMI2.0 Switch with Audio ARC 18Gbps VER 1.1 User Manual



Contents

- [1 VL-SW41-1 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps](#)
- [2 Introduction](#)
- [3 Package](#)
- [4 Features](#)
- [5 Specifications](#)
- [6 Switcher Operation controls and Functions](#)
- [7 IR Remote](#)
- [8 Application Example](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

Thank you for purchasing this product.

For optimum performance and safety, please read these instructions carefully before connecting, operating, or adjusting this product. Please keep this manual for future reference.

Introduction

This is a high-performance HDMI 4×1 switcher that supports HDTV formats up to 4Kx2K@60Hz and all HDMI 3D TV formats. It can extract HDMI stream audio to separate digital and analog audio output. This product supports HDCP repeater/CEC/ARC functions. Select any of the inputs by the front panel button or IR Remote, the corresponding indicator LED on the front panel will be illuminated.

Package

- 1 x HDMI 4×1 Switcher
- 1 x 5V/1A Power Adapter
- 1 x 38KHz IR Rx cable
- 1 x Optical convert header (for SPDIF audio output)
- 1 x HDMI 4×1 IR Remote
- 1 x Operation Manual

Features

- Compliant with HDMI 2.0a, DVI 1.0 standards
- HDCP 2.2 and HDCP 1.4 compliant
- Video formats up to 4Kx2K@60 and all HDMI 3D video formats
- Supports PCM, Dolby TrueHD, DTS-HD Master Audio up to 7.1CH
- Digital and analog audio output
- Support smart EDID management(Auto/2CH/5.1CH/7.1CH selectable)
- Support input port auto switching or manual switching mode
- Audio Return Channel (ARC) supports

Specifications

Frequency Bandwidth 18Gbps

Input Ports 4 HDMI Female ports, 1 IR Receive port and 1 RS232 port

Output port 1 HDMI Female port and 1 L/R & Optical port

HDMI Audio Output PCM2.1/5.1/7.1CH, Dolby5.1, DTS5.1, Dolby-TrueHD,

DTS-HD

ESD Protection Human Body Model: ± 8kV (air-gap discharge)

± 4kV (contact discharge)

Dimensions (mm) 180 (D) x85 (W) x 11.6 (H)


Weight (g) 300

Power Consumption Max 2.5W

Operating Temperature 0°C ~ 40°C / 32°F ~ 104°F


Storage Temperature -20°C ~ 60°C / -4°F ~ 140°F

Switcher Operation controls and Functions

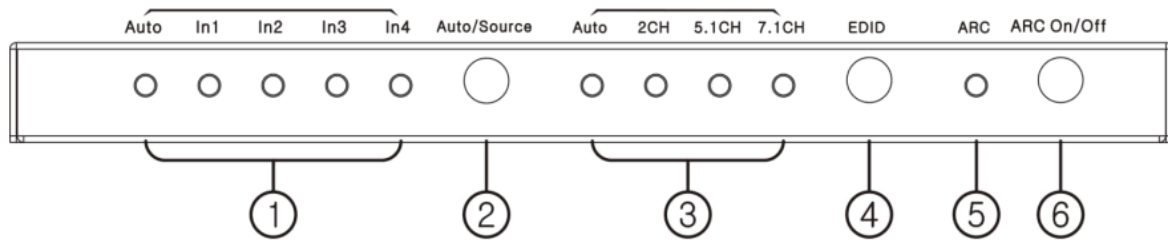


Front Panel:

1. Input indicator LED, the corresponding port LED will be illuminated when its port is selected.
2. Auto or manual select button:
Press this button >2 seconds to select auto switching or manual switching mode.
Under manual switching mode, short pressing this button to select the input port.
3. EDID status LED (Auto means using TV EDID).
4. EDID select button (Press this button to select EDID mode Auto/2.1CH/5.1CH/7.1CH)
5. ARC status LED (this LED will be illuminated if ARC is enabled successfully)
6. ARC function on/off button

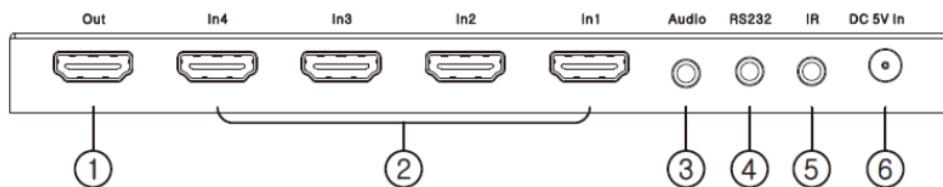

Rear Panel:

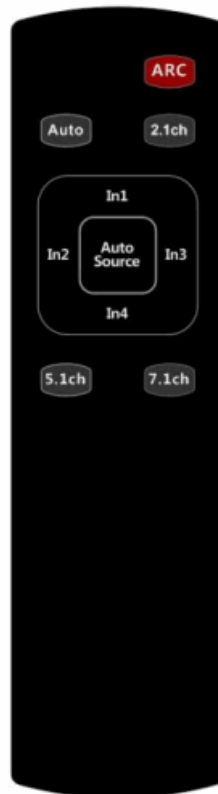

1. HDMI output port, connect with HDTV or monitor by HDMI cable

2. HDMI input ports, connect with DVD, PS4, or Set-top Box HDMI cable
3. Audio output (including L/R analog and optical audio out)
4. RS232 port
5. IR receiver port
6. DC 5V input port

IR Remote


ARC: Press this button to enable or disable the ARC function. ARC LED on the front panel will be illuminated if the ARC function is enabled successfully.

Auto/2.1ch/5.1ch/7.1ch: Press these buttons to select different EDID settings and the corresponding LED on the front panel will be illuminated.

Auto Source: Press this button to select auto switching or manual switching mode.

In1/In2/In3/In4: Under manual switching mode, press this button to select the input port.

Application Example

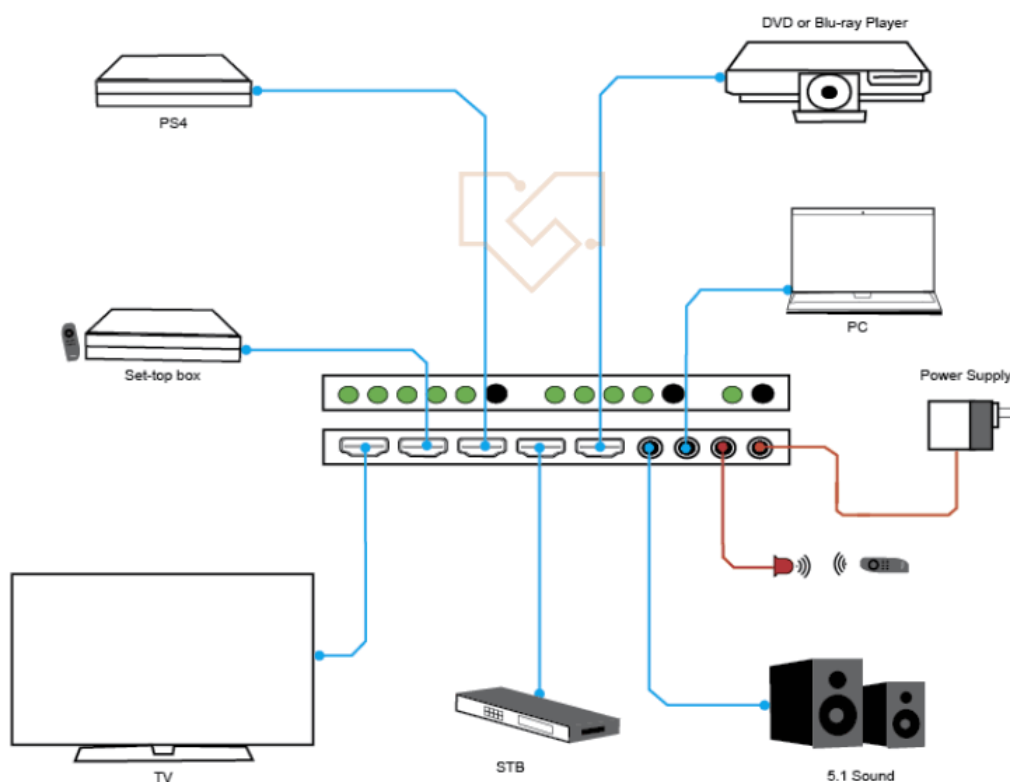

Documents / Resources

 VigilLink VL-SW41-1 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps	VigilLink VL-SW41-1 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps [pdf] User Manual VL-SW41-1 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps, VL-SW41-1, 4X1 HDMI 2.0 Switch with Audio ARC 18Gbps, Audio ARC 18Gbps, ARC 18Gbps, 4X1 HDMI 2.0 Switch, HDMI 2.0 Switch, Switch
--	--