



Home » WIOND » WIOND 86 Switch Series Self Generating Electricity Wireless Transmitter User

Manual ₹

Contents [hide]

- 1 WIOND 86 Switch Series Self Generating Electricity Wireless Transmitter
- 2 86 Switch Series transmitter specification
- 3 Operating Instructions
- 4 Installation Instructions
- 5 FCC Caution
- 6 Frequently Asked Questions
- 7 Documents / Resources
 - 7.1 References

WIOND

WIOND 86 Switch Series Self Generating Electricity Wireless Transmitter





Working Frequency: 433.92MHZ

• Power Mode: Kinetic energy self-generation

• Communication Mode: FSK/OOK

• Number of Buttons: 1-3 keys

• Color: White or custom made

• Weight: 32g-62g

• Switching Times: >200,000 cycles


Product Size: 86mm x 86mm x H17mm

• Launch Distance: 200m (outdoor), 50m (indoor)

Executive Standard: NE61058-1:2002+A2:2008; GB14536.1-2008

Self generating electricity wireless transmitter 86 Switch Series

Self generating electricity, Bringing Green intelligent life

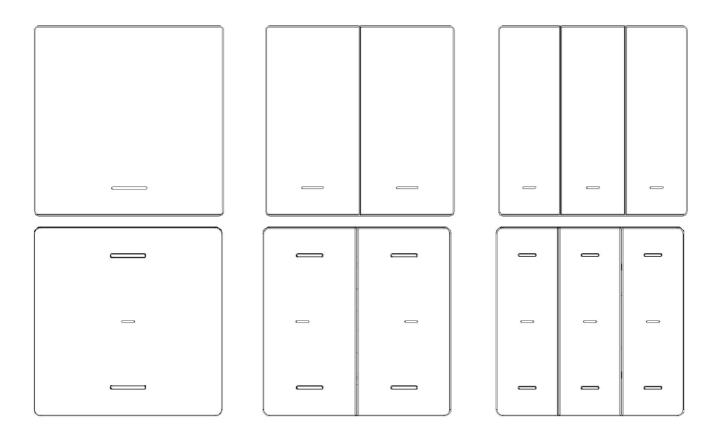


Self generating electricity wireless transmitter 86 Switch Series are without any electric wire and battery, safety and waterproof, easy to install and even can be operated with wet hands.86 Switch Series use innovative self generating electricity technology, the energies is collected at the moment of pressing that is used to transmit wireless signals, which freed from the trouble of wiring or battery replacement.

They need to be used together with the corresponding controller, which can be easily

used in various scenarios such as single control switch, double control switch, multi control switch, wireless doorbell, etc.

86 Switch Series transmitter specification

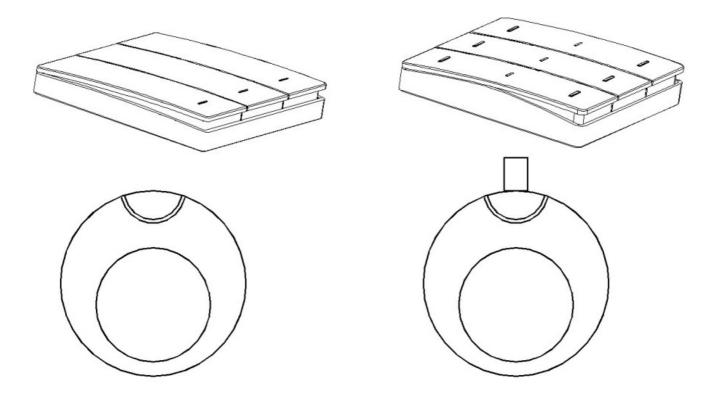

1. Selection: Round Reset Switch Product Size:φ55mm*H16mm


2. Selection: Round Reset Switch-Lanyard Product Size:φ55mm*H16mm

Note: The transmission distance is affected by the wall and maybe a little different with the actual measured value.

Type of work:	Reset / Seesaw	Power mode:	Kinetic energy self-generation
Working Frequency:	433.92MHZ	Communication Mode:	FSK/OOK


Number of buttons:	1-3 key	Color:	White or custom made
Weight:	32g-62g	Switching Times:	>200,000 times cycles
Product Size:	86mm*86mm*H 17mm	Launch Distance:	200M(outdoor), 50M (indoor)
Executive standard:	NE61058-1:2002+A2:2008 ; GB14536.1-2008		

86 Switch Series transmitter Application Scenarios Combination One

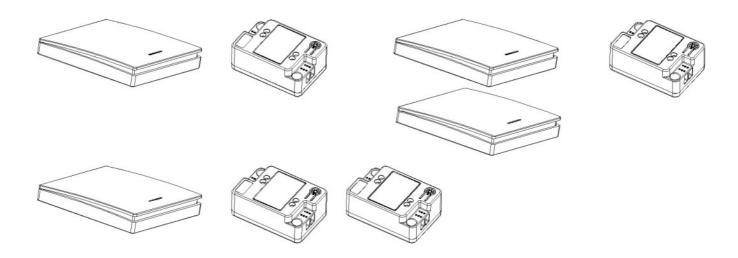


The transmitter can be placed anywhere for easy remote control

Combination Two

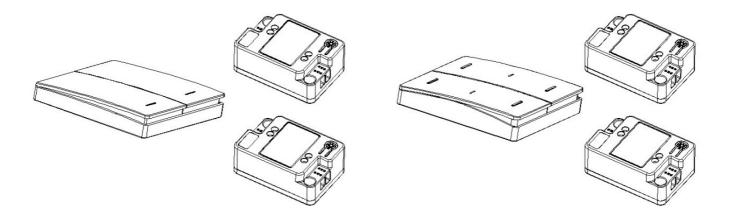

Easy to achieve two-way dual control, free combination!


Combination Three

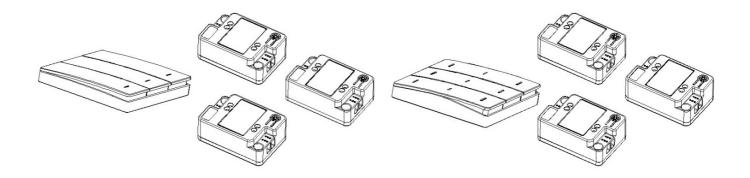

86 switch series can control three ways combination in 86 86 switch series can control three ways combination in one time. Do what you want.

Receiving part(Wiring part)

Before wiring, Non-professionals should not electrify the wiring. As shown in the figure, please pay attention to turn off the power.

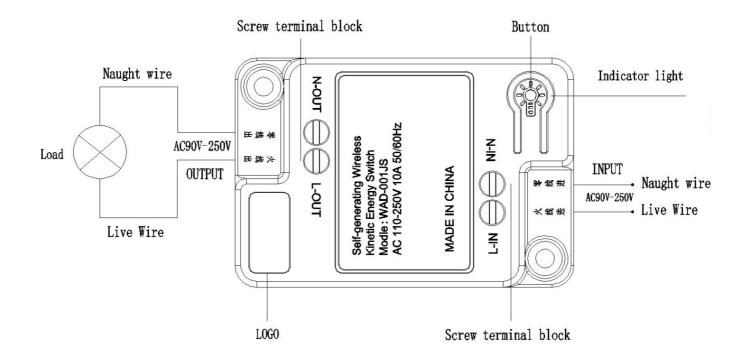

Operating Instructions

<Pairing>

When the receiver is powered on, press and hold the key for 3 seconds, the indicator light is always on, and enter the code allocation mode; press the switch once the indicator light flashes, and then one code allocation is successful.

And so on, up to 10 switches can be matched. When the receiver has 10 switches, and a new switch is equipped with it, the first switch will be replaced automatically.

Note: If there is no pairing switch within 10 seconds, the code matching will automatically end. Usually, press the button for a short time to turn on or off.

<Clear Binding Code>

Press and hold the button on the receiver until the indicator light turns on and flashes 3 times to clear all binding codes About 10 seconds.

<Default state setting of the circuit breaker after power outage>

Incoming call memory function: This product has a memory function, that is, the power is suddenly cut off when the light is on. After the power is turned on, the circuit breaker remembers the previous state, and the light will still brighten; when the light is not turned on, There is a sudden power outage, and the switch remembers the previous state after the power comes back, but the light is still not turned on.

Installation Instructions


1. You can place or move it at will, or fix it to your favorite location. Before fixing it, please try it in the desired location first, and then fix it if it does not affect normal use. The fixing methods are as follows:


Double-sided sticker, as shown in the figure: Use double-sided sticker, one side is attached to the bottom of the switch, and the other side can be attached to any place you like.

Special Tips:

Please avoid installing on metal objects (iron doors, iron windows, etc.) to avoid affecting the transmission distance. Please try it out before fixing it.

2.

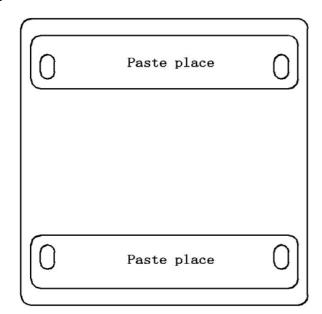


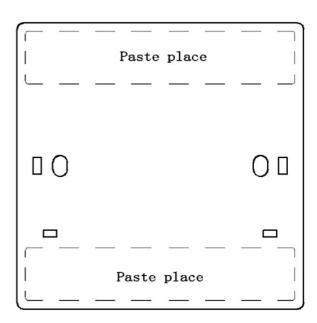


As shown in the figure, it can be fixed by screwed. Put it in the fixed position and try if it is feasible, Open the upper cover with a screwdriver, draw the positioning point, then punch holes on the wall with professional tools, install rubber plug, and fix the switch to the wall with screws.

Receiver Fixed Mode

As shown in the figure, it can be fixed by double-sided paste or screw

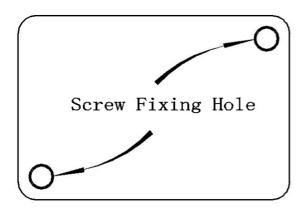

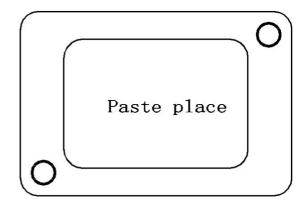

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

Frequently Asked Questions

What is the working frequency of the transmitter?

The working frequency of the transmitter is 433.92MHZ.

What is the launch distance of the transmitter?

The transmitter has a launch distance of 200 meters outdoors and 50 meters indoors.

How many buttons does the transmitter have?

The transmitter has 1 to 3 keys depending on the model.

Documents / Resources



WIOND 86 Switch Series Self Generating Electricity Wireless Transmitter

[pdf] User Manual

WAD-86QBFS1, 2BNW3-WAD-86QBFS1, 2BNW3WAD86QBFS1, 86 Switch Series Self Generating Electricity Wireless Transmitter, 86 Switch Series, Self Generating Electricity Wireless Transmitter, Generating Electricity Wireless Transmitter, Wireless Transmitter, Transmitter, Transmitter

References

User Manual

- **■** WIOND
- ▶ 2BNW3-WAD-86QBFS1, 2BNW3WAD86QBFS1, 86 Switch Series, 86 Switch Series Self Generating Electricity Wireless Transmitter, Electricity Wireless Transmitter, Generating Electricity Wireless Transmitter, Self Generating Electricity Wireless Transmitter, Transmitter, WAD-86QBFS1, WIOND, Wireless Transmitter

Leave a comment

Your email address will not be published. Required fields are marked * Comment * Name Email Website Save my name, email, and website in this browser for the next time I comment. **Post Comment** Search:

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

e.g. whirlpool wrf535swhz

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of

Search

these marks on this website does not imply any affiliation with or endorsement.					