


## KUZOR AZ3006-B

# KUZOR Matte Black Waterfall Bathroom Faucet AZ3006-B Instruction Manual

Model: AZ3006-B

## 1. INTRODUCTION

Thank you for choosing the KUZOR Matte Black Waterfall Bathroom Faucet. This manual provides detailed instructions for the proper installation, operation, and maintenance of your new faucet. Please read this guide thoroughly before installation and retain it for future reference.

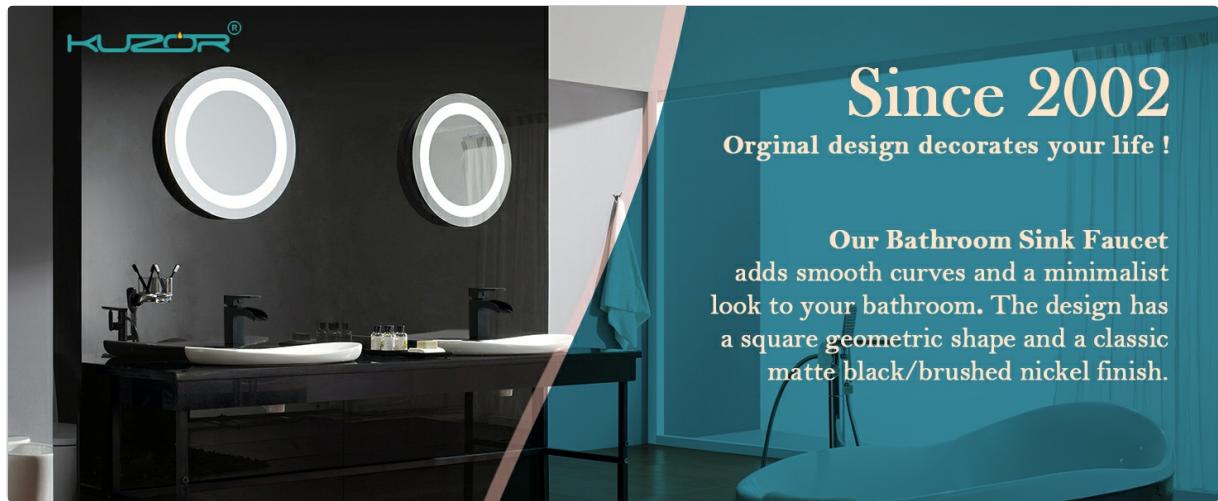

**Since 2002**  
Orginal design decorates your life !

Our Bathroom Sink Faucet adds smooth curves and a minimalist look to your bathroom. The design has a square geometric shape and a classic matte black/brushed nickel finish.

## 2. SAFETY INFORMATION

Please observe the following safety precautions during installation and use:

- Always turn off the main water supply before beginning any installation or repair work.
- Wear appropriate personal protective equipment, such as safety glasses and gloves.
- Ensure all connections are secure to prevent leaks. Do not overtighten.
- If you are unsure about any part of the installation process, consult a qualified plumber.
- Keep small parts away from children to prevent choking hazards.

### 3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- 1 x KUZOR Matte Black Waterfall Bathroom Faucet
- 1 x Metal Pop-Up Drain with built-in strainer
- 2 x Hot & Cold Water Supply Hoses (23.6 inches, Standard 3/8" compression threads)
- 1 x Deck Plate (6-inch)
- 1 x Fixing Part (Mounting hardware)
- 1 x Instruction Manual



Image 3.1: Overview of included components.



Image 3.2: Labeled components for easy identification.

#### 4. PRODUCT SPECIFICATIONS

<b>Brand</b>	KUZOR
<b>Model Name</b>	AZ3006-B
<b>Material</b>	Solid Brass
<b>Finish Type</b>	Matte Black
<b>Mounting Type</b>	Deck Mount
<b>Installation Type</b>	Single Hole
<b>Hole Count</b>	1 (or 3 with included deck plate)
<b>Number of Handles</b>	1
<b>Spout Height</b>	3.54 inches
<b>Spout Reach</b>	3.38 inches
<b>Item Weight</b>	2 pounds (approx. 28.08 oz)
<b>Maximum Flow Rate</b>	1.2 Gallons Per Minute
<b>Hose Length</b>	23.6 Inches
<b>Maximum Pressure</b>	140 PSI



Image 4.1: Faucet and drain dimensions.

## 5. INSTALLATION GUIDE

### 5.1 Before You Begin

- Ensure your sink has a single hole or a 3-hole configuration (the included deck plate covers 3 holes).
- The pre-drilled hole size requirement is 1.25 inches (32mm) minimum to 1.88 inches (48mm) maximum.
- Maximum countertop thickness: 1.41 inches (35.8mm).
- Turn off the main water supply to the bathroom.

### 5.2 Tools Required (Not Included)

- Adjustable Wrench
- Phillips Head Screwdriver
- Plumber's Putty or Silicone Sealant
- Teflon Tape
- Safety Glasses

### 5.3 Step-by-Step Installation

1. **Prepare the Sink:** If replacing an old faucet, remove it and clean the sink surface thoroughly. If your sink has three holes, place the deck plate over the holes.
2. **Install the Faucet:** Insert the faucet body through the hole(s) in the sink/deck plate. Ensure the faucet is centered and the handle is positioned correctly.
3. **Secure the Faucet:** From underneath the sink, slide the rubber washer, metal washer, and then the fixing nut onto the threaded shank of the faucet. Hand-tighten the nut, then use an adjustable wrench to secure it firmly. Do not overtighten.
4. **Connect Water Supply Hoses:** Attach the hot and cold water supply hoses to the corresponding inlets on the faucet body (typically marked with 'H' for hot and 'C' for cold). Hand-tighten, then use a wrench for a snug fit. Connect the other ends of the hoses to your hot and cold water supply valves. Use Teflon tape on the threaded connections of the supply valves for a leak-proof seal.
5. **Install the Pop-Up Drain:** Apply plumber's putty or silicone sealant around the flange of the pop-up drain. Insert the drain into the sink's drain hole. From underneath, secure the drain body with the rubber washer, friction washer, and mounting nut. Tighten securely. Connect the P-trap assembly to the drain body.
6. **Test for Leaks:** Slowly turn on the main water supply. Check all connections for leaks. Operate the faucet handle to ensure proper hot and cold water flow and temperature mixing.



Image 5.1: Pre-installation overview of faucet components and connections.

## 6. OPERATION

The KUZOR Waterfall Bathroom Faucet features a single handle for controlling both water flow and temperature.

- **Water Flow:** Lift the handle upwards to increase water flow. Push it downwards to decrease or stop the flow.
- **Temperature Control:** Move the handle to the left for hot water and to the right for cold water. The handle offers a 100-degree range of motion for precise temperature adjustment.

- **Waterfall Spout:** The wide spout creates a gentle waterfall effect, providing a smooth and comfortable water stream.

**EXCELLENT**  
*perfomance for daily use*

**KUZOR®**

Product Design Evaluator  
To provide a better sense of use.

Image 6.1: Faucet handle operation for flow and temperature.

# Waterfall Spout



**LEVEL A, H59 BRASS  
National Standard**

Why our products last 3 times longer



Image 6.2: The elegant waterfall spout in action.

## 7. CARE AND MAINTENANCE

Proper care will ensure the longevity and appearance of your KUZOR faucet.

- **Cleaning:** Clean the faucet regularly with a soft, damp cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the matte black finish.
- **Pop-Up Drain:** The metal pop-up drain includes a built-in strainer to prevent hair and debris from clogging. Periodically remove and clean the strainer to maintain optimal drainage.
- **Ceramic Cartridge:** The faucet is equipped with a leak-proof ceramic cartridge designed for up to 800,000 open/close cycles, ensuring long-lasting, drip-free performance.

UP TO  
**800K**  
OPEN / CLOSE TEST

**KUZOR**®

## Leak-proof

**CERAMIC  
CARTRIDGES**



Image 7.1: Internal view of the durable ceramic cartridge.

## 8. TROUBLESHOOTING GUIDE

Refer to the table below for common issues and their solutions.

Problem	Possible Cause	Solution
Low Water Flow	Aerator clogged; Water supply valves not fully open; Debris in water lines.	Clean or replace aerator; Ensure supply valves are fully open; Flush water lines.
Leaks from Faucet Base	Mounting nut loose; Improperly seated gasket.	Tighten mounting nut; Re-seat gasket with plumber's putty or silicone.

Leaks from Handle	Worn O-rings or cartridge.	Contact customer service for replacement parts.
Water Temperature Issues	Hot/cold supply lines reversed; Water heater issues.	Check and correct supply line connections; Consult water heater manual.
Pop-Up Drain Not Sealing	Improper installation; Debris preventing seal.	Reinstall drain with proper sealant; Clean drain mechanism.

## 9. WARRANTY AND CUSTOMER SUPPORT

KUZOR provides a 180-day warranty on this product. Additionally, the faucet is backed by a lifetime replacement warranty, reflecting our commitment to quality and customer satisfaction.

If you encounter any issues with the faucet's quality, installation, or require replacement parts, please do not hesitate to contact our customer service team. We are ready to assist you promptly and efficiently.

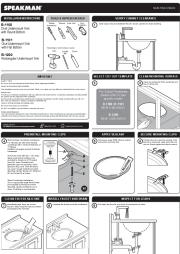
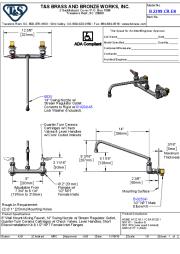
For support, please refer to the contact information provided with your purchase or visit the official KUZOR website.



Image 9.1: KUZOR faucet with Lifetime Replacement assurance.

### Related Documents - AZ3006-B

	<p><a href="#"><u>KUZOR AZ3004-B Matte Black Bathroom Faucet Installation and Troubleshooting Guide</u></a></p> <p>Comprehensive guide for installing and troubleshooting the KUZOR AZ3004-B matte black single-hole bathroom faucet. Includes dimension drawings, step-by-step installation procedures, and common problem solutions.</p>
--	--

	<p><b><a href="#">T&amp;S Big-Flo Kettle and Pot Sink Faucet Installation and Maintenance Instructions</a></b></p> <p>Comprehensive installation and maintenance guide for the T&amp;S Big-Flo Kettle and Pot Sink Faucet, models B-0290 and B-0291 series. Includes a detailed parts list, exploded view description, and step-by-step instructions in English.</p>
	<p><b><a href="#">Speakman Undermount Sink Installation Guide: B-1100, B-1101, B-1200</a></b></p> <p>Comprehensive installation instructions for Speakman's B-1100 Oval Undermount Sink (Round Bottom), B-1101 Oval Undermount Sink (Flat Bottom), and B-1200 Rectangular Undermount Sink. Includes tools, safety, maintenance, and detailed diagrams.</p>
	<p><b><a href="#">Tecnigrifos Waterfall Shower Head Negra VR-NXTTS004-B Installation and Technical Guide</a></b></p> <p>Comprehensive guide for the Tecnigrifos Waterfall Shower Head Negra VR-NXTTS004-B, covering technical specifications, general features, maintenance, and installation instructions.</p>
	<p><b><a href="#">APPASO Pull Out Kitchen Faucet - Installation and Maintenance Guide</a></b></p> <p>Detailed guide for the APPASO Pull Out Kitchen Faucet, covering specifications, installation guidance, maintenance procedures, and cleaning tips for optimal performance and longevity.</p>
	<p><b><a href="#">T&amp;S Brass B-2299-CR-EK 8-Inch Wall Mount Mixing Faucet   Technical Specifications &amp; Parts List</a></b></p> <p>Comprehensive technical specifications, features, and a detailed parts breakdown for the T&amp;S Brass B-2299-CR-EK 8-inch wall mount mixing faucet. Includes compliance information for ASME, CSA, NSF, and ADA standards.</p>