




## WyreStorm EXP-CON-AUD-H2 Digital and Analog Audio Extractor User Guide

[Home](#) » [WyreStorm](#) » WyreStorm EXP-CON-AUD-H2 Digital and Analog Audio Extractor User Guide 



Quickstart Guide

### Contents

- [1 Digital & Analog Audio Extractor with 18Gbps HDMI Passthrough](#)
- [2 EXP-CON-AUD-H2](#)
- [3 IMPORTANT! Installation Requirements](#)
- [4 In the Box](#)
- [5 Basic Wiring Diagram](#)
- [6 Front Panel](#)
- [7 Rear Panel](#)
- [8 Audio Connections](#)
- [9 Troubleshooting](#)
- [10 Troubleshooting Tips:](#)
- [11 Setup and Configuration](#)
- [12 EDID Switch Settings](#)
- [13 Specifications](#)
- [14 Documents / Resources](#)
  - [14.1 References](#)
- [15 Related Posts](#)

Digital & Analog Audio Extractor with 18Gbps HDMI Passthrough

**EXP-CON-AUD-H2**



WyreStorm recommends reading through this document in its entirety to become familiar with the product's features prior to starting the installation process.

**4K HDR** **2160p 4:4:4 60** **HDMI®** **HDCP 2.2**



### IMPORTANT! Installation Requirements

- Visit the product page to download the latest documentation.
- Read through the Wiring and Connections section for important wiring guidelines before creating or choosing premade cables.

### In the Box

1x EXP-CON-AUD-H2 Audio Converter  
1x 5V DC 1A Power Supply with Wall Adapters  
2x Mounting Brackets


### Basic Wiring Diagram



### Key

- HDMI
- Digital Audio
- Analog Audio

### Front Panel

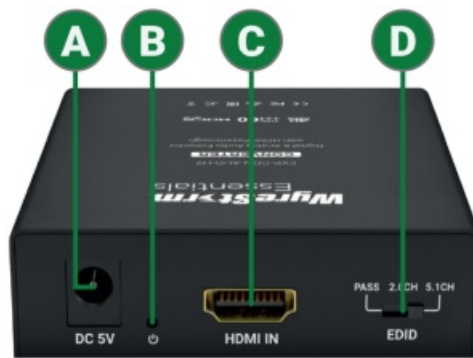

(A)	Power In	2.1mm DC Jack Input Connect to the included 5V DC 1A power supply.
(B)	Power LED	<b>Solid:</b> The unit is powered On <b>Off:</b> The unit is powered Off
(C)	HDMI In	19-pin type A HDMI female Supports HDMI and DVI/D with adapter
(D)	EDID Switch	Switch between Passthrough, 2ch and 5ch Audio Modes


## Rear Panel



(A)	<b>HDMI Output</b>	19-pin type A HDMI female Supports HDMI and DVI/D with adapter
(B)	<b>Optical Output</b>	Toslink optical port Connect to digital audio input of pre-amplifier, AVR or audio system
(C)	<b>Analog Audio Output</b>	2 x RCA (L/R Phono) Ports Connect to analogue audio input of preamplifier, AVR or audio system

## Audio Connections

### Analog Audio Out

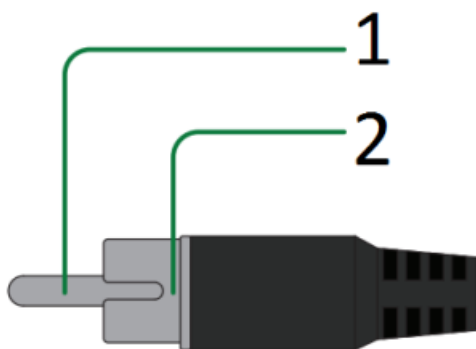

1. Tip: Audio Positive (+)
2. Shield: Audio Negative (-)

## Troubleshooting

### No or Poor Quality Picture (snow or noisy image)

- Verify that power is being supplied to the device
- Verify that all HDMI connections are not loose and are functioning properly


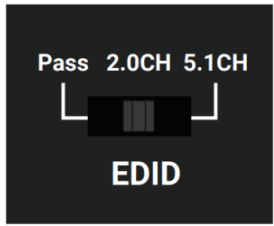
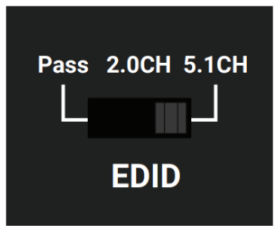


### Troubleshooting Tips:

- WyreStorm recommends using a cable tester or connecting the cable to other devices to verify functionality.

## Setup and Configuration

### EDID Switch Settings

Pass Through (Default)	Allows EDID pass-through from the display to the source for optimum video and audio outputs to the display.	 The image shows a black rectangular slider control. At the top, the text 'Pass 2.0CH 5.1CH' is displayed. Below this text is a horizontal track with three vertical bars of increasing height from left to right. The slider is currently positioned over the first, shortest bar, which is labeled 'Pass'. Below the track, the text 'EDID' is visible.
2.0CH	Transfers 2.0CH EDID of EXP-CON-AUD-H2 to the source for optimum video and 2.0CH audio outputs to the display.	 The image shows a black rectangular slider control. At the top, the text 'Pass 2.0CH 5.1CH' is displayed. Below this text is a horizontal track with three vertical bars of increasing height from left to right. The slider is currently positioned over the second, middle bar, which is labeled '2.0CH'. Below the track, the text 'EDID' is visible.
5.1CH	Transfers 5.1CH EDID of EXP-CON-AUD-H2 to the source for optimum video and 5.1CH audio outputs to the display.	 The image shows a black rectangular slider control. At the top, the text 'Pass 2.0CH 5.1CH' is displayed. Below this text is a horizontal track with three vertical bars of increasing height from left to right. The slider is currently positioned over the third, tallest bar, which is labeled '5.1CH'. Below the track, the text 'EDID' is visible.

### Note:

- If EDID Copy fails, a fixed 1920x1080p @60Hz 2.0CH would be provided to source device.
- In order to achieve a better user experience, please refer to the following audio support descriptions and examples for EDID setting during installation.

1. Slide the EDID to **Pass Through** (default) – Copy EDID from HDMI out.

Display Audio	HDMI Output Audio	S/PDIF Output Audio	L/R Output Audio
Dolby /DTS 7.1	Dolby/DTS 7.1	–	–
Dolby/DTS 5.1	Dolby/DTS 5.1	Dolby/DTS 5.1	–
PCM 7.1	PCM 7.1	PCM 2.0	PCM 2.0
PCM 5.1	PCM 5.1	PCM 2.0	PCM 2.0
PCM 2.0	PCM 2.0	PCM 2.0	PCM 2.0

By default (position “Pass Through”), when connected to a 1080p, PCM5.1 TV, the extractor will transmit the 1080p, PCM5.1 signal to it, S/PDIF Output audio is PCM2.0, and L/R Output Audio is PCM2.0.

2. Slide the EDID to **2.0CH** – The option with 2.0CH.

HDMI Output Audio	S/PDIF Output Audio	L/R Output Audio
PCM 2.0	PCM 2.0	PCM 2.0

Slide to position “2.0CH”, when connected to a 1080p/5.1ch TV, the extractor will transmit the 1080p/2.0ch signal to it, S/PDIF Output audio is PCM2.0, and L/R Output Audio is PCM2.0.

3. Slide the EDID to **5.1CH** – The option with 5.1CH

Display Audio	HDMI Output Audio	S/PDIF Output Audio	L/R Output Audio
Dolby /DTS 7.1	Dolby/DTS 7.1	–	–
Dolby/DTS 5.1	Dolby/DTS 5.1	Dolby/DTS 5.1	–
PCM 7.1	PCM 7.1	PCM 2.0	PCM 2.0
PCM 5.1	PCM 5.1	PCM 2.0	PCM 2.0
PCM 2.0	PCM 2.0	PCM 2.0	PCM 2.0

Slide to position “5.1CH”, when connected to a 1080p, PCM7.1 TV, the extractor will transmit the 1080p, PCM5.1 signal to it, S/PDIF Output audio is PCM2.0, and L/R Output Audio is PCM2.0.

Specifications

Audio and Video	
Inputs	1x HDMI In: 19-pin type A
Outputs	1x HDMI Out: 19-pin type A   1x RCA Female Stereo (L/R)   1x S/PDIF Toslink
Audio Formats	HDMI: 2ch PCM   Multichannel: LPCM and up to DTS-X and Dolby Atmos Analog: 2ch LPCM Toslink: 5.1ch surround sound

Video Resolutions (Max)	Resolution	HDMI
	1920x1080p @60Hz 12bit	15m/49ft
	1920x1080p @60Hz 16bit	7m/23ft
	3840x2160p @24Hz 10bit 4:2:0 HDR	7m/23ft
	3840x2160p @30Hz 8bit 4:4:4	5m/16ft
	3840x2160p @60Hz 10bit 4:2:0 HDR	5m/16ft
	4096x2160p @60Hz 8bit 4:2:0	5m/16ft
	4096x2160p @60Hz 8bit 4:4:4	3m/10ft
Supported Standards	DCI   RGB   HDR   HDR10   Dolby Vision up to 30Hz   HLG   BT.2020   BT .2100	
Maximum Pixel Clock	600MHz	
Communication and Control		
HDMI	HDCP 2.2   DVI-D supported with adapter (not included)	



<b>Power</b>	
<b>Power Supply</b>	5V DC 1A
<b>Max Power Consumption</b>	2.88W
<b>Environmental</b>	
<b>Operating Temperature</b>	0 to + 45°C (32 to + 113 °F), 10% to 90%, non-condensing
<b>Storage Temperature</b>	-20 to +70°C (-4 to + 158 °F), 10% to 90%, non-condensing
<b>Maximum BTU</b>	9.83 BTU/hr
<b>Dimensions and Weight</b>	
<b>Rack Units/Wall Box</b>	<1U
<b>Height</b>	22mm/0.87in
<b>Width</b>	80mm/3.15in
<b>Depth</b>	90mm/3.54in

<b>Weight</b>	0.23kg/0.51lbs
<b>Regulatory</b>	
<b>Safety and Emission</b>	CE   FCC   RoHS

**Note:** WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.

### Warranty Information

WyreStorm Technologies LLC warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on [wyrestorm.com](http://wyrestorm.com) for more details on our limited product warranty.



Copyright © 2020 WyreStorm Technologies | [wyrestorm.com](http://wyrestorm.com)  
EXP-CON-AUD-H2 Quickstart Guide | 200317

UK: +44 (0) 1793 230 343 | ROW: 844.280.WYRE (9973)  
[support@wyrestorm.com](mailto:support@wyrestorm.com)

### Documents / Resources

A small thumbnail image of the user guide cover, showing the product and some text.	<a href="#">WyreStorm EXP-CON-AUD-H2 Digital and Analog Audio Extractor</a> [pdf] User Guide EXP-CON-AUD-H2, Digital and Analog Audio Extractor, Analog Audio Extractor, Digital Audio E xtractor, Audio Extractor
---	--

### References

- [WyreStorm - Professional Audio Visual Solution Provider](#)