

[Manuals.plus](#) /

› [ESSEBAGNO](#) /

› ESSEBAGNO Big Pro 9019781 Kitchen Faucet with Mobile Spray Head - Instruction Manual

ESSEBAGNO 9019781

ESSEBAGNO Big Pro 9019781 Kitchen Faucet

Instruction Manual

INTRODUCTION

Thank you for choosing the ESSEBAGNO Big Pro 9019781 Kitchen Faucet. This manual provides detailed instructions for the proper installation, operation, and maintenance of your new faucet. Please read this manual thoroughly before installation and retain it for future reference.



Image: The ESSEBAGNO Big Pro 9019781 kitchen faucet, featuring a gold finish and a mobile spray head, installed in a kitchen setting.

SAFETY INFORMATION

Please observe the following safety precautions during installation and use:

- Always turn off the main water supply before beginning any installation or maintenance work.
 - Wear appropriate personal protective equipment, such as safety glasses and gloves.
 - Ensure all connections are secure to prevent leaks.
 - If you are unsure about any part of the installation, consult a qualified plumber.
 - Do not use abrasive cleaners or harsh chemicals on the faucet finish, as this may damage it.
-

PACKAGE CONTENTS

Verify that all components are present before starting the installation:

- ESSEBAGNO Big Pro 9019781 Kitchen Faucet (Main Unit)
- Mobile Spray Head (non-extractable)
- Stabilizing Support Bar
- ESSEFIX System (Tool-free fixing kit)
- Stainless Steel Flexible Hoses (Hot and Cold)
- Sealing Washers and Gaskets
- Mounting Hardware

SPECIFICATIONS

Feature	Detail
Model Name	Big Pro
Model Number	9019781
Brand	ESSEBAGNO
Product Dimensions (L x W x H)	5 x 27.1 x 48.3 cm
Item Weight	3.3 Kilograms
Material	Brass (body), Metal (handle)
Color	Gold
Finish Type	Brushed
Mounting Type	Deck Mount, Single Hole
Number of Handles	1
Handle Location	Right
Special Feature	Mobile Spray Head (non-extractable)
Spout Design	Swivel arm with spray head
Spout Height	9.5 Centimeters
Recommended Use	Kitchen
Certification	ACS (Accreditation of Sanitary Conformity)

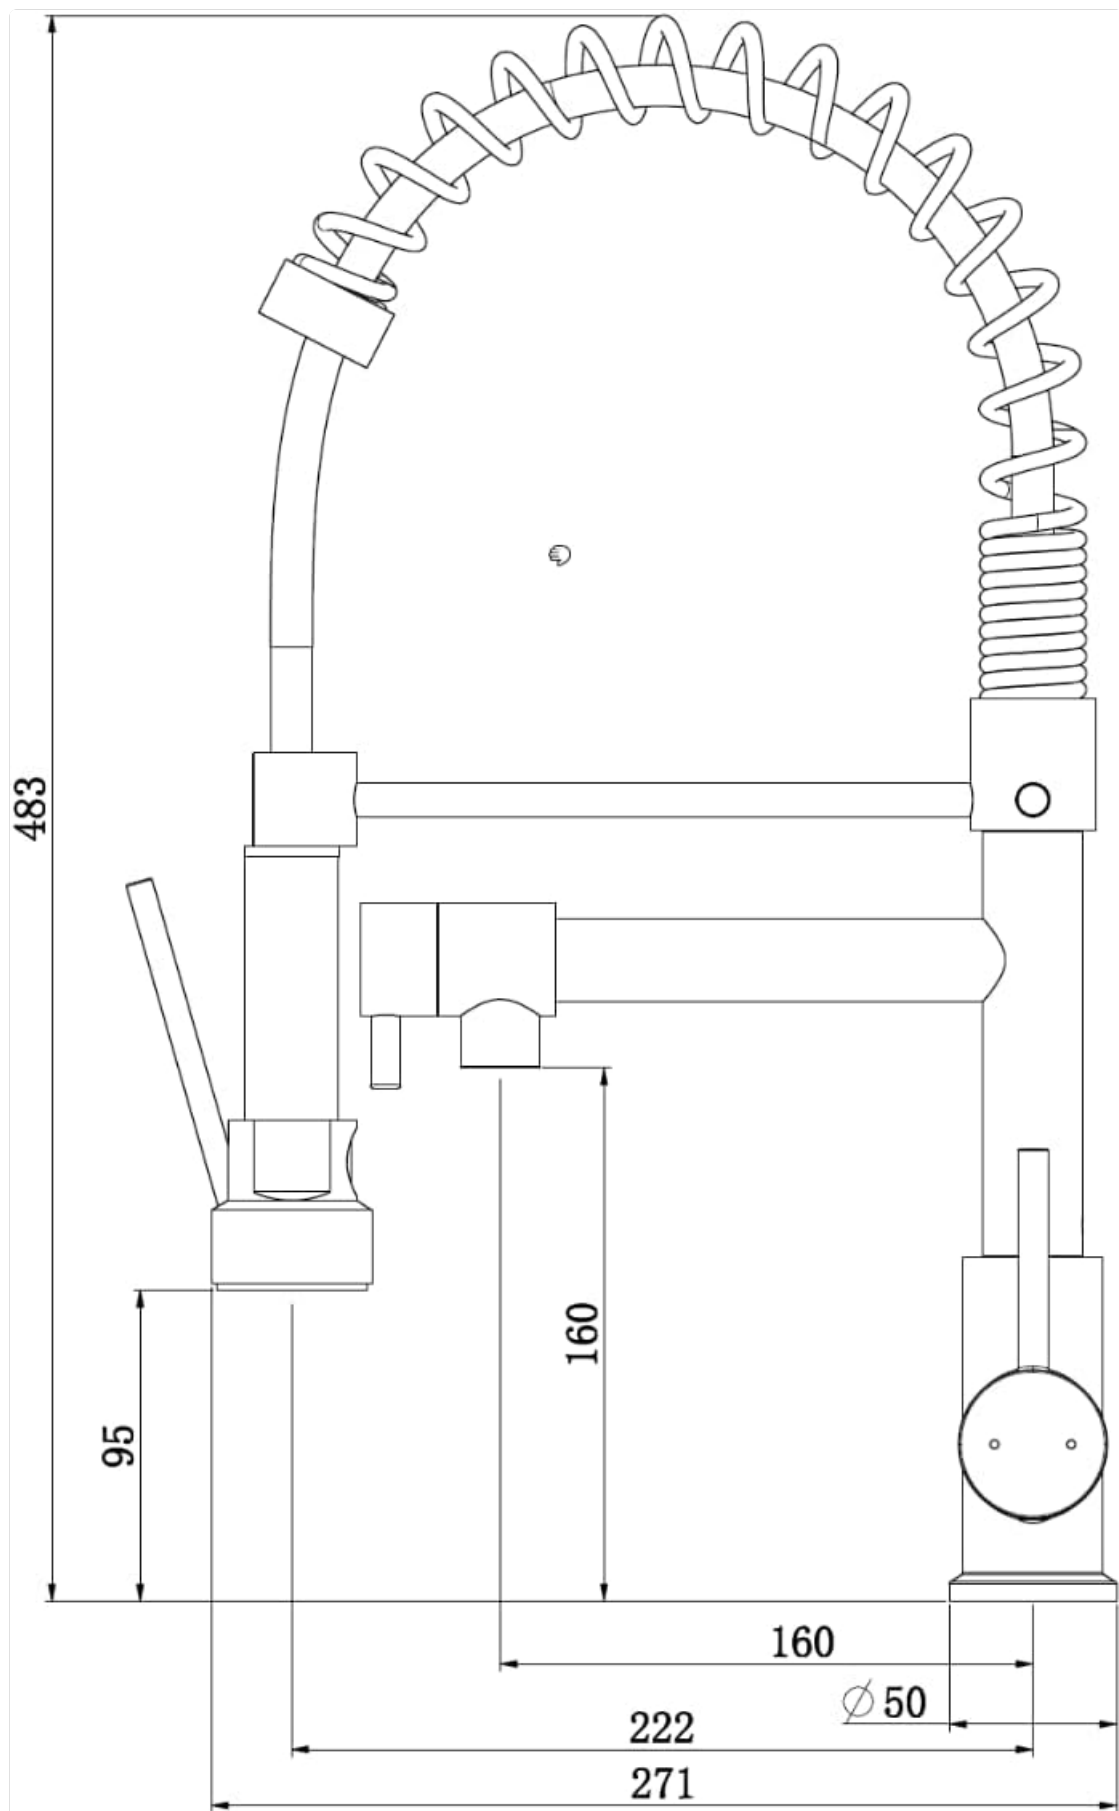


Image: Technical drawing illustrating the dimensions of the ESSEBAGNO Big Pro 9019781 faucet, including height, width, and spout reach.

INSTALLATION AND SETUP

This faucet is designed for single-hole deck mount installation. The ESSEFIX system allows for tool-free easy fixing.

Tools You May Need (Not Included):

- Adjustable wrench
- Phillips head screwdriver
- Plumber's tape (Teflon tape)
- Bucket and towels

Installation Steps:

1. **Prepare the Sink:** Ensure the mounting hole on your sink or countertop is clean and free of debris. The faucet requires a single hole for installation.
2. **Install the Faucet:**
 - Insert the flexible hot and cold water supply hoses into the base of the faucet.
 - Place the main faucet body through the mounting hole on the sink/countertop.
 - From underneath the sink, slide the rubber washer, metal washer, and then the ESSEFIX fixing nut onto the threaded shank of the faucet.
 - Tighten the ESSEFIX fixing nut by hand until snug. The ESSEFIX system is designed for tool-free tightening. Ensure the faucet is properly aligned before final tightening.
3. **Connect Water Supply:**
 - Apply plumber's tape to the threads of your hot and cold water supply valves.
 - Connect the flexible hoses from the faucet to the corresponding hot and cold water supply valves. Tighten with an adjustable wrench, but do not overtighten.
4. **Install Stabilizing Support Bar:** Attach the stabilizing support bar as indicated in the diagram (refer to technical drawing if available) to provide additional stability for the mobile spray head.
5. **Check for Leaks:**
 - Slowly turn on the main water supply.
 - Check all connections for leaks. If leaks occur, gently tighten the connections until they stop.
6. **Flush the Faucet:** Remove the aerator (if present) and turn on both hot and cold water for a few minutes to flush out any debris from the water lines. Reinstall the aerator.

OPERATING INSTRUCTIONS

Your ESSEBAGNO Big Pro 9019781 faucet features a single handle for water flow and temperature control, and a mobile spray head for versatile use.

Water Flow and Temperature Control:

- **Turn On/Off:** Lift the handle upwards to turn on the water. Push the handle downwards to turn off the water.
- **Adjust Flow:** The further you lift the handle, the greater the water flow.
- **Adjust Temperature:** Move the handle to the left for hot water and to the right for cold water. The handle location is on the right side of the faucet.

Using the Mobile Spray Head:

- The spray head is mobile and can be easily positioned for various tasks. It is designed to swivel and move within its range, but it is *not extractable* from the main faucet body.
- To direct water, simply grasp the spray head and move it to the desired position.
- The spout itself also features a swivel arm design, allowing for broad coverage of your sink.



Image: A detailed view of the faucet's single handle and the mobile spray head, illustrating its design and functionality.

MAINTENANCE

Regular cleaning and proper care will ensure the longevity and appearance of your ESSEBAGNO faucet.

- **Cleaning the Finish:** Clean the faucet regularly with a soft cloth and mild soap and water. Rinse thoroughly and dry with a soft cloth to prevent water spots.

- **Avoid Harsh Cleaners:** Do not use abrasive cleaners, scouring pads, ammonia-based cleaners, bleach, or other harsh chemicals, as these can damage the brushed gold finish.
- **Aerator Maintenance:** Periodically unscrew the aerator from the spout and clean any mineral deposits or debris that may have accumulated. This helps maintain optimal water flow.
- **Check for Leaks:** Occasionally inspect the connections under the sink for any signs of leaks. Tighten connections gently if necessary.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Low Water Flow	◦ Clogged aerator ◦ Partially closed shut-off valves ◦ Debris in water lines	◦ Clean or replace aerator. ◦ Ensure hot and cold shut-off valves are fully open. ◦ Flush water lines (refer to installation step 6).
Leaks at Faucet Base	◦ Loose mounting nut ◦ Improperly seated gasket	◦ Tighten the ESSEFIX fixing nut underneath the sink. ◦ Ensure rubber washer and metal washer are correctly positioned.
Leaks from Supply Lines	◦ Loose connections ◦ Insufficient plumber's tape	◦ Tighten supply line connections. ◦ Reapply plumber's tape and re-tighten connections.
Water Temperature Issues	◦ Hot/cold supply lines reversed ◦ Water heater issues	◦ Verify hot and cold supply lines are connected correctly. ◦ Check your water heater settings.

WARRANTY AND SUPPORT

ESSEBAGNO products are manufactured to high-quality standards. For specific warranty information, please refer to the documentation provided with your purchase or contact your retailer. For technical support or replacement parts, please contact ESSEBAGNO customer service through their official website or your point of purchase.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question