



XALOW W-MK03 Wireless Keyboard and Mouse Combo User Manual

[Home](#) » [XALOW](#) » XALOW W-MK03 Wireless Keyboard and Mouse Combo User Manual 




W-MK03 WIRELESS KEYBOARD AND MOUSE USER MANUAL

Contents

- [1 PRODUCT INTRODUCTION](#)
- [2 KEYBOARD BACK](#)
- [3 KEYBOARD FRONT](#)
- [4 MULTIMEDIA KEYS](#)
- [5 INSTRUCTIONS](#)
- [6 WARRANTY](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

PRODUCT INTRODUCTION

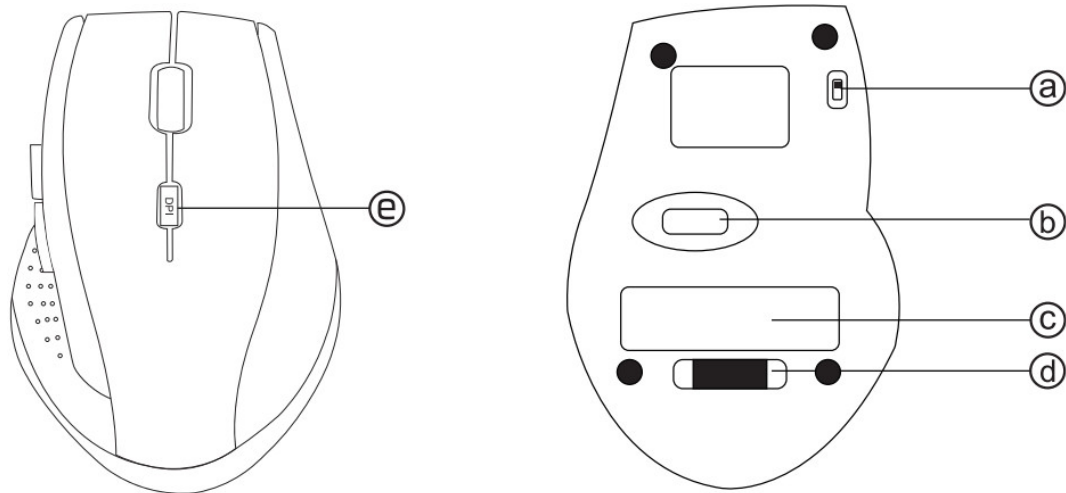

a Power ON/OFF Switch

Slide to left or right to power on or off.

b Optical Sensor

An optical sensor which could tell the mouse the direction and distance you move it.

c Battery Compartment

Need 2 sets of AAA batteries to power it up.

Battery not included.

d Receiver Slot

Where you can place the receiver.


Note: you can find the receiver here while first use.

e DPI Adjusting Button

Adjust DPI among 800 1200 1600 2000 and 2400.

Note: default DPI is 1600.

KEYBOARD BACK

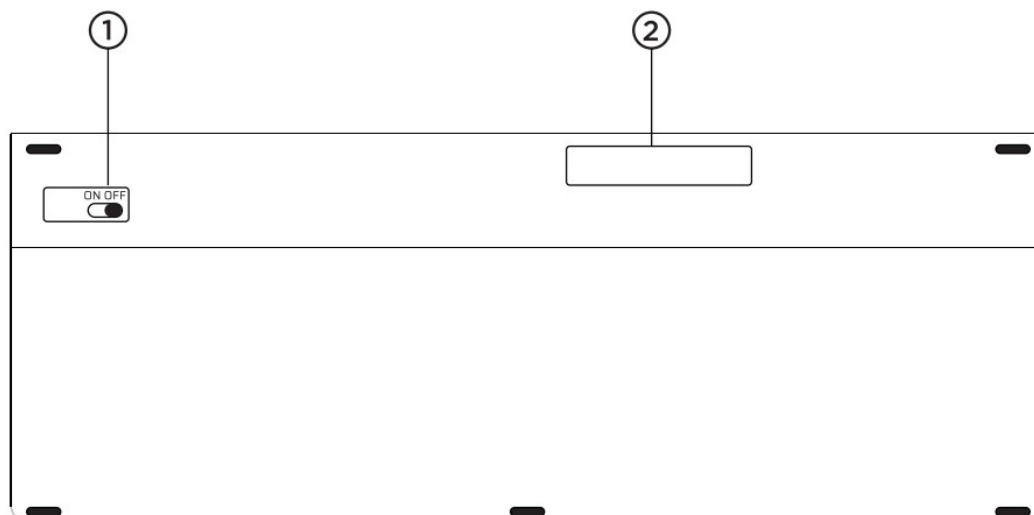

1 Power ON/OFF Switch


Slide to left or right to power on or off.

2 Battery Compartment

Need 2 sets of AA batteries to power it up.

Battery not included.

KEYBOARD FRONT

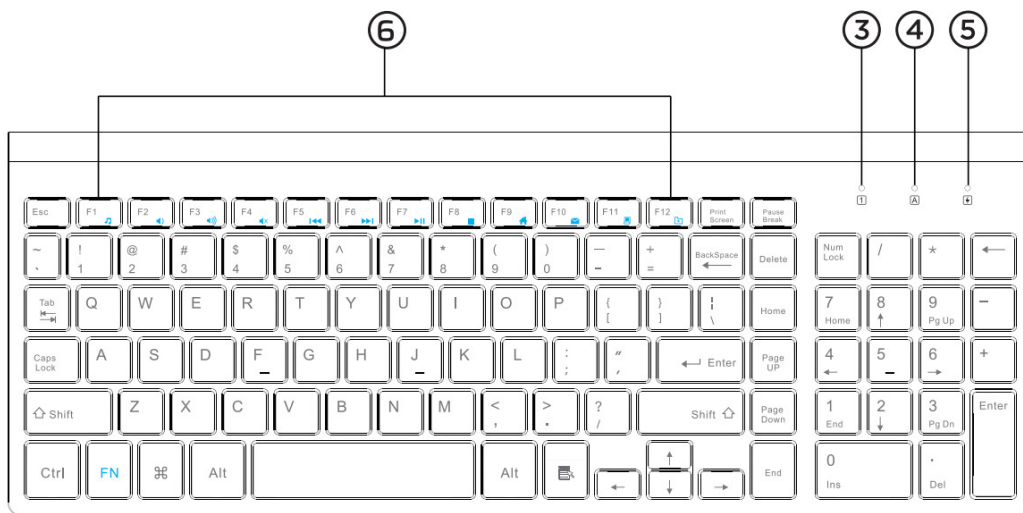

3 Number Pad Lock Indicator

The indicator lights up red when number pad unlocked.

*NOTICE: The indicator will turn off if you didn't type anything for 5 minutes.

It will light up when resuming typing.

The indicator doesn't light up on macOS, as mac doesn't support number lock.

4 Capital Indicator

INPUT CAPITAL LETTERS WHEN LIGHT IS ON

*NOTICE: The indicator will turn off if you didn't type anything for 5 minutes.

It will light up when resuming typing.

5 Power Indicator

Remind you working and battery status.

MULTIMEDIA KEYS

6 Multimedia Keys

Shortcuts to quick access media functions.

*NOTICE: These function keys may not perfectly match the function of the same keys on iMac, Macbook, Macbook pro, Macbook Air and other computer which runs a macOS X operating system.

Key	Fn + on Windows	Without Fn on Windows	Key	Fn + on Windows	Without Fn on Windows
	Media player	F1		Play/pause	F7
	Volume down	F2		Stop	F8
	Volume up	F3		Home page	F9
	Mute	F4		Email	F10
	Previous track	F5		My computer	F11
	Next track	F6		Favorite	F12

*Notice: Media player function will open your default media player set in your operating system.

Same as the Home page and Email function.

The Favorite function only work with browser who has favorite function, like IE, Firefox.

It doesn't support Chrome as far as we know.

INSTRUCTIONS

HOW TO POWER THEM UP

Open lid **2** on the bottom of the keyboard, put 2 AA batteries in and close the lid.

Switch the power switch **1** to "ON". Then ready to type.

Open lid **c** on the bottom of the mouse, put 2 AAA batteries in and close the lid.

Switch the power switch **a** to "ON". Then ready to click.

Batteries are not included in the package.

HOW TO USE

Turn the keyboard and mouse on.



Find the receiver under the mouse and plug it to your device. Wait for a few seconds till the driver automatically loaded.

You are now ok to click and type.

HOW TO PAIR

Rarely under some conditions, if exist, your keyboard and mouse lost contact with the receiver, please refer to steps shows below:

Keyboard

1. Turn off the keyboard and remove the receiver from your device.
2. Power on the keyboard and press  and  simultaneously for 3 times.
Check if the **5** indicator lights up red. If not, try again.
3. Plug the receiver back. Wait for a few seconds till the **5** indicator goes off.
4. If it doesn't work, start from the first step again.
5. Contact us if your keyboard doesn't work.

Mouse

1. Make sure the mouse charged properly and still has power.
2. Power off the mouse. Pull out the USB receiver from your device.
3. Power on the mouse and press Left button + Middle wheel + Right button simultaneously for at least 1 second.
4. Plug the receiver back to your device quickly.
Wait for a few seconds till the power indicator goes off
5. If it doesn't work, start from the first step again.
6. Contact us if your mouse doesn't work.

SLEEP MODE

The mouse will enter into sleep mode to reduce power consumption after idling for 30 minutes. Click any key to wake it up.

*Notice: Moving the mouse while in sleeping mode will not send to your device.

The keyboard will enter into sleep mode after idling for 5 minutes.

Any operation will wake it up immediately.

SPECIFICATIONS

	KEYBOARD	MOUSE
Compatibility	Windows, MacOS	Windows, MacOS
Operating consumption	3.0V / 0.7 mA	4.5 mA
Standby Current	0.003mA	0.03mA-0.3mA
Connection Frequency	2403.65-2479.65 MHz (16 channel)	2403.65-2479.65 MHz (16 channel)
Operation distance	within 30 feet	within 30 feet
Key life	3,000,000 strokes	5,000,000 strokes
Power supply	AA batteries * 2	AAA batteries *2

WARRANTY

Our keyboard and mouse come with an 1-year limited warranty, Email us your trouble along with the purchase proof for warranty claim.

You can also submit a warranty claim on our website or other ways shows below.


Need help? We provide life-time after-sales services.

Email info@halowgroup.com or visit www.halowgroup.com.

WHATSAPP +86-1353-7611-230	FACEBOOK www.facebook.com/halowgroup/
 https://wa.me/qr/BFIY4O3EFXSNO1	 https://www.facebook.com/halowgroup/



Documents / Resources

	XALOW W-MK03 Wireless Keyboard and Mouse Combo [pdf] User Manual W-MK03 Wireless Keyboard and Mouse Combo, W-MK03, Wireless Keyboard and Mouse Combo, Keyboard and Mouse Combo, Mouse Combo, Combo
---	---

References

- [User Manual](#)

Manuals+.